| | | |
|---|---|---|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek Black | |
| | Model No. Power Cord | |
| | Part No./Ordering No. SSS1582F1SSSP(R) | Rev B |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/
Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (https://en.globtek.com/terms-and-conditions/).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

### Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

### Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

## Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.
A delay in receipt of this form will delay delivery schedule.

| | |
|---|---|
| Company Name: | Customer P/N: |
| Quote Number: | Date: |
| Authorized Representative Name: | Authorized Representative Signature: |

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /09/09/2022 1:30:50 AM

| | | |
|---|---|---|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek Black | |
| | Model No. Power Cord | |
| | Part No./Ordering No. SSS1582F1SSSP(R) | Rev B |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

## REVISION HISTORY

| REV | DESCRIPTION | SUB | DATE | APPROVED |
|---|---|---|---|---|
| B | Update to SF format | QA | 05/26/2021 | QA |
| A | INITIAL RELEASE, RFS. 15634 | QA | 02/12/2009 | QA |

Cordset Information:
CordsetColor:GlobTek Black
Cord Length (mm):635±20


## NOTES:

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /09/09/2022 1:30:50 AM


| | | |
|---|---|---|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek Black | |
| | Model No. Power Cord | |
| | Part No./Ordering No. SSS1582F1SSSP(R) | Rev B |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

END A

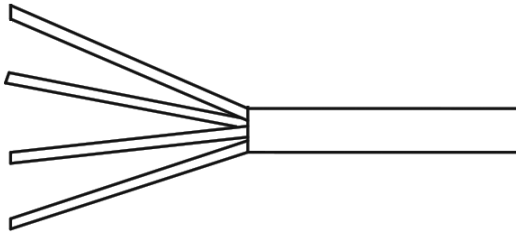

END B

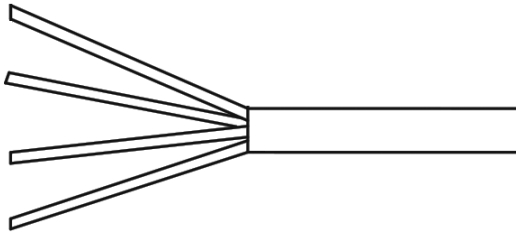


PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /09/09/2022 1:30:50 AM

| | | |
|---|---|---|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek Black | |
| | Model No. Power Cord | |
| | Part No./Ordering No. SSS1582F1SSSP(R) | Rev B |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

CABLE IMAGE

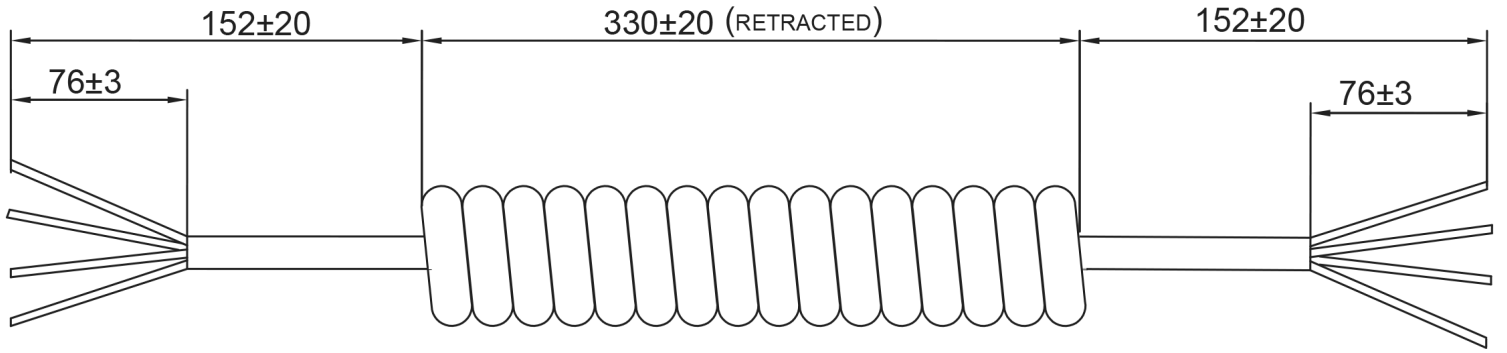


1. COIL OUTER DIAMETER: 25 + 5 mm
2. MARKING TO BE PRINTED INTO CABLE JACKET

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /09/09/2022 1:30:50 AM

| | | |
|---|---|---|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek Black | |
| | Model No. Power Cord | |
| | Part No./Ordering No. SSS1582F1SSSP(R) | Rev B |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

| End A | Cable | End B |
|---|---|---|
| Code:SSS | Code:158 | Code:SSS |
| Description:REMOVE OUTER JACKET, ENDS CUT BLUNT | Description:GT Cable #158: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL | Description:REMOVE OUTER JACKET, ENDS CUT BLUNT |
| Rating (V): | Color:GlobTek Black | Rating (V): |
| Rating (A): | Wire Gauge(AWG):18 | Rating (A): |
| Gender:N/A | Cond:4 | Gender:N/A |
| Overmolded:No | Type:SJT | Overmolded:No |
| | Temperature:105°° C | |
| | Amps:10 | |
| | Volts:300 | |
| | OD: | |
| | ConductorsColors:BLACK / WHITE / GREEN / RED | |

Overall cable rating:

| Plug Approvals | Cable Approvals | Connector Approvals |
|---|---|---|
| | OR<br>Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, andf cables total up to a UL approved cordset or cable assembly<br>LINK TO CERTs<br>Link to live Power Cords listing @ UL<br>Link to live Flexible Cord listing @ UL | UL<br>CSA<br>or<br>CUL |

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /09/09/2022 1:30:50 AM

| | | |
|---|---|---|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek Black | |
| | Model No. Power Cord | |
| | Part No./Ordering No. SSS1582F1SSSP(R) | Rev B |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

| | |
|---|---|
| AGENCY ONLINE DOCUMENTS | http://en.globtek.com/cordsets/ |
| RoHS/RoHS3 Declaration | https://www.globtek.com/pdf/rohs_cert/01t30000002p9DZAAY |
| REACH Declaration | https://www.globtek.com/pdf/iso_certificates/REACH.pdf |
| Conflict Minerals Declaration | https://www.globtek.com/pdf/conflict-minerals.pdf |
| Prop 65 Statement | https://en.globtek.com/prop-65-statement.pdf |
| CE.UKCA.Cord | https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t30000002p9DZ |

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /09/09/2022 1:30:50 AM

| | | |
|---|---|---|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek Black | |
| | Model No. Power Cord | |
| | Part No./Ordering No. SSS1582F1SSSP(R) | Rev B |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:Bulk, BUNDLE 25
Description:Bulk Packed in bundles of 25
Image:
N/A

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):

PROPRIETARY INFORMATION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022
guest /09/09/2022 1:30:50 AM