


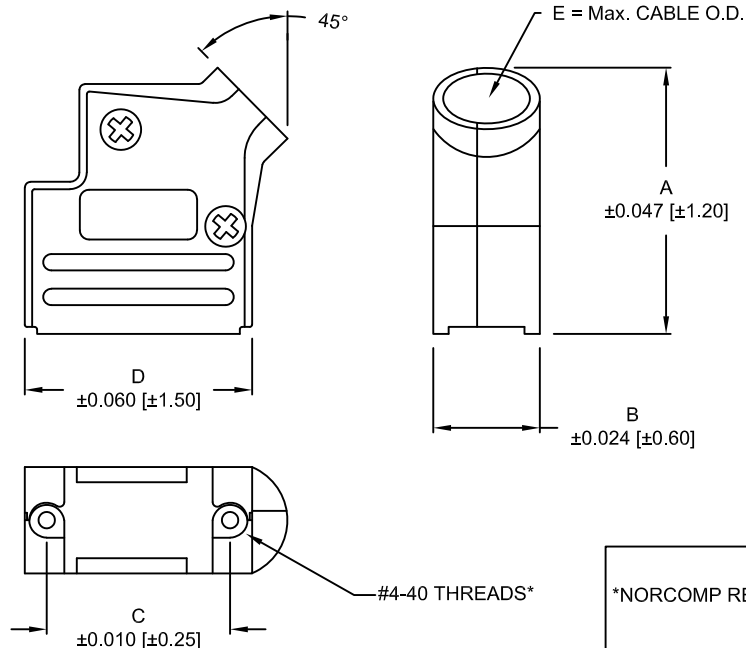

*NORCOMP RECOMMENDS PURCHASING OUR SLIDE LOCK HARDWARE.
MUST BE PURCHASED SEPARATELY.

SPECIFICATION:

BACKSHELL: ZINC, NICKEL PLATED,
COPPER UNDER PLATE
HOUSING SCREW: STEEL, ZINC PLATED
COMPRESSION INSERT: ABS, UL94-HB
OPERATING TEMPERATURE: -40°C TO +120°C

BACKSHELL KIT INCLUDES:

(2) BACKSHELL HALVES
(2) MOUNTING SCREWS
(1) PLASTIC INSERTS TREE (4-SETS)
DIAMETERS: 0.157 [4.00], 0.167 [5.00], 0.276 [7.00], 0.354 [9.00]

DIMENSIONS (in/mm)					
No. OF PINS	A	B	C	D	E
09	1.429	0.571	0.984	1.220	0.512
	36.30	14.50	24.99	31.00	13.00
15	1.587	0.571	1.312	1.555	0.512
	40.30	14.50	33.32	39.50	13.00
25	1.587	0.571	1.852	2.094	0.512
	40.30	14.50	47.04	53.20	13.00
37	1.587	0.571	2.500	2.744	0.512
	40.30	14.50	63.50	69.70	13.00

954-YYY-030R121

SERIES _____

POSITIONS _____

009 _____

015 _____

025 _____

037 _____

MATERIAL _____

030 = DIE CAST (NICKEL)

RoHS COMPLIANT _____

R = HIGH TEMP. PROCESS

COLOR _____

12 = NICKEL OVER COPPER

PUT-UP _____

1 = KIT

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE:

03/30/2007

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

3

DWG NO.

954-YYY-030R121