
FO-50360-L

WM-B4334

REV	DOCUMENT	CHANGED BY	CHECK
3	0041196	JA 01JUL08	ASD

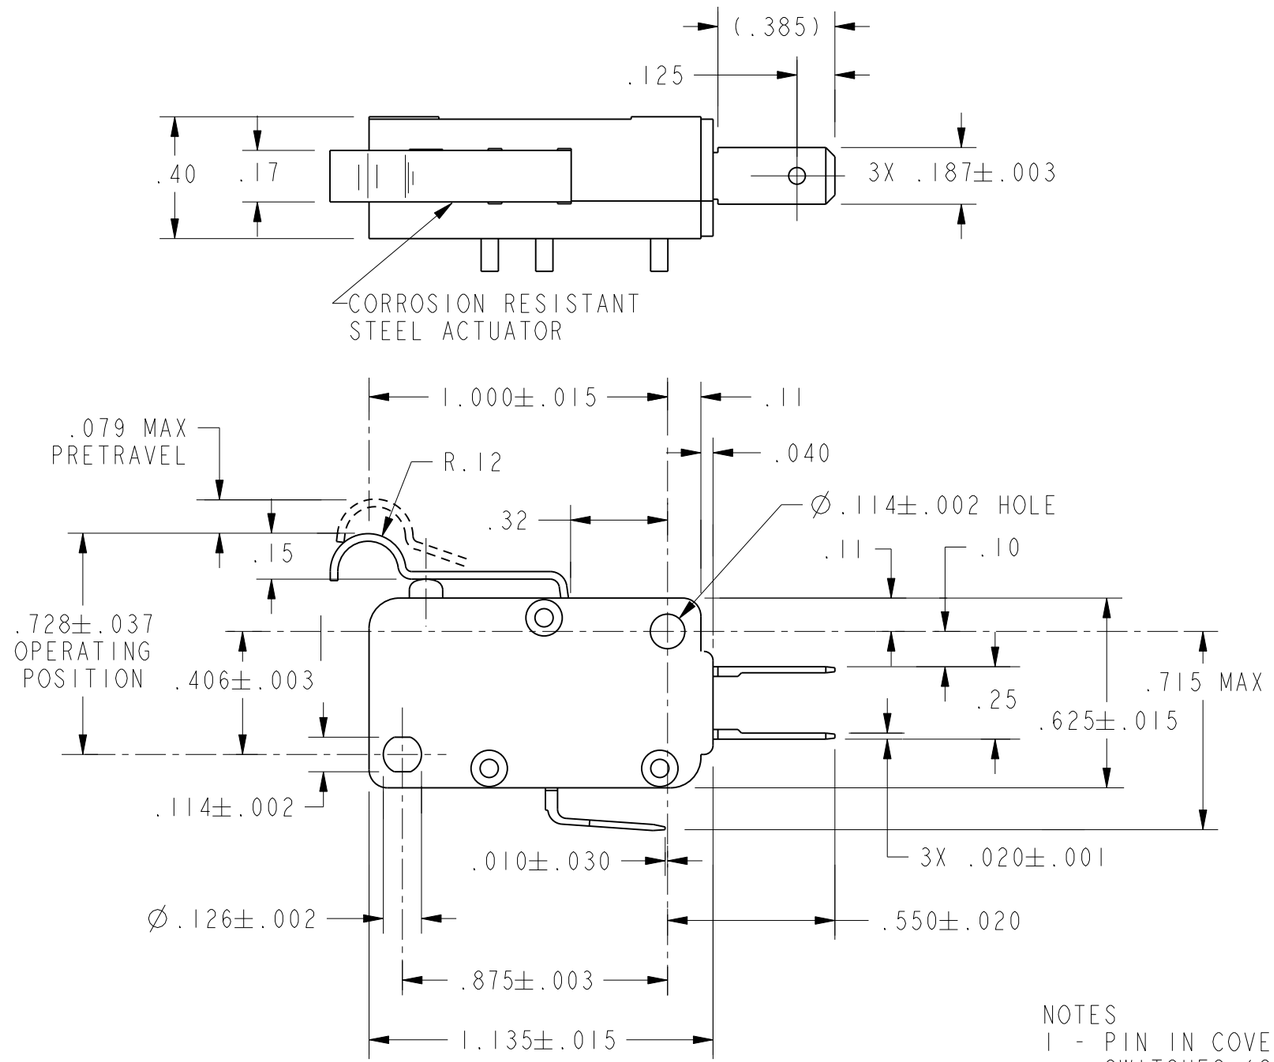

NOTES
1 - PIN IN COVER ALLOW FOR GANG ASSEMBLY OF SWITCHES (CASE HAS RECEPTACLES TO ACCEPT PINS)

CHARACTERISTICS	
OPERATING FORCE	127 GRAMS MAX
RELEASE FORCE	14 GRAMS MIN
DIFFERENTIAL TRAVEL	.018 MAX
OVERTRAVEL	.046 MIN
RELEASE TRAVEL	.011 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L215

15.1A 1/2HP 125, 250 OR 277 VAC
1/2 125VDC
1/4A 250 VDC; 5A 125 VAC "L"

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	TSM	02MAR00
CHECK	SAV	02MAR00

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	7VP34	3

SCALE 2:1 | WEIGHT | SHEET 1 OF 1