


PRODUCT CODE: AYL4845

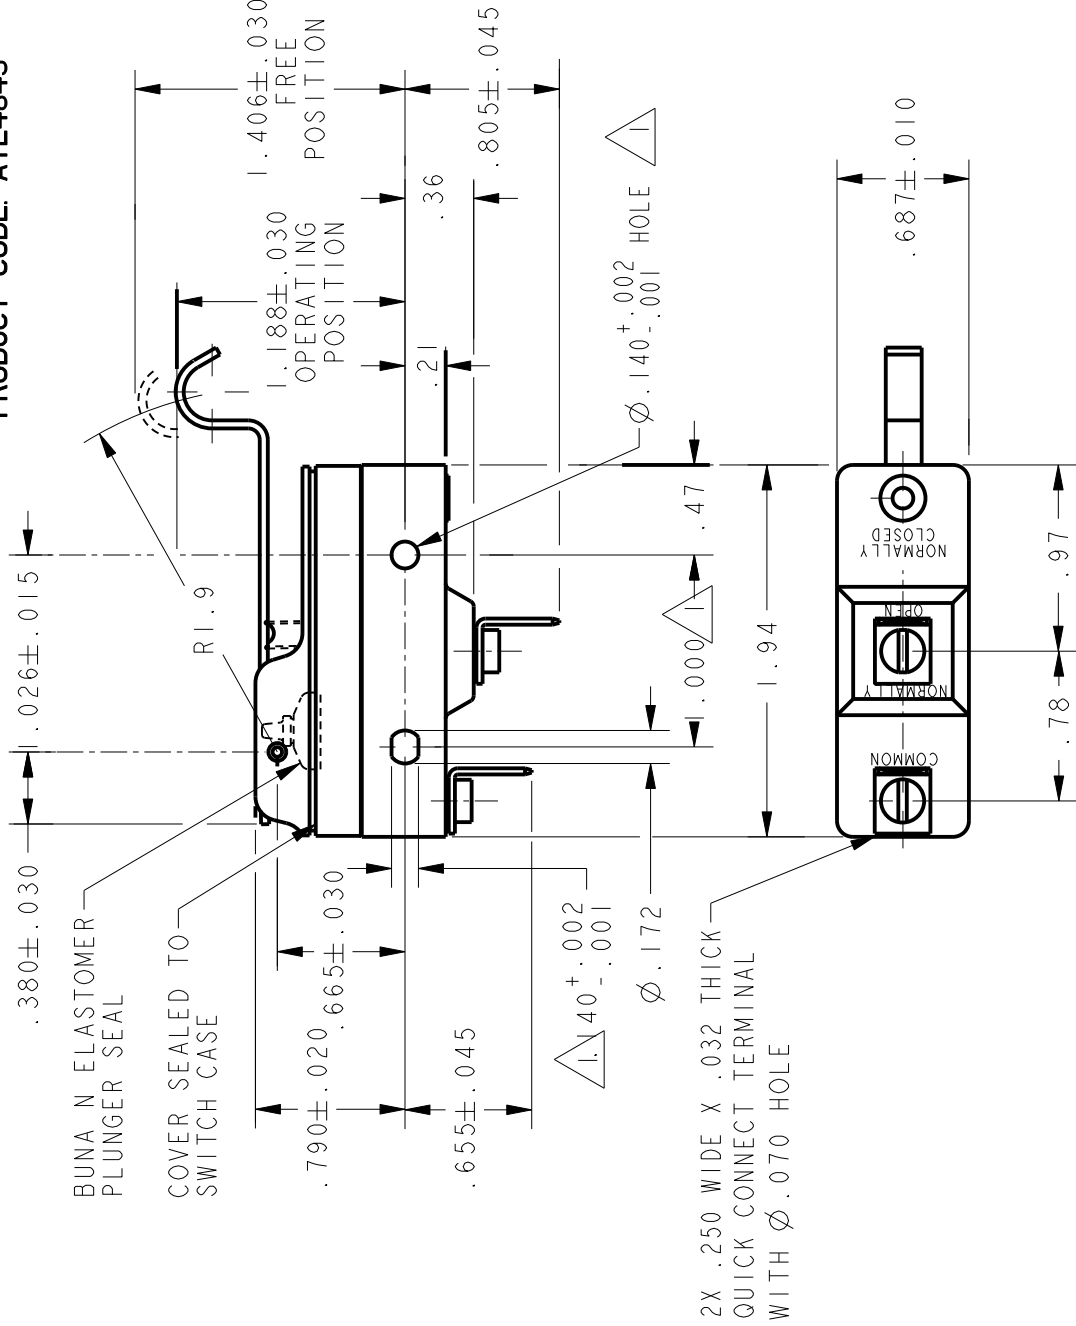

NOTES

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
- SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- CONTACT MATERIAL - GOLD ALLOY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



ELECTRICAL DATA		SCALE		DO NOT SCALE PRINT	
CONTACT ARRANGEMENT S P N 0		FULL		SCALE PRINT	
L22 1A 125 VAC		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		ONE PLACE (.0)	
L288		TWO PLACE (.00)		TWO PLACE (.00) $\pm .015$	
L307		THREE PLACE (.000)		THREE PLACE (.000) $\pm .005$	
L315		ANGLES		ANGLES \pm	
1A 250V T85 25E3		WEIGHT		.076 LB	

CHARACTERISTICS

OPERATING FORCE	----- 3 1/2 OZ MAX
RELEASE FORCE	----- 3/4 OZ MIN
DIFFERENTIAL TRAVEL	----- .004-.040
OVERTRAVEL	----- .156 MIN



A	200763	
TSM	14JUL00	23NOV05
B	0016786	
SPK		
	23NOV05	