PEPWAVE



MAX Adapter

State-of-the-art Cellular Modem at a breakthrough price point

Built to Last

Sturdy industrial-strength designed for continuous high-traffic operation.

Portable

The light and sleek enclosure offers portability in the palm of your hands.

Compatible with 5G

Meet the ever increasing connectivity needs with the MAX Adapter 5G.

Stay Connected


With two SIM slots, the MAX Adapter always has a way to connect.

SPEEDFUSION Connect LTE/5G

SpeedFusion Connect LTE/5G

With a built-in eSIM, achieving on-demand data to minimize data wastage and optimize your connectivity is simple. Do not settle for less, choose SpeedFusion Connect LTE/5G.

Learn more

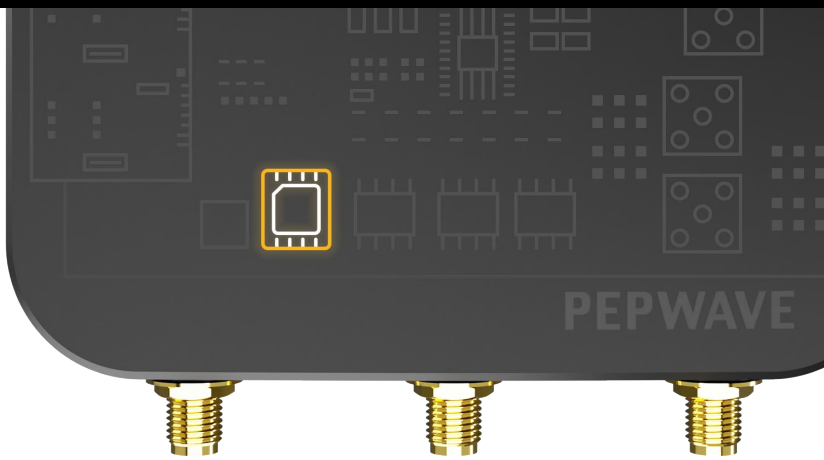

©Peplink | Pepwave. All rights reserved.

PEPWAVE

Connect with

Peplink Products

Protect and reinforce products^ with a USB port and make it a 5G/LTE WAN.






Windows & Linux* Devices

Providing 5G/LTE connectivity for Windows and Linux devices on-the-go.

Non-Peplink Devices

Place anywhere to optimize cellular reception, reduce truck rolls, expand infrastructure, and maximize uptime for businesses that require always-on connectivity.

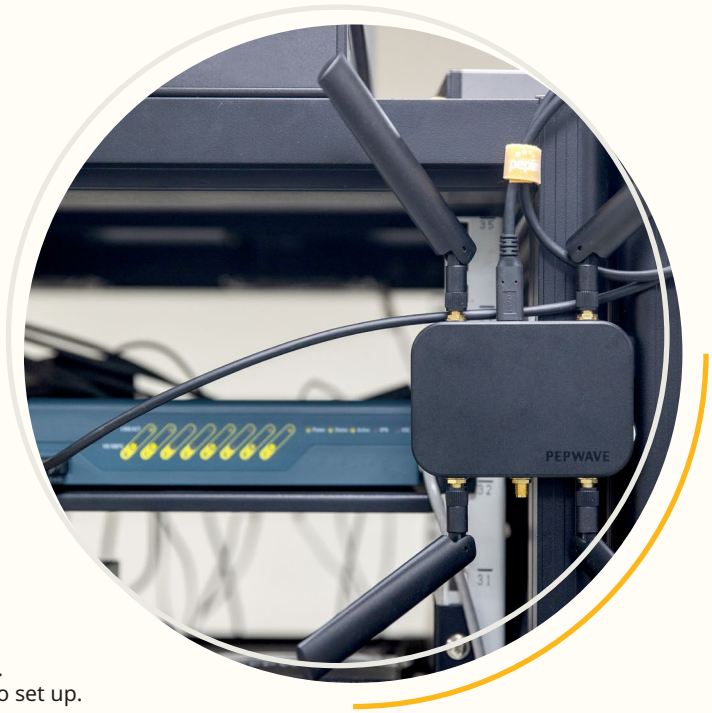

^ For compatible models, please refer to the MAX Adapter product page.
* For users on the Linux, please refer to our MAX Adapter user manual to set up.

©Peplink | Pepwave. All rights reserved.

MAX Adapter 5G

PEPWAVE



Specifications

Cellular WAN Interfaces	Single 5G Modem
Redundant SIM Slot	Yes
Downlink/ Uplink Datarate	5G: 4 Gbps / 700 Mbps LTE CAT-20: 2 Gbps / 150 Mbps
Antenna Connectors	4x SMA Cellular
Power Input	5V USB-C
Power Consumption	5W (nominal), 8W (max.)
Dimensions	3.9 x 2.8 x 0.7 inches / 100 x 71 x 18.4 mm
Weight	120g

Operating Temperature	32° – 104°F / 0° – 40°C
Humidity	15% – 95% (non-condensing)
Warranty	1-Year Limited Warranty
Certifications	FCC, CE, IC
Package Content	MAX Adapter 5G, 4x LTE/5G LTE Antennas (ACW-235), USB-C Female to USB-A Male Adapter, USB-C Power Cable
US Carrier Certifications	AT&T, T-Mobile, US Cellular, Verizon

Ordering Information

Product Code	Carrier / Category	5G Bands	LTE Bands
MAX-ADP-5GH-T	Global / 5G	**5G (NSA) Sub 6Ghz:** n1, n2, n3, n5, n28, n41, n66, n71, n77, n78, n79	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32,B34, B38, B39, B40, B41, B42, B46, B48, B66, B71

©Peplink | Pepwave. All rights reserved.

MAX Adapter

PEPWAVE



Specifications

Cellular WAN Interfaces	Single LTE Modem
Redundant SIM Slot	Yes
Downlink/ Uplink Datarate	CAT-12: 600 Mbps / 150 Mbps CAT-6: 300Mbps / 50Mbps
Antenna Connectors	2x SMA Cellular, 1x SMA GPS
Power Input	5V USB-C
Power Consumption	5W (nominal), 8W (max.)
Dimensions	3.9 x 2.8 x 0.7 inches / 100 x 71 x 18.4 mm
Weight	120g
Operating Temperature	32° – 104°F / 0° – 40°C
Humidity	15% – 95% (non-condensing)
Warranty	1-Year Limited Warranty
Certifications	FCC, CE, IC
Package Content	MAX Adapter, 2x LTE Antennas (ACW-813), USB-C Female to USB-A Male Adapter, USB-C Power Cable
US Carrier Certifications	AT&T, T-Mobile, Verizon

Ordering Information

Product Code	Carrier / Category	LTE Bands	3G Bands
MAX-ADP-LTEA-K-T	Global CAT-12	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66	HSPA+: B1, B2, B4, B5, B6, B8, B9, B19
MAX-ADP-LTEA-R-T	America CAT-12	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B14, B18, B19, B20, B26, B29, B30, B32, B41, B42, B43, B46, B48, B66	HSPA+: B1, B2, B4, B5, B6, B8, B9, B19
MAX-ADP-LTEA-W-T	Global CAT-6	B1, B2, B3, B4, B5, B7, B8 , B12, B13, B20, B25, B26, B29, B30, B41	WCDMA/HSPA+/DC-HSPA+: B1, B2, B3, B4, B5, B8

Accessories

Product Code	Description
ACW-232	GPS Antenna

©Peplink | Pepwave. All rights reserved.