

070516	RoHS COMPLIANT

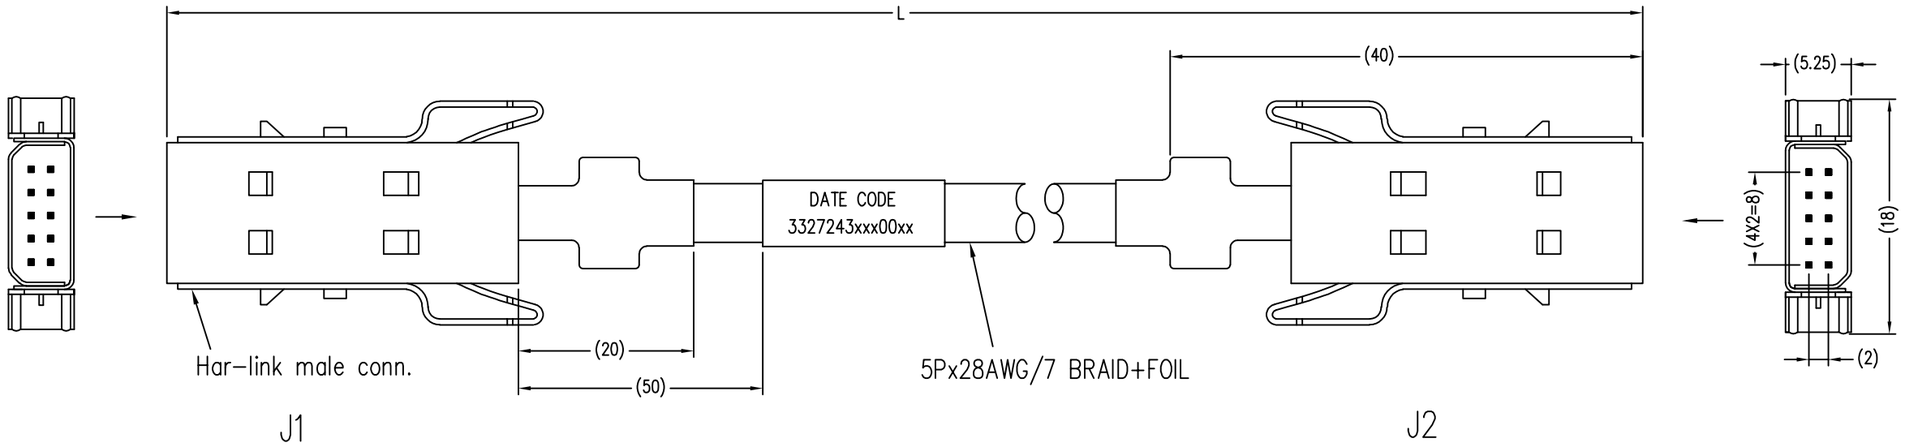

WIRING INFORMATION

	J1	Wire color	J2
⨯	2-e	Rose	2-e
	1-e	Orange	1-e
⨯	2-d	Yellow	2-d
	1-d	Rose	1-d
⨯	2-c	Rose	2-c
	1-c	Brown	1-c
⨯	2-b	Black	2-b
	1-b	Rose	1-b
⨯	2-a	Rose	2-a
	1-a	Red	1-a
	Shell	Braid	Shell



NOTES /

1.) CABLE ASSEMBLY IS MANUFACTURED PER RELEVANT JOB.

2.) MECHANICAL REQUIREMENTS
- OPERATING TEMPERATURE = -20° TO +105°C
- MATING CYCLES : 250, PERFORMANCE LEVEL 2 (IEC 60512-5)

3.) THE CONNECTOR COMPLIES REQUIREMENT : IEC 61076-4-107

4.) WHITE LABEL INFORMATION:

DATE CODE HARTING P/N

5.) CABLE MUST BE PERFORMED HI-POT TEST AND CONTINUITY TEST

6.) CABLE MUST BE PACKED INTO A PLASTIC BAG.

Part-No.	Dim. L
33 27 242 250 0021	25 m
33 27 242 200 0021	20 m
33 27 242 150 0021	15 m
33 27 243 150 0002	1.5 m
33 27 243 700 0019	7 m
33 27 242 120 0055	12 m
33 27 243 350 0029	3.5 m
33 27 243 400 0028	4 m
33 27 243 300 0027	3 m
33 27 243 060 0026	0.6 m
33 27 242 100 0021	10 m
33 27 243 800 0020	8 m
33 27 243 650 0019	6.5 m
33 27 243 200 0003	2 m
33 27 243 100 0002	1 m
33 27 243 050 0001	0.5 m

Rev.	Description	Appr.	Date
C	Add length 20m & 25m via CRZ2274	Ivy Lin	09/12/21
B	Add length 1.5m & 15m via CRZ2259	Ivy Lin	20/10/21
A	Prototype	Lucy Zheng	28/06/17

All Dimensions in mm
Original Size DIN A3

Scale /
Free size tol. /
Ref. /
Sub. /

All rights reserved

Department HCS - CN

HARTING Customised Solutions
D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
LINI	LIANL	LIANL	2021-12-09	Final release

Title: Har-link standard cable,male double ended cable assy, L=*M

Doc-Key / ECM-Nr.: /

Type: TB
Number: 33 27 0001
Rev.: C
Page: 1/1

A3