

MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V3L–3339
CQ–X2868

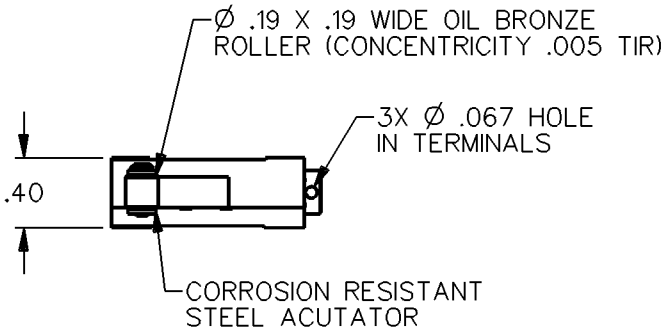

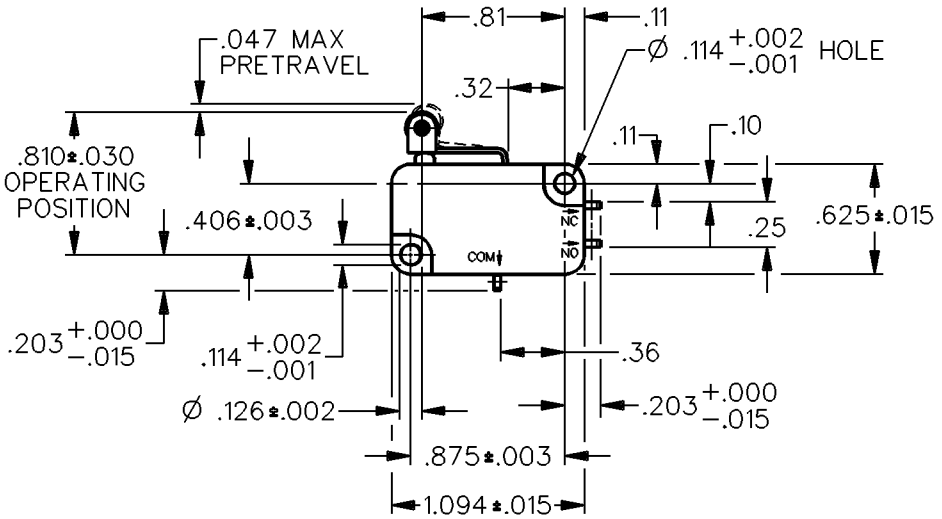

NOTES
1 – TERMINALS ARE SILVER PLATED FOR SOLDERING
2 – SWITCH MATERIAL WILL WITHSTAND TEMPERATURE OF 300°°F
3 – HOLE IN TERMINALS MAY BREAK OUT

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL — DO NOT SCALE PRINT
OPERATING FORCE — — — 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE FORCE — — — — 15 GRAMS MIN		ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL — — — .002–.010	L83 15.1A 1/2HP 125, 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"	TWO PLACE (.00) ±.015
OVERTRAVEL — — — — — — .040 MIN		THREE PLACE (.000) ±.005
RELEASE TRAVEL — — — — — .007 MIN		ANGLES ±
		WEIGHT

REVISIONS
A CO–76298 JAK 11 NOV 93

DRAWN J A L 9 MAR 92 — CHECK — DDM/CAD — CHECK — D C S 18 MAR 92 — CHECK

ISSUE 2 — CATALOG LISTING V3L–3339 — RELEASE NO. PR–19362 — REPLACES X91253–V3L