


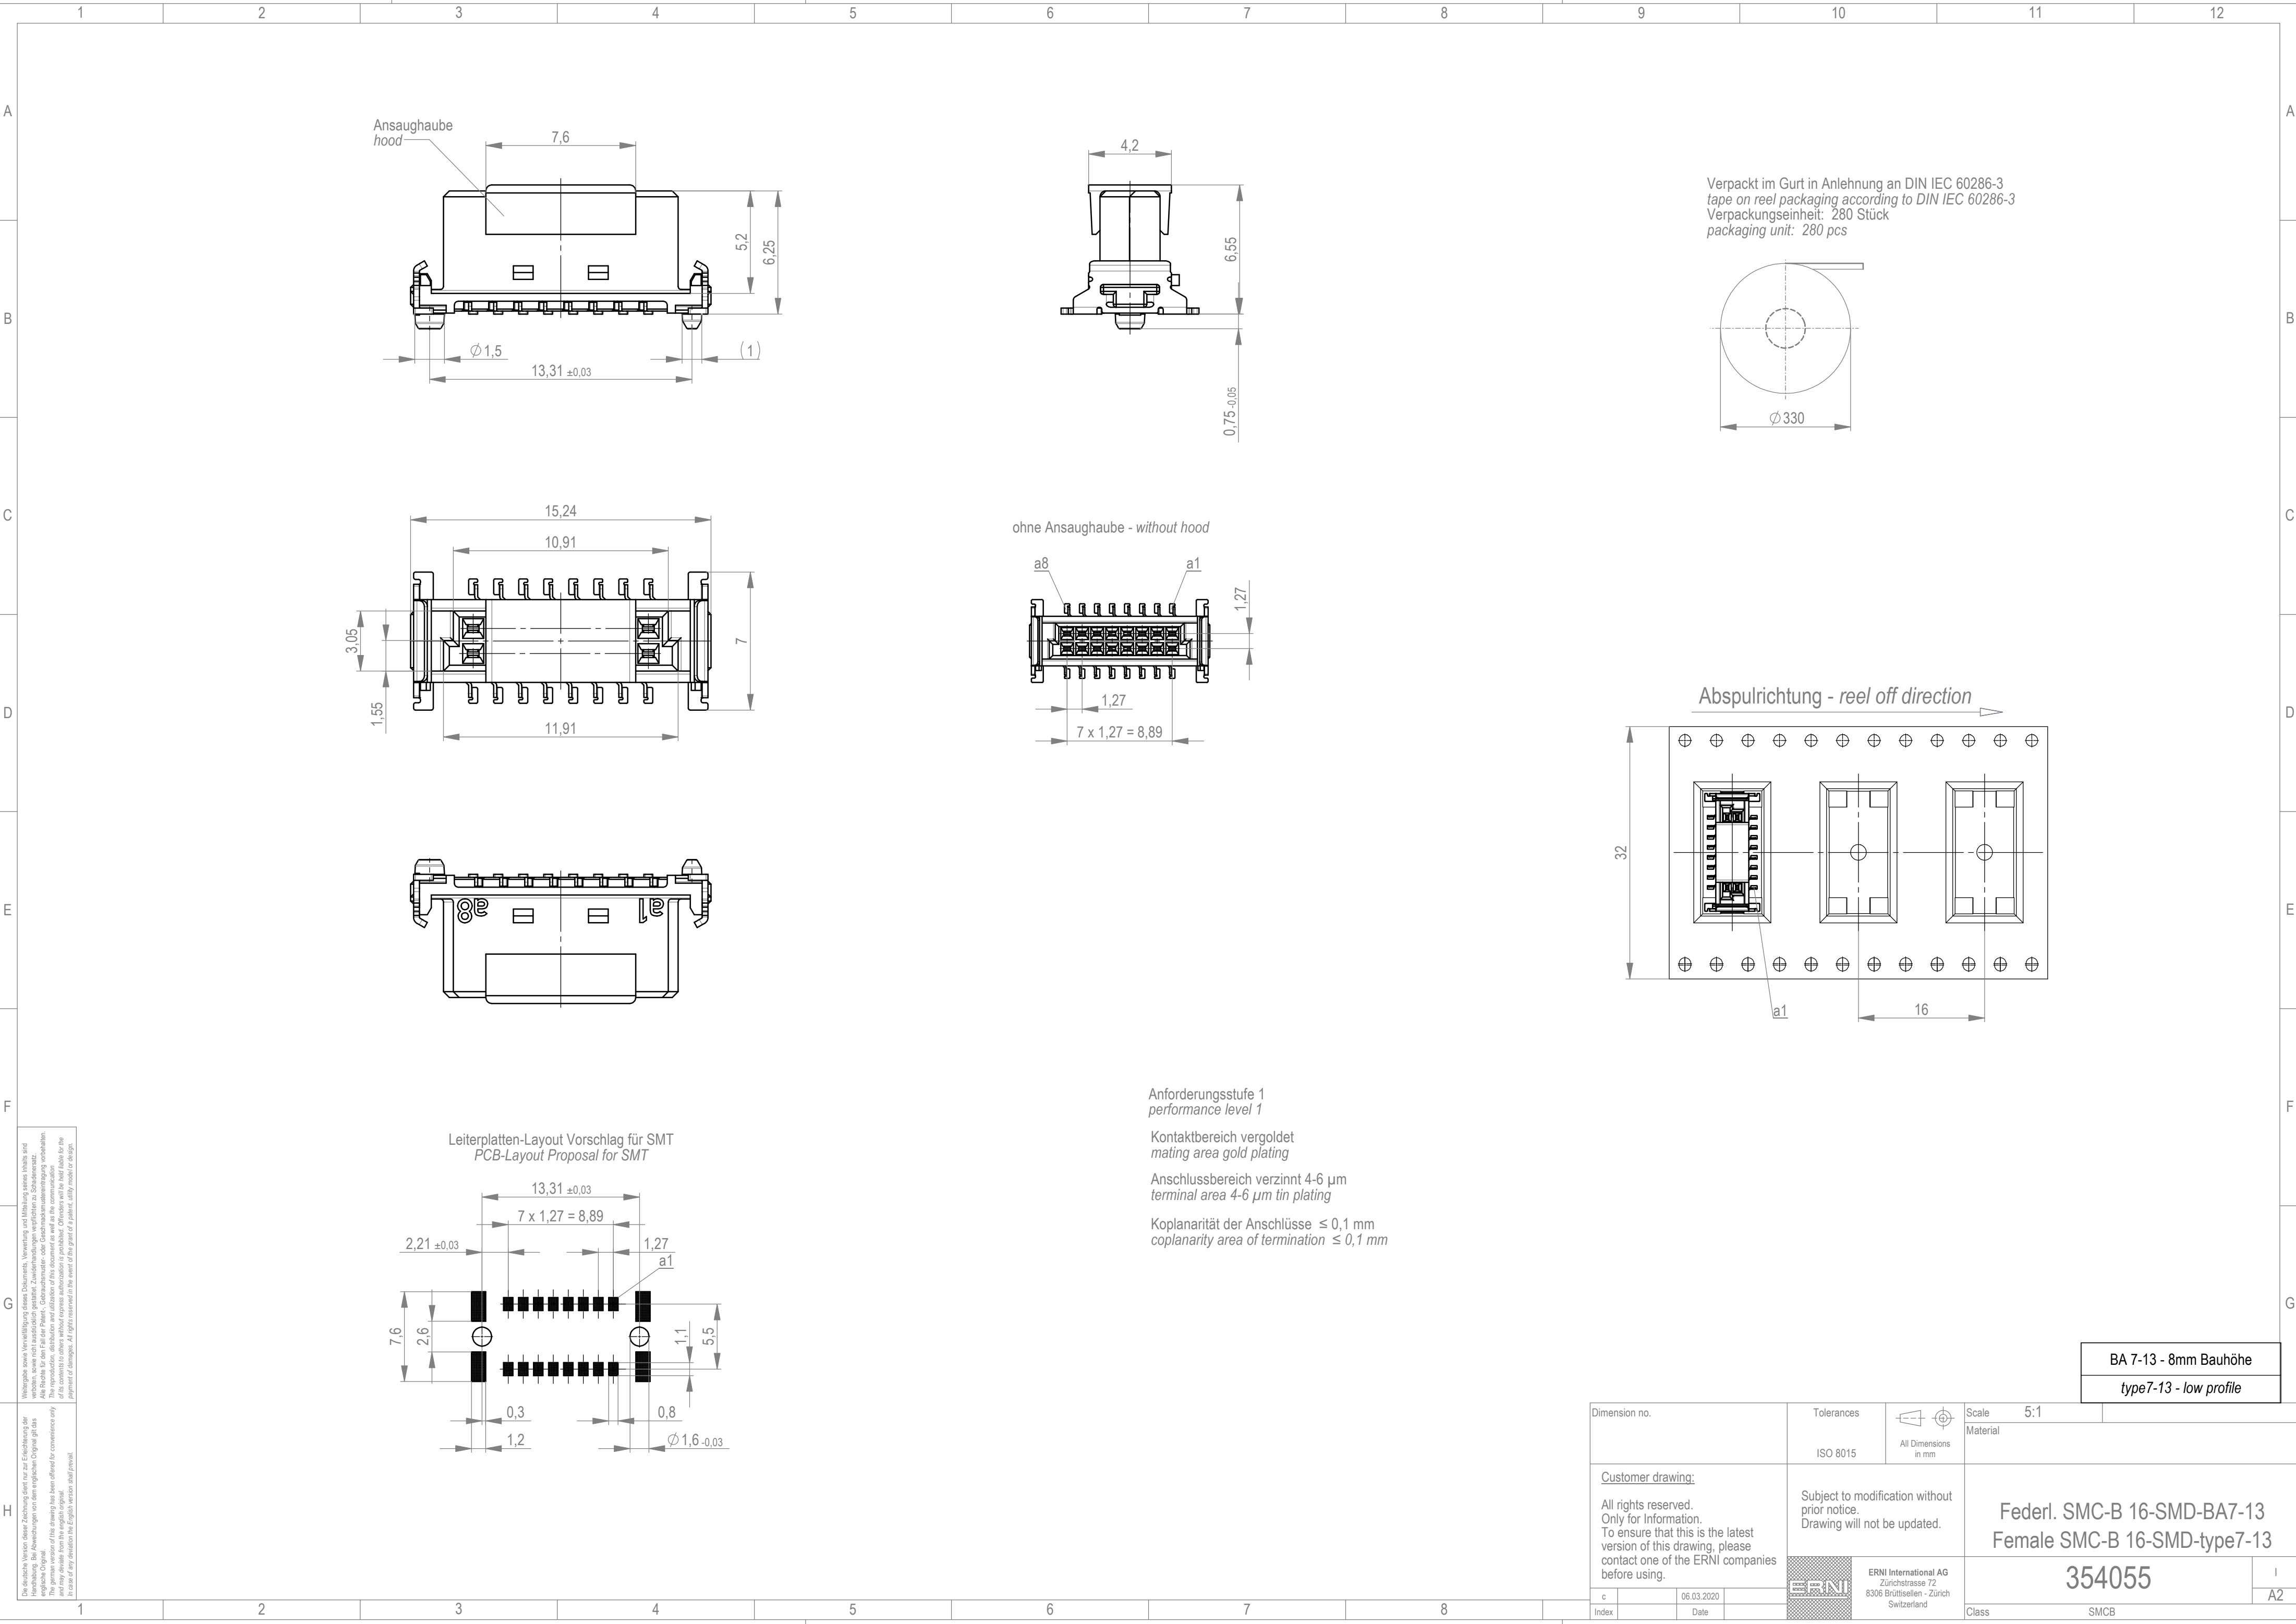

Die deutsche Version dieser Zeichnung dient nur zur Einsichtnahme der Handhabung. Bei Abweichungen von dem englischen Original gilt das englische Original. Any deviations from the original may be made for convenience only. In case of any deviation the English version shall prevail.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Any release to other than the Patent, Gebrauchsmuster- oder Geschäftsgeheimnisverletzung vorbehalten. Of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved for the benefit of the grant of a patent, utility model or design.

Anforderungsstufe 1
performance level 1

Kontaktbereich vergoldet
mating area gold plating

Anschlussbereich verzinnt 4-6 µm
terminal area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 280 Stück
packaging unit: 280 pcs

Abspulrichtung - reel off direction

BA 7-13 - 8mm Bauhöhe
type7-13 - low profile

Dimension no.		Tolerances			Scale 5:1		
		ISO 8015		All Dimensions in mm		Material	
<u>Customer drawing:</u>		Subject to modification without prior notice. Drawing will not be updated.			Federl. SMC-B 16-SMD-BA7-13 Female SMC-B 16-SMD-type7-13		
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.							
c	06.03.2020		ERNI International AG Zürichstrasse 72 8306 Brüttisellen - Zürich Switzerland		354055		I
Index	Date				A2		
					Class	SMCB	