# RAFIX 16 - Toggle switch, square collar

## 1.30.075.001/0104

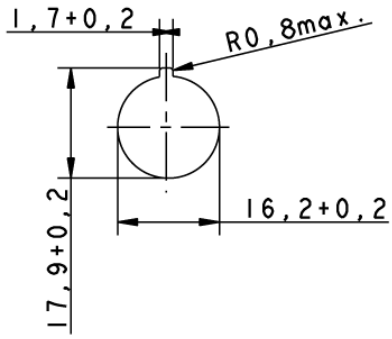
Only use contact blocks with momentary function.

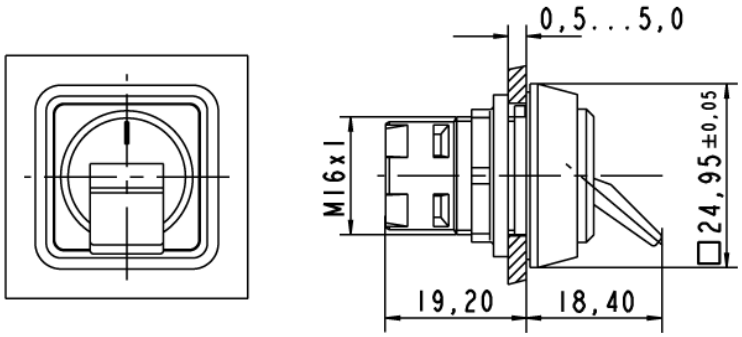


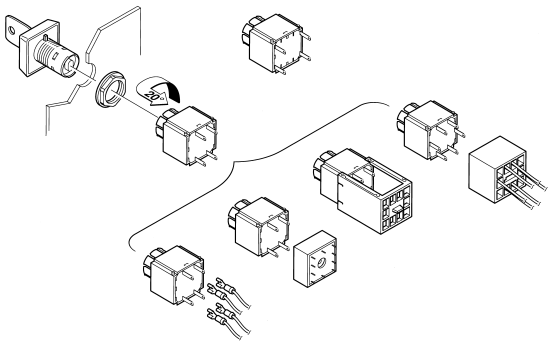
| | |
|---|---|
| **General information** | |
| Form of collar | square |
| **Dimensions** | |
| Collar dimensions | 24.95 x 24.95 mm |
| Collar dimensions | 24.95 x 24.95 mm |
| Overall height | 18.4 mm |
| Mounting depth | 44.7 mm |
| Mounting hole | 16.2 mm |
| Key grid | 25 x 25 mm |
| **Mechanical design** | |
| Mounting | ring nut |
| Contact function | latching |
| Contact arrangement | according to contact block |
| Illumination | no |
| **Mechanical characteristics** | |
| Robustness max. | 100 N |
| **Other specifications** | |
| Degree of protection from front side | IP65 (DIN EN 60529) |
| Operation temperature min. | -25 °C |
| Ambient temp. operating max. without lamp / LED | +70 °C |
| Ambient temp. operating max. with lamp /LED | +55 °C |
| Storage temperature min. | -40 °C |
| Storage temperature max. | +85 °C |
| Environmental restistance | acc. to IEC 60068-2-14, -30, -33 and -78 |
| Operating life (operations) | 300,000 |
| ROHS compliant | yes |
| REACH compliant | yes |

Technical data are approximate and intended solely for general orientation in the selection of a product.
Subject to modifications and errors. Images and other graphics may only be similar.
For more information, refer to www.rafi.de chapter Imprint / Data Protection.

Panel cut-out



Technical data are approximate and intended solely for general orientation in the selection of a product.
Subject to modifications and errors. Images and other graphics may only be similar.
For more information, refer to www.rafi.de chapter Imprint / Data Protection.