

**MATERIAL/FINISH:**

SHELL: SPCC, NICKEL PLATED  
 BRACKET: BRASS, NICKEL PLATED  
 INSULATOR: PBT OR PA9T, UL 94V-0, BLACK,  
 PROCESS TEMP: 230°C for 3 seconds (PBT), 2 CYCLES  
 260°C for 5 seconds (PA9T), 2 CYCLES  
 CONTACT: BRASS, TIN PLATED  
 GOLD PLATED - MATING AREA  
 BRIGHT TIN - TERMINATING AREA  
 BOARDLOCK: COPPER ALLOY, TIN PLATED  
 RIVET: COPPER ALLOY, NICKEL PLATED

**ELECTRICAL:**

RATED CURRENT: 3 AMPS  
 RATED VOLTAGE: 250 VAC (rms) MAX.  
 WITHSTANDING VOLTAGE: 500 VAC (rms) FOR 1 Min.  
 INSULATION RESISTANCE: 1,000 MOhms MIN.  
 CONTACT RESISTANCE: 25 mOhms Max.  
 OPERATING TEMPERATURE: -55° ~ +85° C

TOTAL MATING FORCE: 9.4 Kgf MAX.  
 TOTAL UNMATING FORCE: 1.4 Kgf MIN.

**190-025-2 1 3LYY Y**

SERIES  
 No. of POSITIONS  
 GENDER  
 1 = FEMALE  
 TERMINATION  
 1 = PC MOUNT  
 SHELL PLATING  
 3 = NICKEL  
 INSULATOR MATERIAL  
 L = PBT  
 R = PA9T  
 HARDWARE OPTIONS  
 SEE PAGE 2  
 PLATING OPTIONS  
 7 = GOLD FLASH (MATING AREA)  
 BRIGHT TIN (SOLDER TAILS)  
 9 = 30u" GOLD (MATING AREA)  
 BRIGHT TIN (SOLDER TAILS)

**RoHS COMPLIANT**

UNITS = mm

**DO NOT SCALE FROM DRAWING**



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
**M. SIGMON**  
 DATE:  
 10/25/2016


**NorComp**

SCALE: NTS	SHEET 1	OF 2	REV 4
DWG NO.		190-025-213LYYY	

### HARDWARE OPTIONS


Ø0.120 [Ø3.05]  
HOLE IN FLANGE

00 OPTION





4-40 THREADED HOLE

53 OPTION



4-40 SCREWLOCK  
(0.228 [5.80] x 0.374 [9.50])

56 OPTION

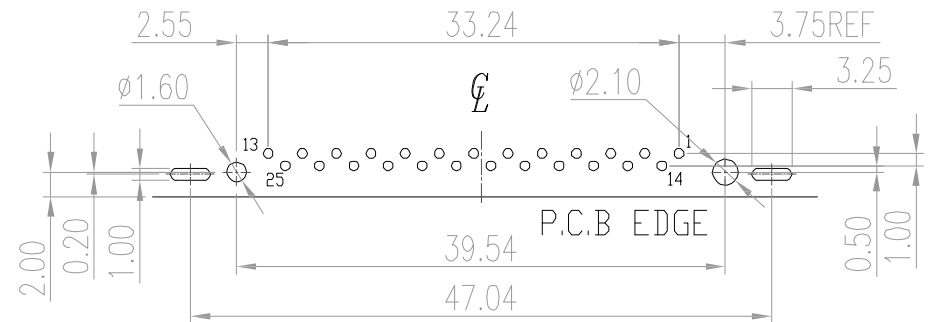

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
**M. SIGMON**

DATE:  
10/25/2016

UNITS = mm

DO NOT SCALE FROM DRAWING

**NorComp**

SCALE:  
NTS

SHEET OF  
2 2

REV  
4

DWG NO.

190-025-213LYYY