

6		5		4		3		2		1	
ITEM	PART#	DESCRIPTION		QTY	UOM			FROM	TO	DESCRIPTION	COLOR
A	5601230200	DuraClik ISL housing 2p		1	PC			A1	--	1X0.35 SQMM PVC BARE CU BK FLRY-A	BLACK
B	5601250200	DURACLIK ISL RETAINER 2P		1	PC			A2	--	1X0.35 SQMM PVC BARE CU BK FLRY-A	BLACK
C	5601240101	DURACLIK ISL crimp receptacle terminal		2	PC						
D	--	PAPER PRINTED PAPER WHITE		1	PC						

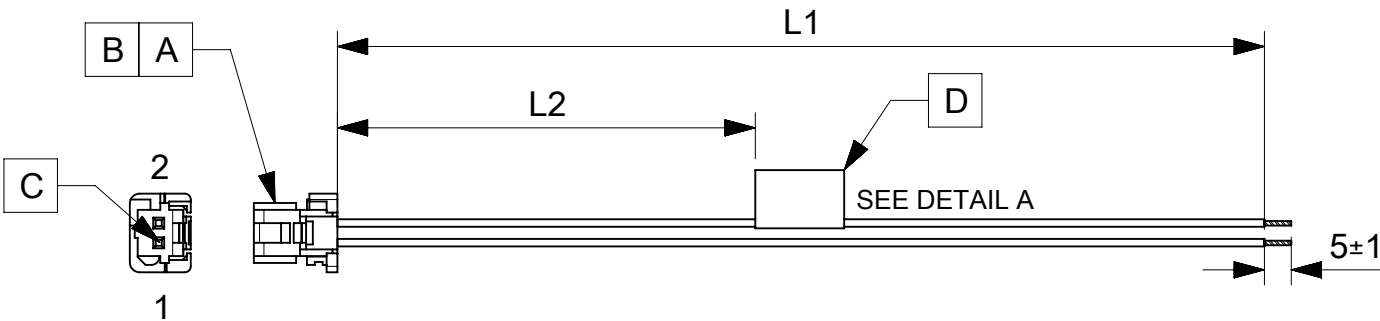


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2183231021	150±8	63	DURA-CLIK ISL R-S 2CKT 150MM DISC Sn
2183231022	300±10	138	DURA-CLIK ISL R-S 2CKT 300MM DISC Sn
2183231023	600±10	288	DURA-CLIK ISL R-S 2CKT 600MM DISC Sn

NOTES

- Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1mm Max.
- Connector view shown is from mating side.
- Label text must be 2mm max. in height with Arial font.
- Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
24/05/2021	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	DIMENSION UNITS	SCALE	CURRENT REV DESC:	
$\frac{F_A}{A} = 0$	mm	NTS		
$\frac{F_C}{C} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)			
$\frac{F_P}{P} = 0$	ANGULAR TOL ± °			
DIVISIONAL SYMBOLS	4 PLACES	±	EC NO: 665457	
	3 PLACES	±	DRWN: ARAJU 2021/05/22	
	2 PLACES	±	CHK'D: RDESAI01 2021/05/28	
	1 PLACE	±	APPR: RDESAI01 2021/05/28	
	0 PLACES	±	INITIAL REVISION:	
			DRWN: ARAJU 2021/05/22	
			APPR: RDESAI01 2021/05/28	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES
			A4-SIZE	218323
			MATERIAL NUMBER	CUSTOMER
			SEE TABLE	GENERAL MARKET
			SHEET NUMBER	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2021/05/28	13:17:29
-----------------	----	--------------	------------	----------