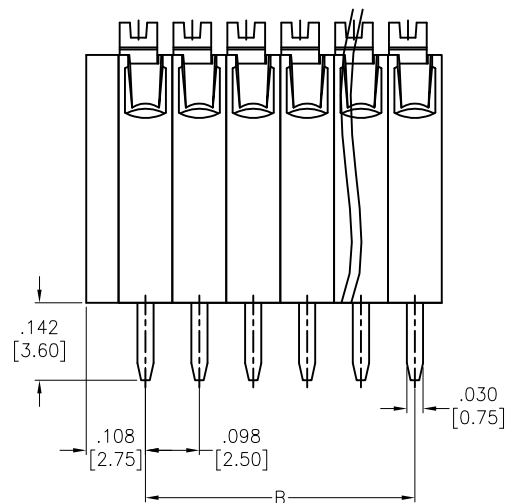
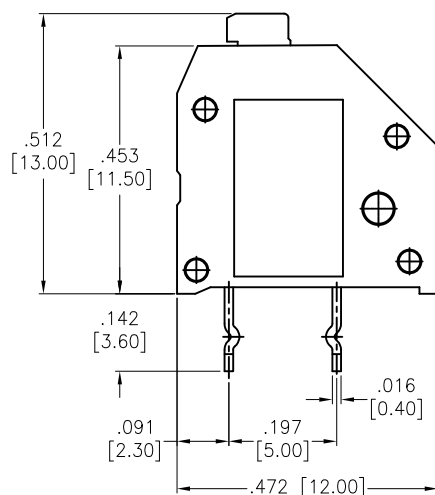
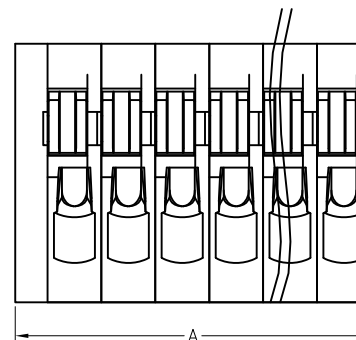
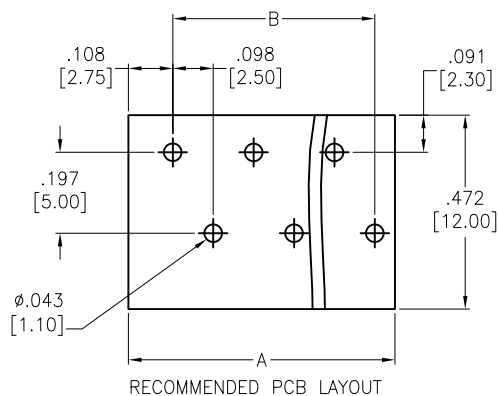


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/6/16	
A		UPDATE DRAWING	8/31/20	AY/KC

**SPECIFICATIONS:**

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Grey

Contact: Copper Alloy, Tin plated

Electrical:

Voltage rating: 300V

Current rating: 4A

Dielectric withstanding voltage: 1600V for 1 minute

Mechanical:

Wire range: 28~20 AWG

Strip length: 8.5~9.5 mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 01 thru 30

A= .098 [2.50] x No. of Positions + .059 [1.50]

B= .098 [2.50] x No. of Space

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	7/6/16
CHECKED	YC	7/6/16
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
EURO BLOCK, .098 [2.50] PITCH, WITH END COVER DOUBLE ROW CENTER CONTACT LINK			
SIZE	PART NO.	REV.	
X	EB59A-XX-V	A	
REF:	S00067C	SCALE:	NTS
SHEET 1 OF 1			