

2017.06.1
2 10:14:14
+08'00'

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/12/15	
A		UPDATED DRAWING	6/12/17	HR/AC

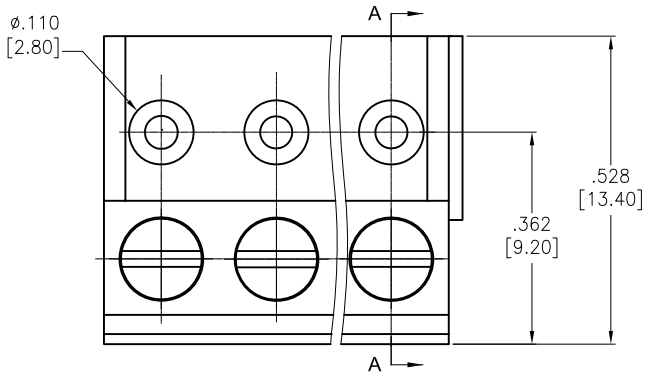

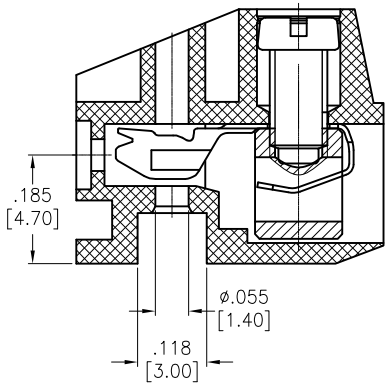

SECTION A–A

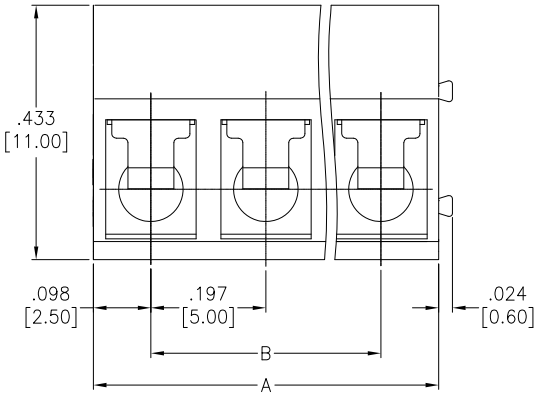

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V–0
Insulator color: Black
Clamp: Phosphor Bronze, Nickel plated
Cage: Brass, Nickel plated
Screw: M2.5 Steel, Zinc plated
Electrical:
Voltage rated: 300 V
Current rated: 10 A
Contact resistance: 20 mΩ
Insulation resistance: 500 MΩ @ 500 VDC
Wire range: 28–16AWG, 1.5mm²
Withstanding valtage: 2000V AC/1 Min
Torque: 0.4N–m, 3.6 Lb–In
Strip length: 4.5–5mm
Temperature Rating:
Operating temperature: –30°C to +120°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 2 thru 24
A = .197 [5.00] x No. of Positions
B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	3/12/15
CHECKED	YC	3/12/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .197 [5.00] PITCH

SIZE	PART NO.	REV.
X	EBJA-XX-C-BK	A

REF: S00067C | SCALE: NTS | SHEET 1 OF 1