


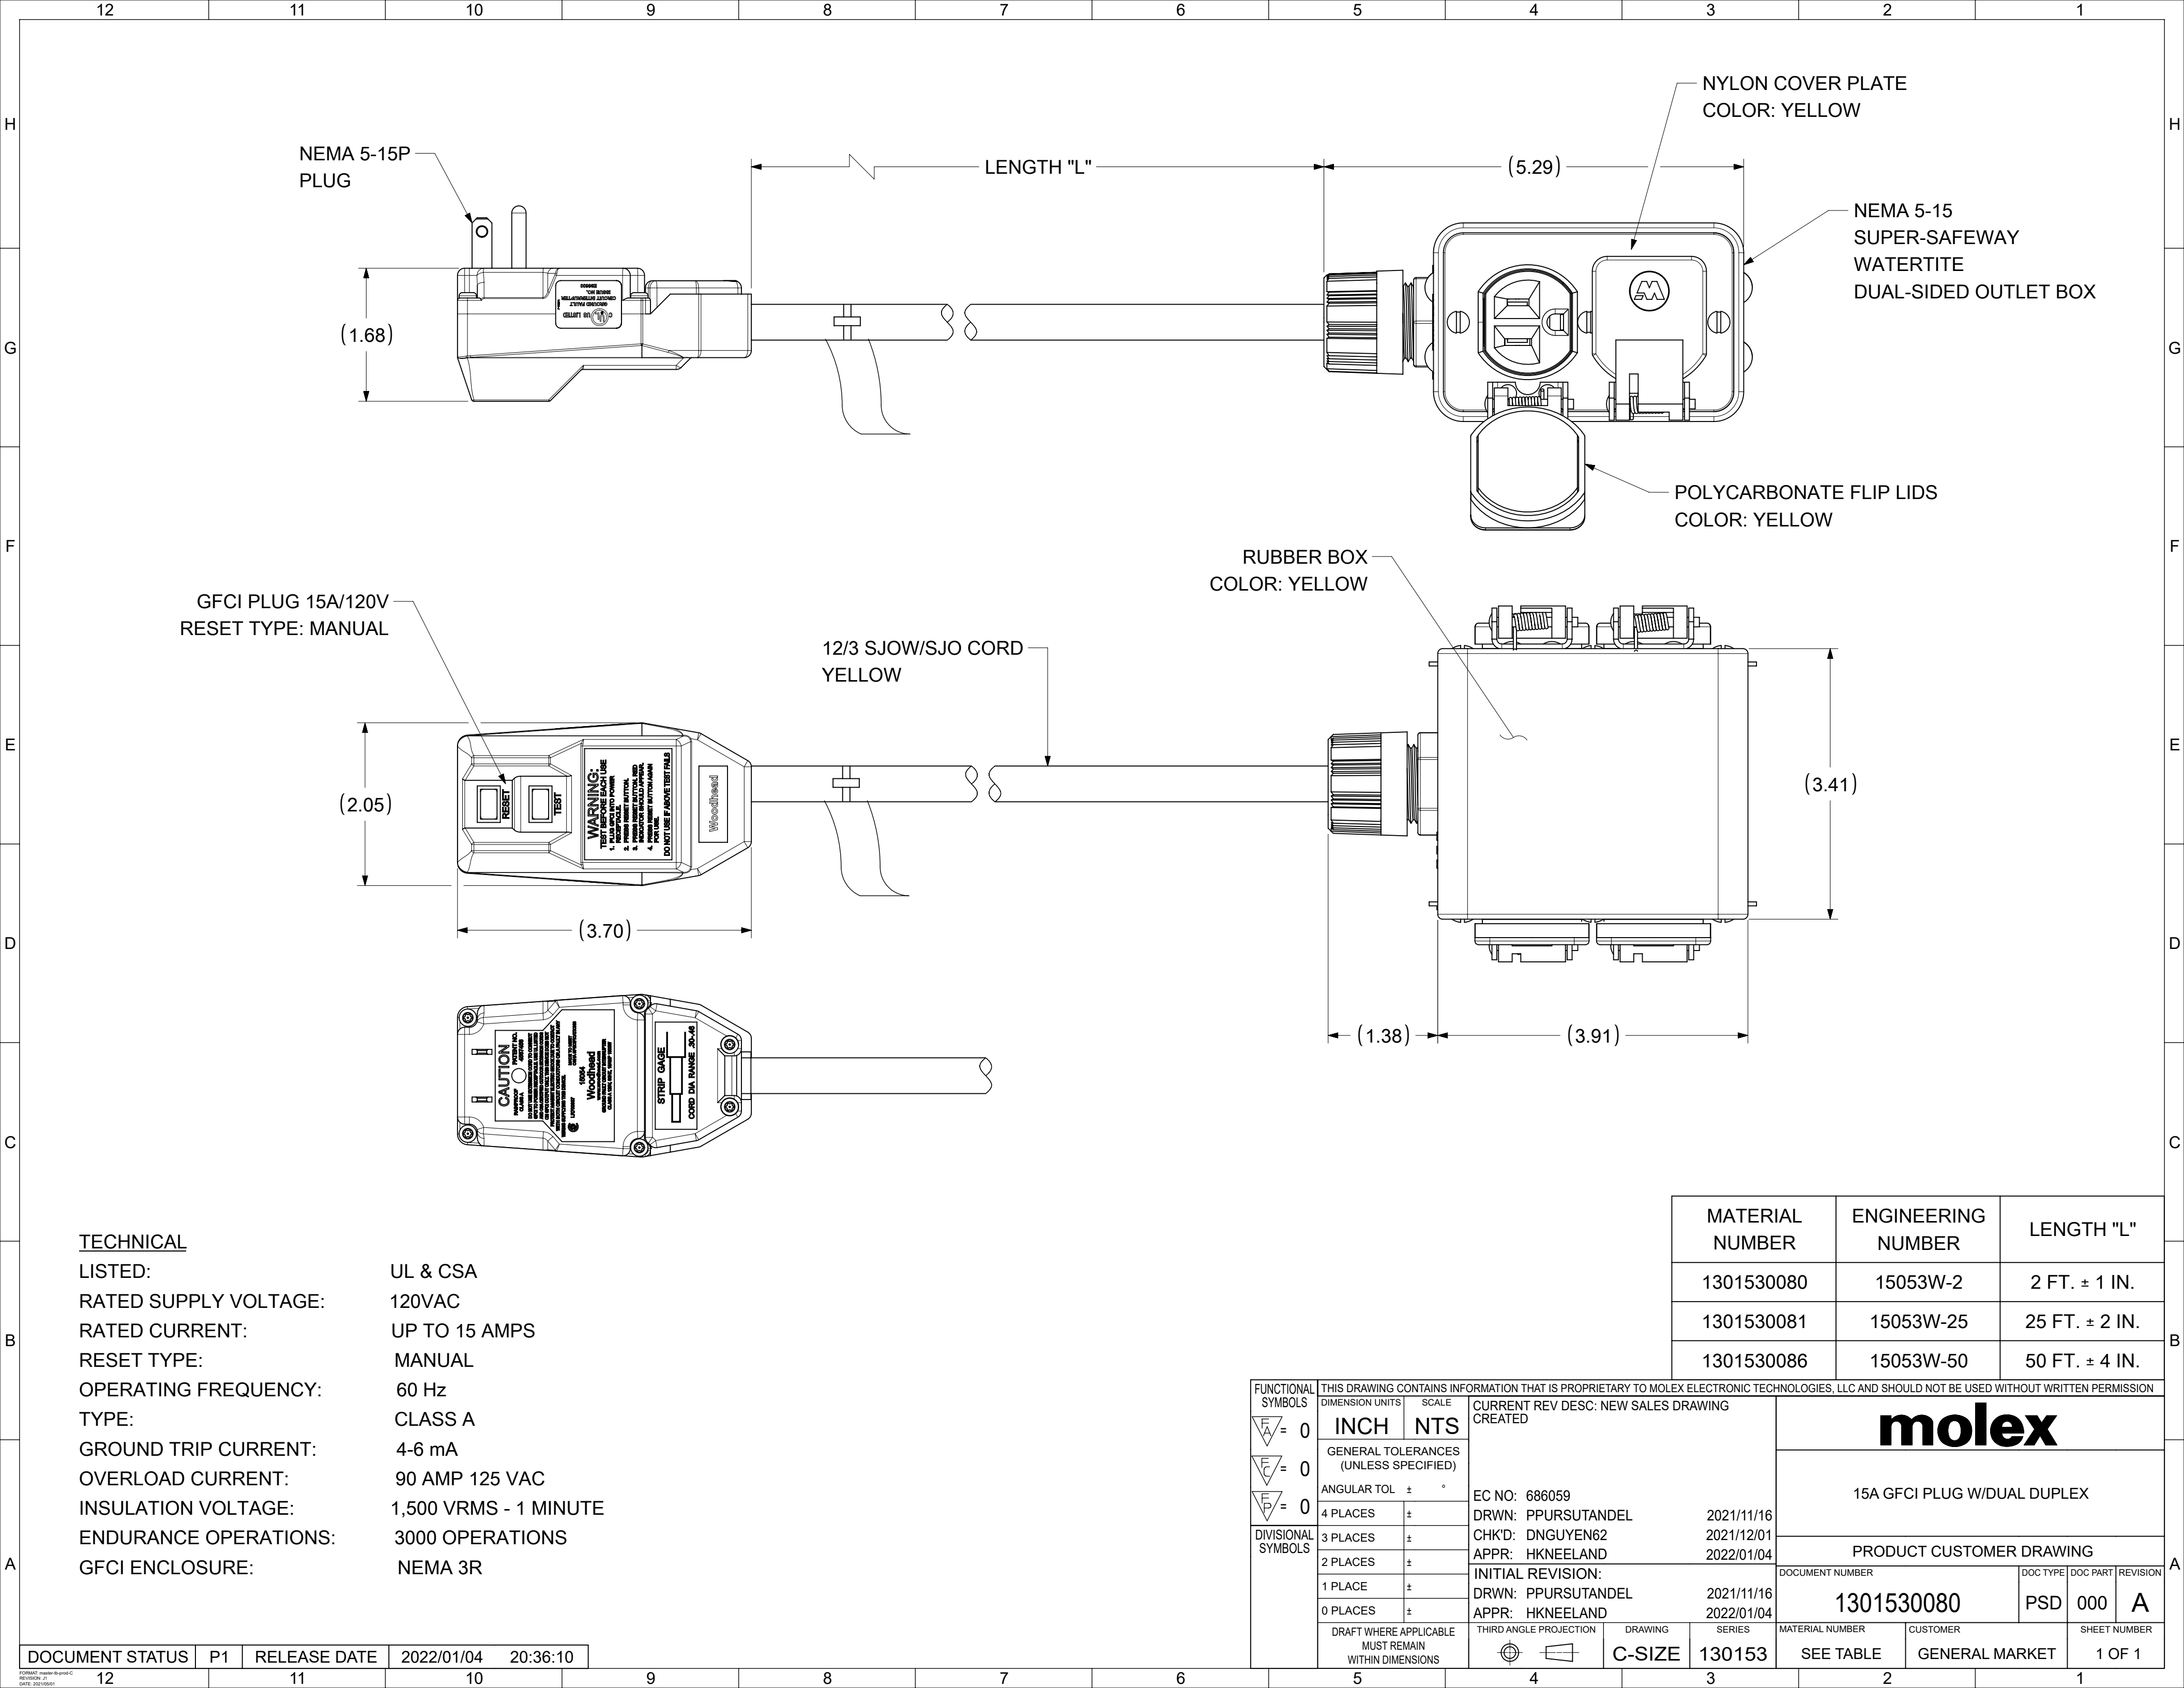

TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 15 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	90 AMP 125 VAC
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
GFCI ENCLOSURE:	NEMA 3R

MATERIAL NUMBER	ENGINEERING NUMBER	LENGTH "L"
1301530080	15053W-2	2 FT. ± 1 IN.
1301530081	15053W-25	25 FT. ± 2 IN.
1301530086	15053W-50	50 FT. ± 4 IN.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: NEW SALES DRAWING CREATED				molex			
	DIMENSION UNITS	SCALE					15A GFCI PLUG W/DUAL DUPLEX			
$\frac{F}{A} = 0$	INCH	NTS								
$\frac{F}{C} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)									
$\frac{F}{D} = 0$	ANGULAR TOL ± °									
DIVISIONAL SYMBOLS	4 PLACES	±	EC NO: 686059							
	3 PLACES	±	DRWN: PPURSUTANDEL 2021/11/16							
	2 PLACES	±	CHK'D: DNGUYEN62 2021/12/01							
	1 PLACE	±	APPR: HKNEELAND 2022/01/04							
	0 PLACES	±	INITIAL REVISION: DRWN: PPURSUTANDEL 2021/11/16 APPR: HKNEELAND 2022/01/04							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
			C-SIZE	130153	SEE TABLE	GENERAL MARKET	1301530080	PSD	000	A