




APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/3/14	

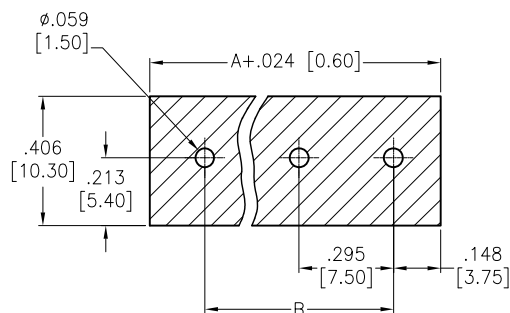

RECOMMENDED PCB LAYOUT

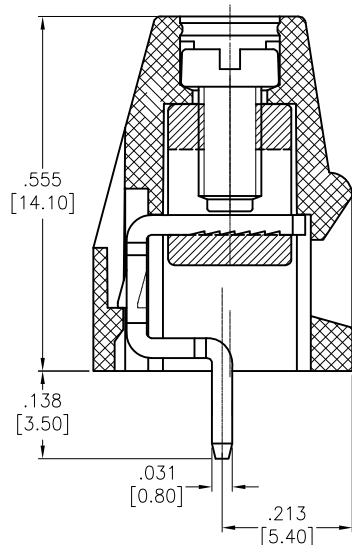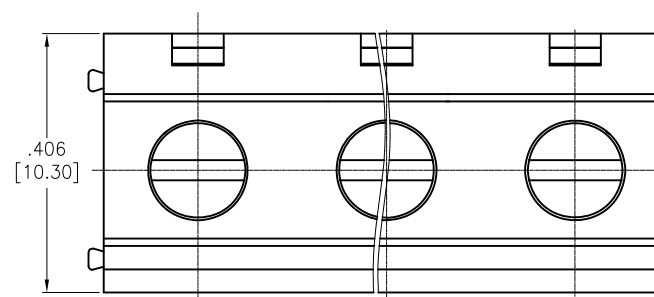

SECTION A-A

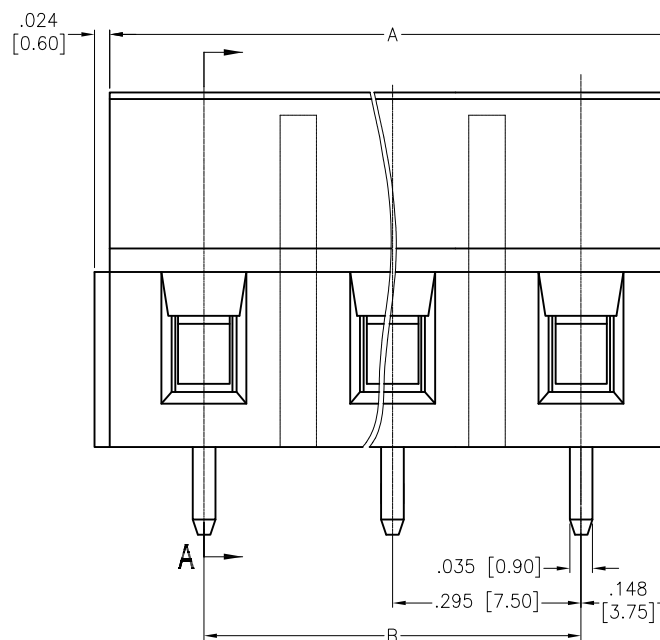

Positions: 02 thru 24

A = .197" [7.50] x No. of positions

B = .197" [7.50] x No. of spaces

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator Color: Green

Contact: Brass, Tin plated.

Screw: Steel, M2.5, Zn plated.

Cage: Brass, Ni plated

Electrical:

Voltage rating: 300 V

Current rating: 10 A

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire Range: 12~22 AWG, 2.5mm²

Wire strip length: 6~7mm

Torque: 0.4Nm, 3.6Lb-in

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS

DATE

DRAWN

AY

9/3/14

CHECKED

MW

9/3/14

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MODULAR EURO BLOCK, VERTICAL,
.197" [7.50] PITCH, COLOR GREEN

SIZE

X

PART NO.

EBAG-XX-M

REV.

-

REF: S00067C

SCALE: NTS

SHEET 1 OF 1