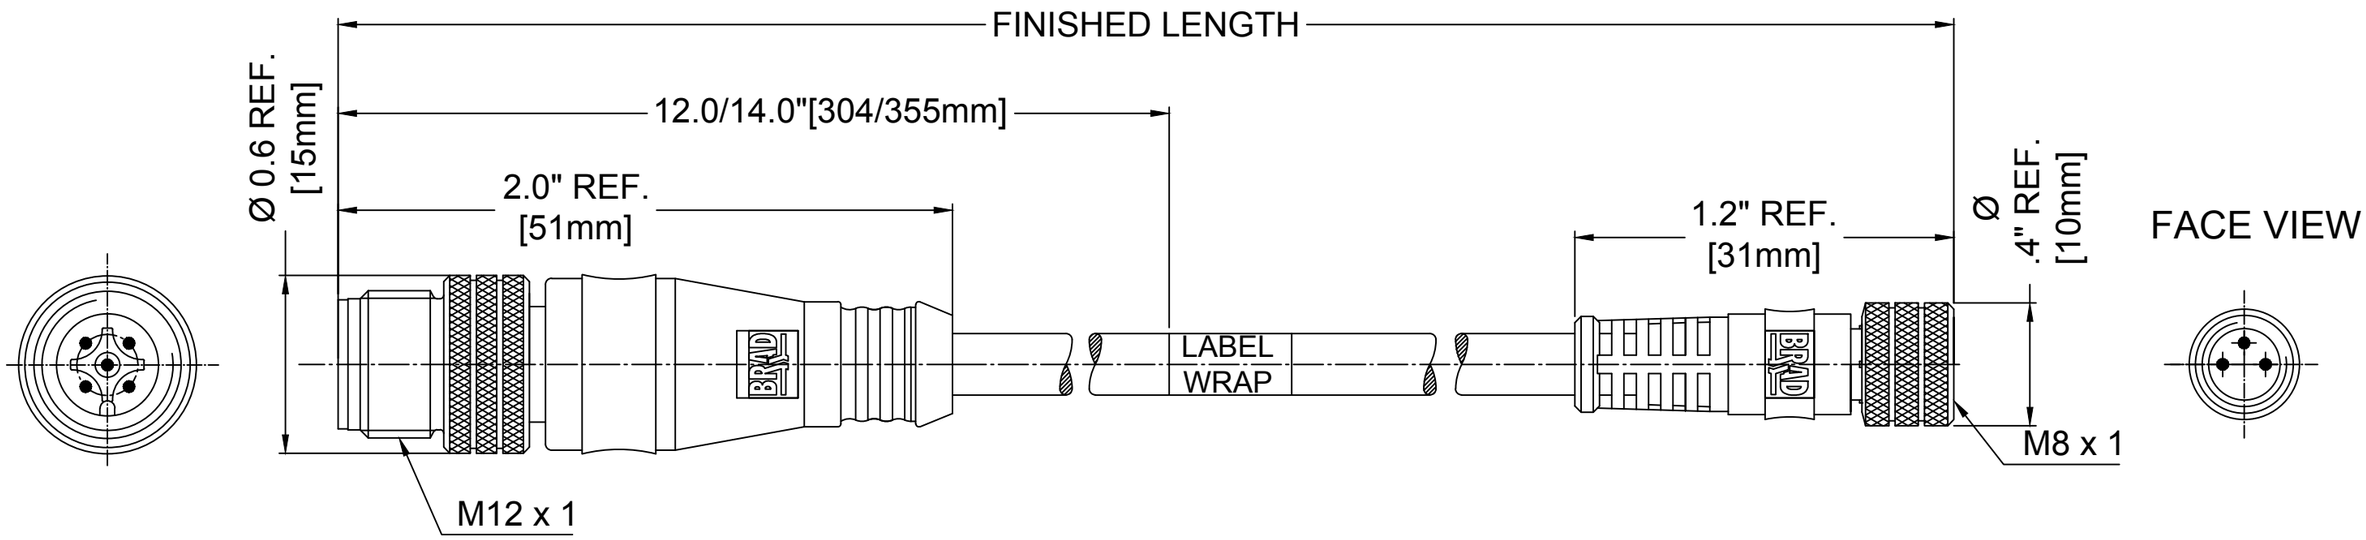






MALE FACE VIEW	
3-POLE	4-POLE
	
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK

FEMALE FACE VIEW	
3-POLE	4-POLE
	
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK

483030A10M006

- No Pole / 3-4 Pole
- cable type: #24/3-4 AWG PVC YELLOW
- cable length: 006----.6 Meters; 020----2 Meters

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGHT IN/MM
1200870306	483030A10M006	1.97' +1.75" -0 [0.6M +44.5 -0]
1200870309	483030A10M010	3.28' +2.19" -0 [1.0M +55.6 -0]
1200870312	483030A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200870353	484030A10M010	3.28' +2.19" -0 [1.0M +55.6 -0]
1200870354	484030A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]

SPECIFICATION DATA

COMPONENT	MATERIAL	FINISH
LABEL	MYLAR	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
CONTACT	COPPER ALLOY	Au OVER Ni
INSERT	PUR	BLACK
O-RING	VITON	RED
OVERMOLD	TPE	YELLOW
CABLE #24/3-4	PVC	YELLOW
VOLTAGE RATING:		3-4 POL:60V/AC 75V/DCV
AMPERAGE RATING:		3A
PROTECTION CLASS:		IP 68
OPERATING TEMPERATURE:		-20°C / 105°C
UL CERTIFICATIONS		UL listed, File #E152210
CSA CERTIFICATIONS		CSA CERTIFIED, File LR6837

UPDATED FOR PART NUMBER MATRIX
EC NO:IPG2014-0989 11/27/13
DRWN: GGUSTAFS ----
CH'KD: BARDEN
APPR: BWOODMAN 2010/02/05
DESCRIPTION
2
REV

QUALITY SYMBOLS
▼ = 0
Ⓒ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±.13	±.010
1 PLACE	±.25	±.020
ANGULAR ± .5 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	IN/MM
SCALE	NTS
DESIGN UNITS	INCH
	THIRD ANGLE PROJECTION
DRAWN BY / DATE	REISSNER 2010/02/02
CHECKED BY / DATE	FP 2010/02/05
APPROVED BY / DATE	FPACHER 2010/02/05

NC/MIC 3/4P F/MM XM
AWG 24 PVC

MOLEX INCORPORATED

MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE TABLE	SD-120087-009	1 OF 1

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION