COMUS Group

Part Number: PSB 130/30 (Alternate Part No: S1515)
Proximity Switch - Reed Switch based
Rectangular - Normally Closed Contacts - Suggested Magnet: PSM (Black)

PICTURE



✔RoHS Compliant

APPLICATIONS INCLUDE


- Position and limit sensing
- Linear actuators
- Security system switch
- Door Switch

OPTIONS

- Color: Standard = Blue housing / Black wire.
  Also available Blue housing / Grey wire.
- Cable entry: Standard = Right hand entry. Also available Left hand entry.
- Custom cable lengths, strip lengths, cable types, terminations.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !
- Device is intended to be mounted in an enclosure under UL recognition.

DIMENSIONS

Drawings not to scale.
All dimensions in inches (mm) nominal.

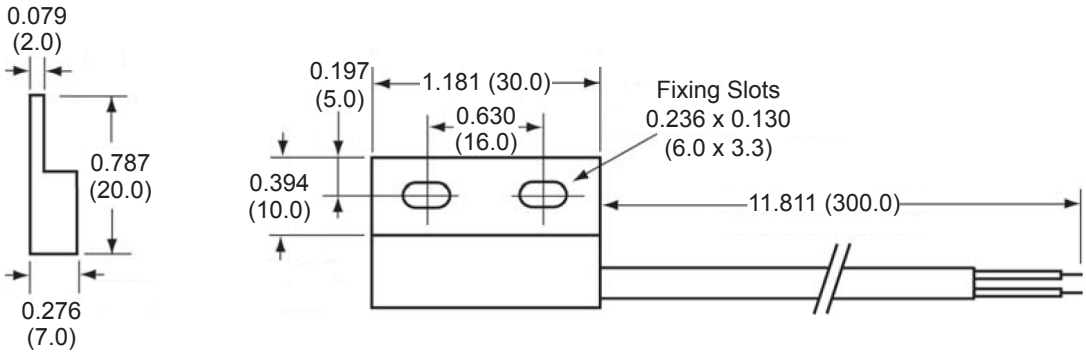

SPECIFICATION

Contact Form / Style	Normally Closed
Switching Capacity (Resistive)	5 W/VA
Switching Voltage	100 VAC
Switching Current	0.5 A
Switching Distance	8 mm Min
Operating Temperature Range - Continuous	-20°C +85°C
Operating Temperature Range - Intermittent	-25°C +85°C
Storage Temperature Range	-25°C +90°C
Case Material	Nylon 66
Cable	2 x Round 0.14mm^2 PVC Covered and Insulated

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900 **www.comus-intl.com** **Fax: (1) 973 777 8405**

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemtech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 43219090

©2015 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA