

PART NO.	A22028-001	REV	ECO	DATE	APP
		D	98556	05-18-12	TLM

LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138.

COPPER ALLOY PER MIL-DTL-83513. GOLD PLATE PER ASTM B488,
(HARD GOLD) TYPE II CODE C, CLASS 1.27.

COPPER ALLOY PER MIL-DTL-83513 GOLD PLATED PER ASTM B488,
(HARD GOLD) TYPE II CODE C CLASS 1.27.

BERYLLIUM COPPER PER ASTM B194 NICKEL PLATE PER AMS-C-26074.


3 AMP MAX.

26 MILLIOHMS (65mV) MAX @ 2.5 AMPS.

PRODUCT FAMILY TESTED TO AND PASSED THE PERFORMANCE SPECIFICATIONS OF TABLE VII OF MIL-DTL-83513.



ACTUAL SIZE

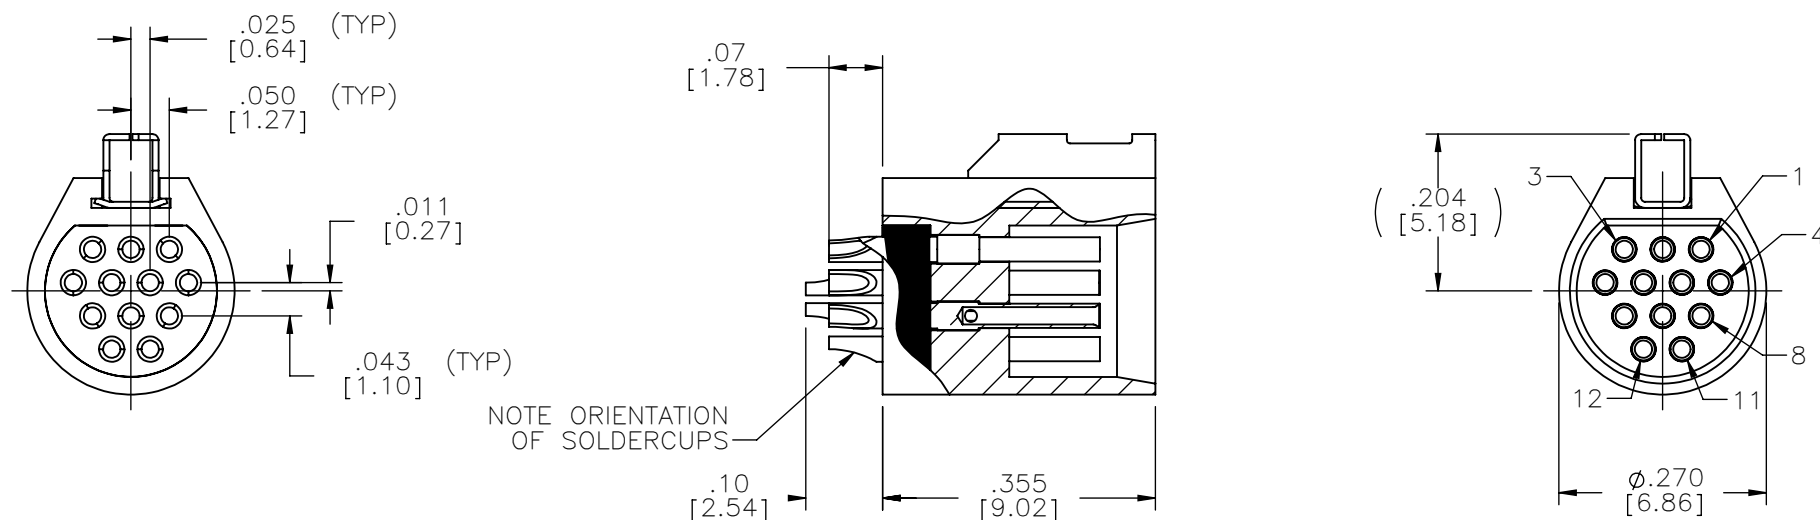

RoHS

MCS	THIRD ANGLE		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.			OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	—TOLERANCES—		DFTM. TEP	DATE	TITLE:		DWG NO.	REV D
	UNLESS OTHERWISE NOTED			10-24-07	(12) SOCKET FEMALE		A22028-001	
	DIMENSIONS IN INCHES		CHK'D.	DATE	MICRO CIRCULAR		SHEET 1 OF 1	
SLDW	2 PL DEC ± .01 3 PL DEC ± .005 4 PL DEC ± .0005 ANGLES ± 1°		APP'D.	DATE	CONNECTOR W/ LATCH	SCALE: 4:1		