


<b>PART NAME</b>	NON-METALLIC ENCLOSURE (STYLE D)	<b>PART No.</b>	NBD-10456 & NBD-10476 & NBD-15456
------------------	----------------------------------	-----------------	-----------------------------------

<p><b>MATERIAL:</b></p> <p><u>INDOOR VERSION</u>          SOLID BODY &amp; COVER _____ ABS/PC BLENDED PLASTIC          UL94-5VB FLAMMABILITY RATING</p> <p>CLEAR COVER _____ POLYCARBONATE PLASTIC          UL94V-0 FLAMMABILITY RATING          UV STABILIZED</p> <p><u>OUTDOOR VERSION</u>          SOLID BODY &amp; COVER _____ PBT/PC BLENDED PLASTIC          UL94-5VA FLAMMABILITY RATING          UV STABILIZED</p>	<p><b>FINISH:</b></p> <p>BODY _____ LIGHT GRAY          COVER _____ LIGHT GRAY OR CLEAR</p>	<p>COVER INCLUDES GRAY POLY-URETHANE GASKET.</p> <p>AIR AND MOISTURE VENTS, STAINLESS STEEL LOCKING HASP, PANEL MOUNTING RAILS, GALVANIZED STEEL INNER PANEL AND STAINLESS STEEL WALL MOUNTING BRACKETS ARE NOT INCLUDED, BUT CAN BE PURCHASED SEPARATELY.</p>	<p><b>INDUSTRY STANDARDS:</b></p> <p><u>INDOOR VERSION</u>          UL508 TYPE 1, 2, 4, 4X INDOOR, 12 &amp; 13          NEMA TYPE 1, 2, 4, 4X, 12 &amp; 13          IEC529-IP65</p> <p><u>OUTDOOR VERSION</u>          UL508 TYPE 1, 2, 4, 4X, 12 &amp; 13          NEMA TYPE 1, 2, 4, 4X, 12 &amp; 13          IEC529-IP65</p>
--	---	--	---

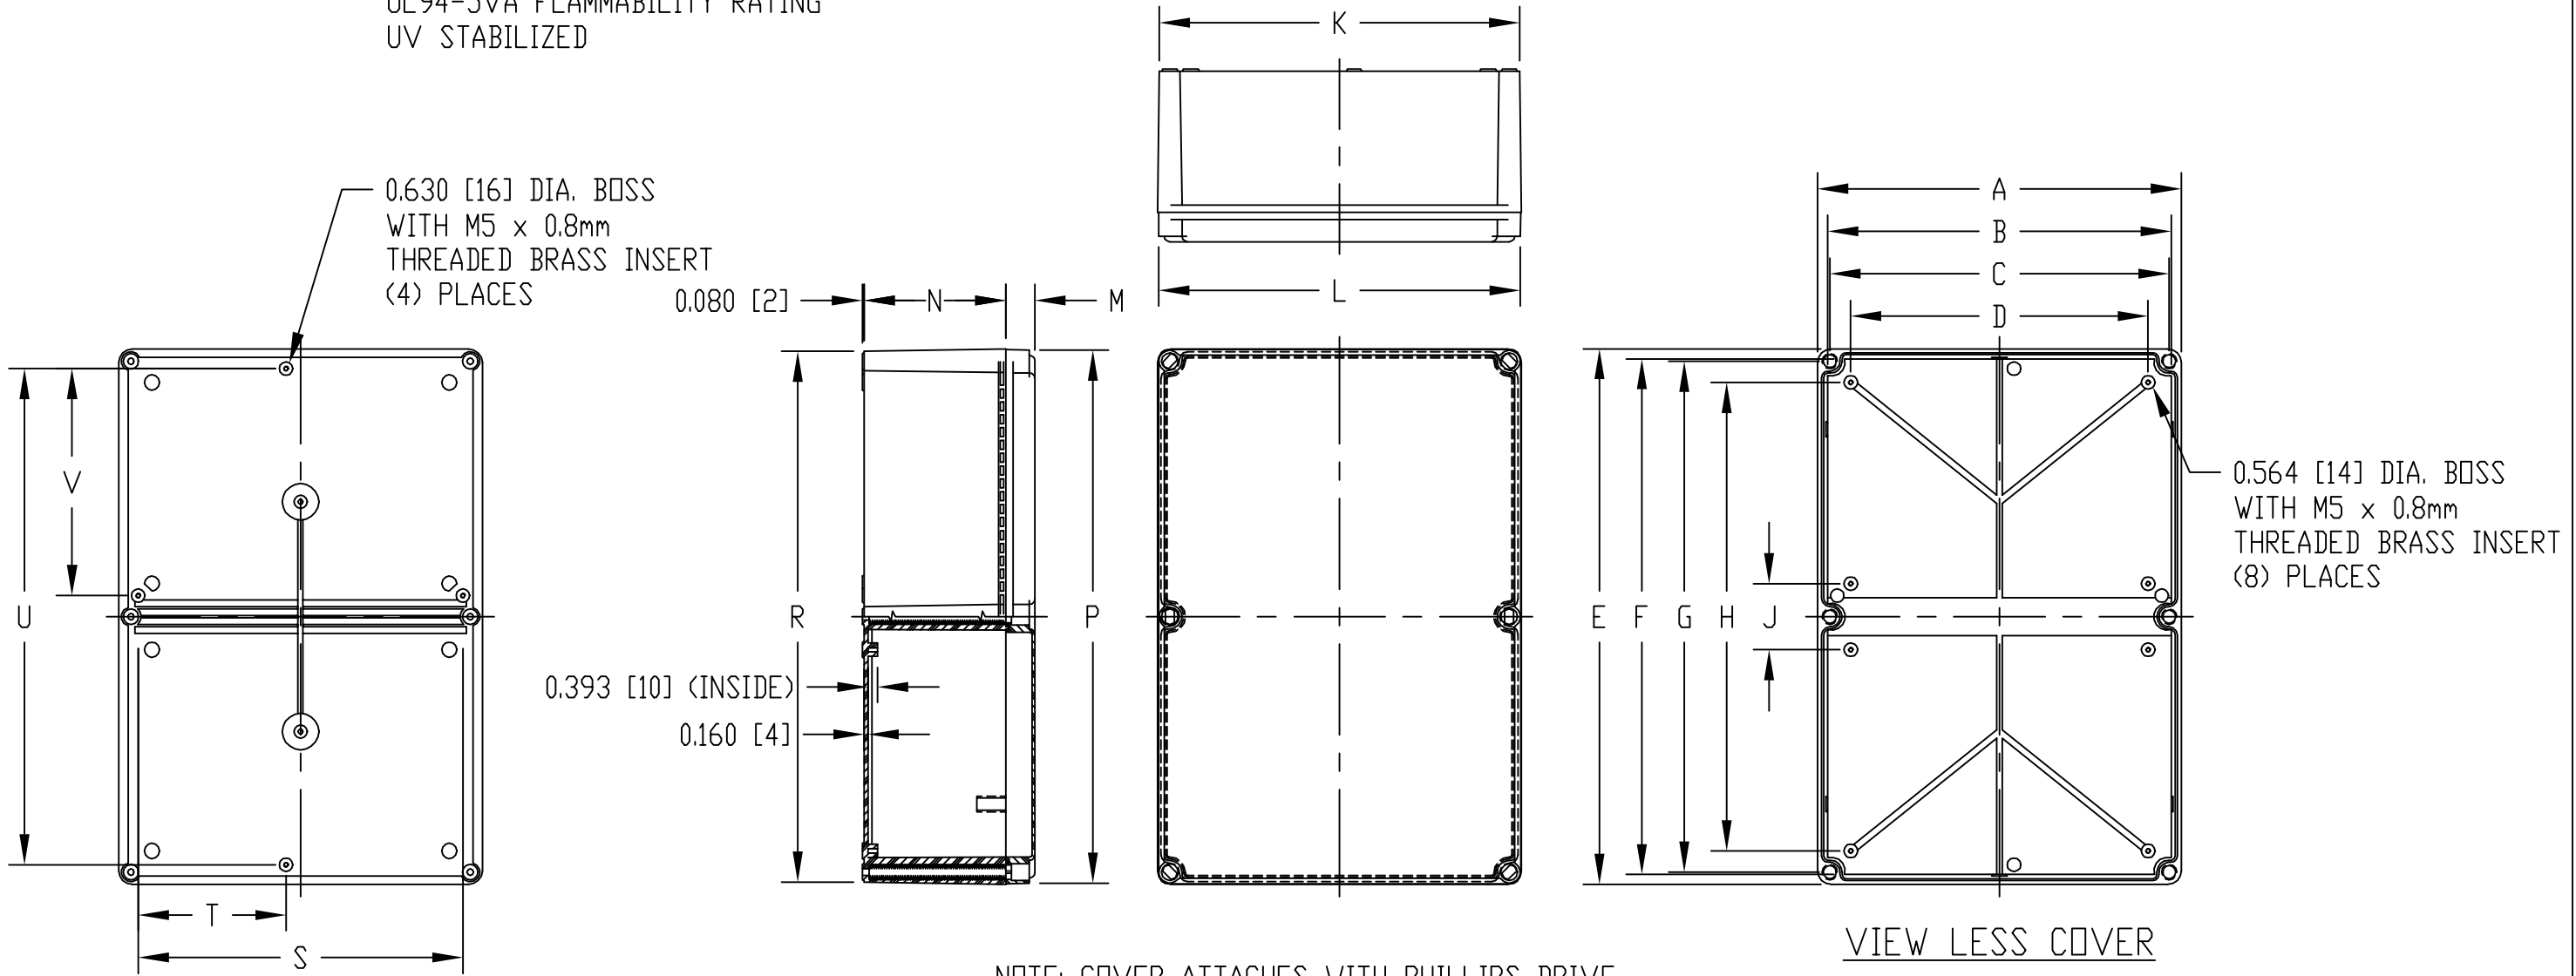

NOTE: COVER ATTACHES WITH PHILLIPS DRIVE NON-METALLIC SCREWS. (NOT SHOWN)

NOTE: ALL DIMENSIONS HAVE ±0.039 [±1] TOLERANCE UNLESS OTHERWISE SPECIFIED

DIMENSIONS = INCHES [MILLIMETERS]

INDOOR VERSION		OUTDOOR VERSION	DIMENSIONS																		
PART NO.		PART NO.	DIMENSIONS																		
SOLID COVER	CLEAR COVER	SOLID COVER	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V
NBD-10456	NBD-10476	NBD-15456	14.975	14.170	13.984	12.252	22.085	21.260	21.062	19.313	2.724	14.838	14.890	1.210	5.825	21.958	21.870	13.378	6.093	20.455	9.360
			[380]	[360]	[355]	[311]	[561]	[540]	[535]	[491]	[69]	[377]	[378]	[31]	[148]	[558]	[555]	[340]	[155]	[520]	[238]