



10 9 8 7 6 5 4 3 2 1




トレードマーク
TRADE MARK.

回路番号
CKT No.

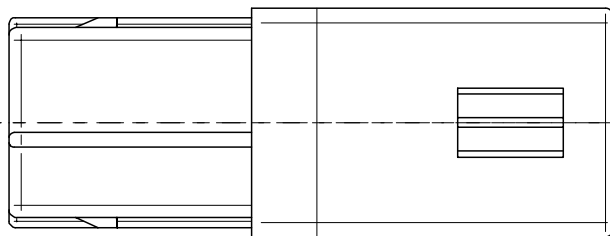

24.5

10.45

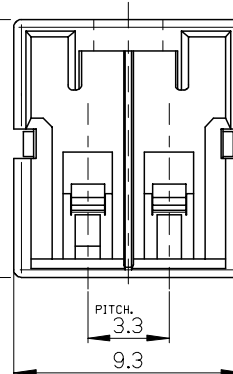

PITCH
3.3
9.3


注記
NOTES.

△ 適合リテーナ : 51348-0213
APPLICABLE RETAINER
詳細は SD-51348-001 を参照下さい。
REFERENCE:SD-51348-001

2. 材料 : NYLON66,UL94V-0
MATERIAL


本形状は 501329-0200 を示す。
SHAPE OF 501329-0200

ターミナル装着・嵌合状態
TERMINAL ASSEMBLY & MATING CONDITION

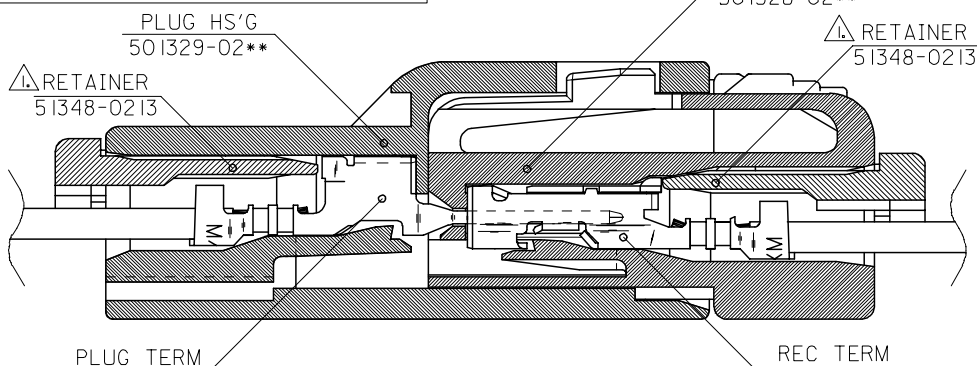


嵌合キー違い品
KEYING TYPE.

501328-0214
COLOR:BLUE



501328-0222
COLOR:RED



BLUE	501329-0214	501329-02**
RED	501329-0222	
WHITE	501329-0200	
COLOR	MATERIAL No.	MODEL No.

RELEASED EC NO: J2005-2177 DRWN: T00A CHKD: K.ASAKAWA APPR: S.ICHIKAWA A	2005/03/31 2005/03/31 2005/03/31 REV	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			10 UNDER	±0.2	DRAWN BY T.ODA	DATE '04/09/30	TITLE 3.3 W/W INERTIA LOCK CONN PLUG 2CKT			
			10 OVER 30 UNDER	±0.25	CHECKED BY K.ASAKAWA	DATE '04/09/30				
			30 OVER	±0.3	APPROVED BY S.ICHIKAWA	DATE '04/09/30	 MOLEX INCORPORATED			
			ANGULAR ±3 °		MATERIAL NO.					DOCUMENT NO.
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A 3 SEE CHART		SD-501329-001			1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										