




PART NUMBER	ENGINEERING NO.	LENGTH
1300080489	301001A04M050	5M +150 -0 (16'5" +6.00 -0")
1300080112	301001A04M100	10M +300 -0 (32'-0" +12.0" -0")

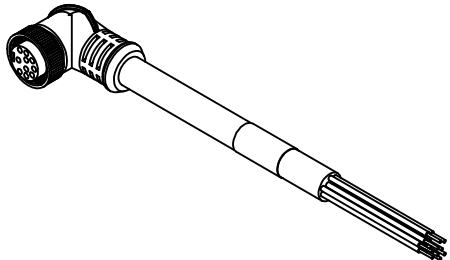

Partial2
Scale 1:1

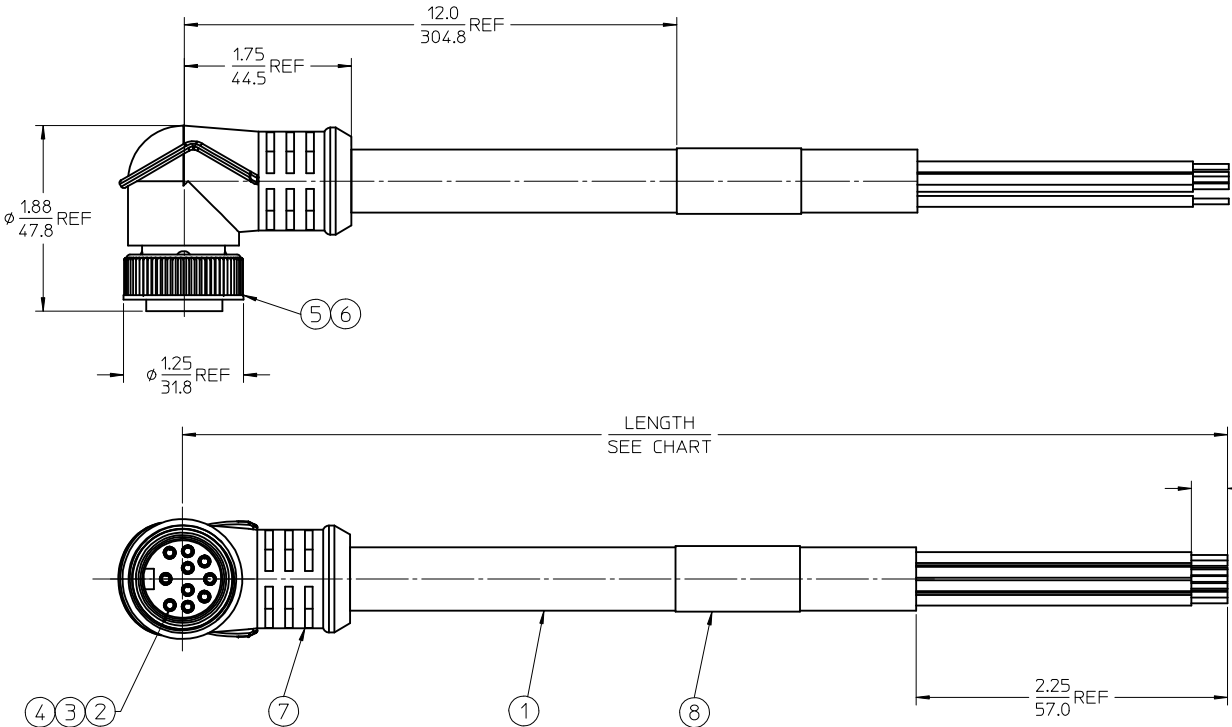

- NOTES:
- 1. MATERIAL: SEE TABLE
 - 2. FINISHES: SEE TABLE
 - 3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 - 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 - 5. MATES WITH: MINI CHANGE, C-SIZE 10 POLE RECEPTACLE
 - 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 2.5 AMPS
 - 7. ASSEMBLY IS RoHS COMPLIANT

P1	
1	BLACK
2	RED
3	PINK
4	GRAY
5	YELLOW
6	GREEN
7	WHITE
8	BLUE
9	VIOLET
10	BROWN

WIRING DIAGRAM

8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	1	OVERMOLD	PVC	YELLOW
6	1	COUPLING NUT	ZINC DIE CAST	BLACK
5	1	FRICTION RING	NYLON	NATURAL
4	10	SOCKET CONTACT	BRASS	GOLD PLATED
3	10	SOCKET SLEEVE	STAINLESS	
2	1	INSERT, FEMALE, 12 POLE	PVC	YELLOW
1	1	CABLE - #22-9,#18-1 YELLOW SPCL	PVC JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

NEW DOCUMENT
EC NO: WNAZ010-0094
DRAWN BY: DRWN:BRUPERT 2009/08/24
CHKD:BRUPERT 2009/08/26
APPR: JFMURPHY 2009/08/27

REV
A

DESCRIPTION

QUALITY SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
ANGULAR ±1/2°
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM
DRAWN BY: B.RUPERT 2009/07/06
CHECKED BY: B.WOODMAN 2009/04/27
APPROVED BY: JFMURPHY 2009/08/26

SIZE
C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE 1:1
DESIGN UNITS INCH
THIRD ANGLE PROJECTION

TITLE
MC 10 POLE, FEMALE
C-SIZE SINGLE ENDED 90D
18/1 22/9 PVC MI

DOCUMENT NO. SD-130008-020
SHEET NO. 1 OF 1

12111087654321

tb_frame_C_P_AM T
Rev. E 2006/04/15

J

I

H

G

F

E

D

C

B

A