


CUSTOMER TERMINAL	ROHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.98 ohms max.
D.C. RESISTANCE	4-5 @20°C	1.20 ohms max.
D.C. RESISTANCE	6-9 @20°C	0.24 ohms max.
INDUCTANCE	1-2 10kHz, 200mVAC, 1s	1.08mH ±10%
INDUCTANCE	1-2 10kHz, 200mVAC, 1.6ADC, 1s	800µH min.
DIELECTRIC	1-9 tie(3+4),400VAC, 1 second	-
DIELECTRIC	1-5 1800VAC, 1 second	-
TURNS RATIO	(1-2):(4-5)	2.023:1, ±2%
TURNS RATIO	(1-2):(6-9)	4.047:1, ±2%

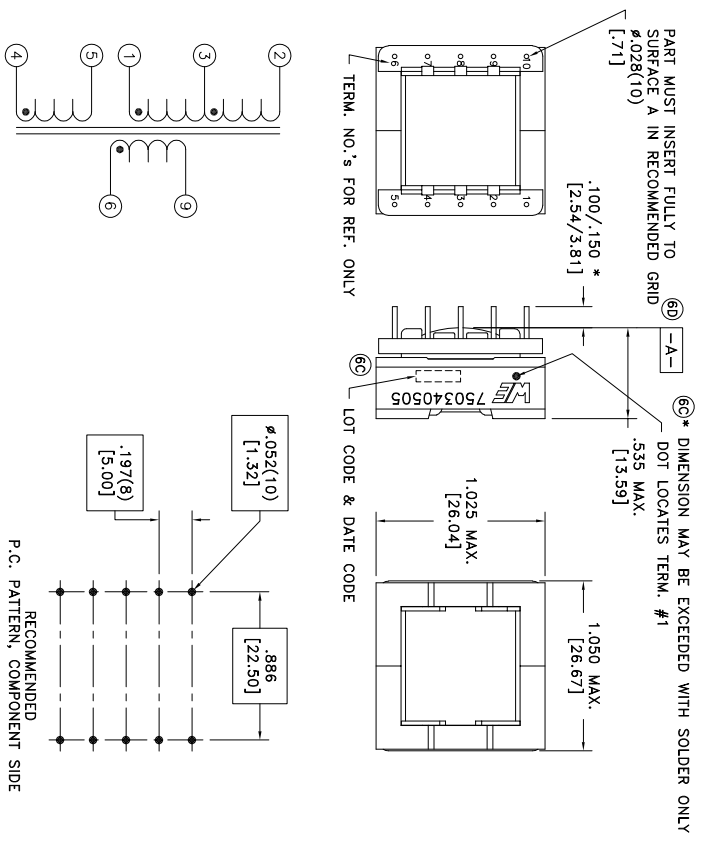

66 Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified:
6D	5/19	Method: Tray	Angles: ±1°
6C	11/15	PKG-0029	Fractions: ±1/64
6B	7/11	www.we-online.com/midcom	Decimals: ±.009
6A	8/09	SEE REVISION SHEET FOR REVISION LEVEL	Footprint: ±.001 [0.3]

DRAWING TITLE		PART NO.
TRANSFORMER		750340505
e1Sos p/n: 750340505		SPECIFICATION SHEET 1 OF 1

