
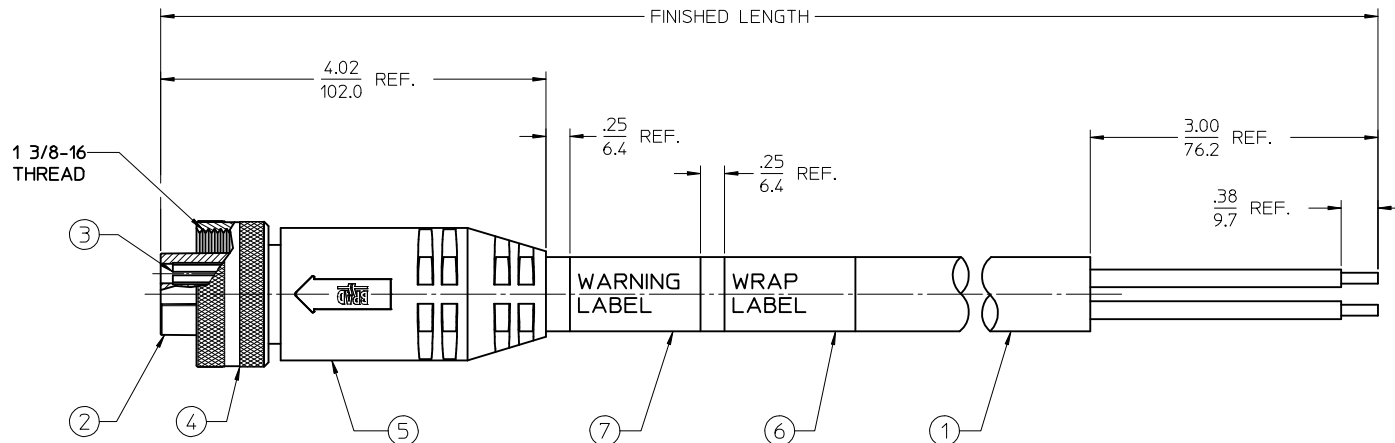




NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
- 4) MATES WITH: QUICK CHANGE 3 POLE RECEPTACLE
- 5) ELECTRICAL DATA:
10AWG UL TYPE: TC-ER STRANDED CABLE
MAX VOLTAGE: 600V PER UL 2237
630V PER IEC 60664 (B)
MAX CURRENT: 32A
PROTECTION IP67 (WHEN MATED)
TEMPERATURE RANGE: -20°C TO 90°C
- 6) PACKAGING:
CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS
WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG.
- 7) ASSEMBLY IS RoHS COMPLIANT

1	BLACK
2	GREEN/YELLOW
3	WHITE

WIRING DIAGRAM

PART NUMBER LEGEND



C03000K19M001E

- SINGLE END
POLE COUNT: 3
QC FEMALE STRAIGHT (FEMALE THREAD)
CABLE TYPE: 10 AWG TC ER, BLACK
OVERMOLD COLOR: RED
FINISHED LENGTH:
M001= .1M
M010= 1.0M
M100= 10.0M

7	1	WARNING LABEL	VINYL	ORANGE/BLACK
6	1	WRAP LABEL	VINYL	BLACK/YELLOW
5	1	OVERMOLD	PVC	RED
4	1	COUPLING	ALUMINUM	CLEAR ANODIZE
3	3	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT	PVC	BLACK
1	1	CABLE, 10/3 TC-ER (SEE NOTE 5)	TPE JACKET	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED	EC NO: JG2017-0336	DRWN:ZIELINSKI	2016/09/27
		CHKD:RSTONE	2016/09/28
		APPR:BWODMAN	2016/10/03
REV	DESCRIPTION	QUALITY SYMBOLS	
		▽=0	
		▽=0	
		▽=0	

GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
	mm	INCH	DRAWN BY	DATE	TITLE QUICK CHANGE CORD ASSY FEMALE STRAIGHT, RED 10AWG TPE CABLE molex			
4 PLACES	± ---	± ---	RSTONE	2015/12/04				
3 PLACES	± ---	± ---	CHECKED BY	DATE				
2 PLACES	± ---	± .01						
1 PLACE	± 0.3	± ---	APPROVED BY	DATE				
0 PLACE	± ---	± ---	BWOODMAN	2016/02/29	DOCUMENT NO. SD-130063-092			
ANGULAR ± 1 °			MATERIAL NO. -					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

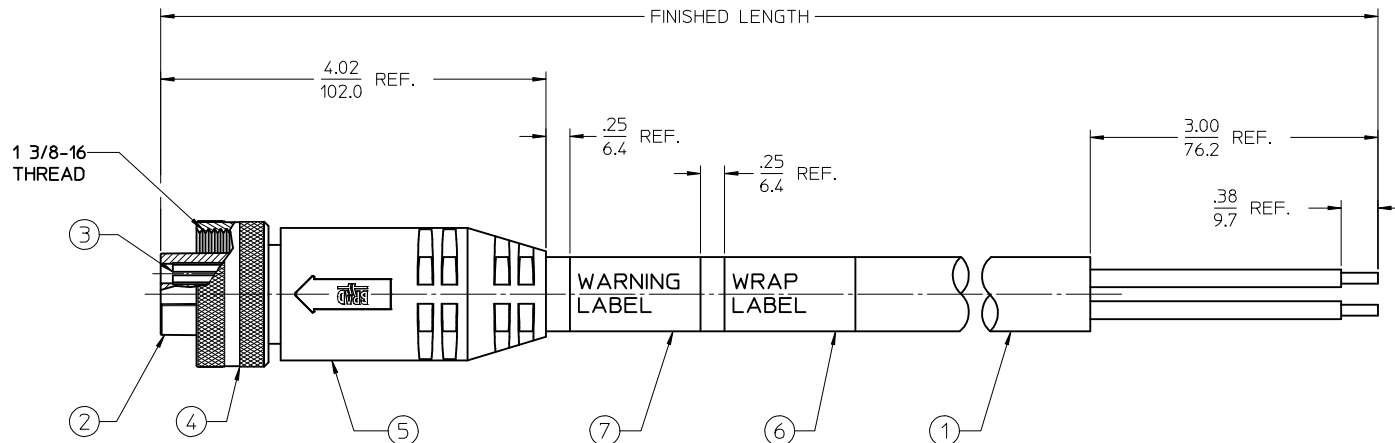

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
- 4) MATES WITH: QUICK CHANGE 3 POLE RECEPTACLE
- 5) ELECTRICAL DATA:
10AWG UL TYPE: TC-ER STRANDED CABLE
MAX VOLTAGE: 600V PER UL 2237
630V PER IEC 60664 (B)
MAX CURRENT: 32A
PROTECTION IP67 (WHEN MATED)
TEMPERATURE RANGE: -20°C TO 90°C
- 6) PACKAGING:
CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS
WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG.
- 7) ASSEMBLY IS RoHS COMPLIANT

1	BLACK
2	GREEN/YELLOW
3	WHITE

WIRING DIAGRAM

PART NUMBER LEGEND

C03000K19M001E

- SINGLE END
POLE COUNT: 3
QC FEMALE STRAIGHT (FEMALE THREAD)
CABLE TYPE: 10 AWG TC ER, BLACK
OVERMOLD COLOR: RED
FINISHED LENGTH:
M001= .1M
M010= 1.0M
M100= 10.0M

7	1	WARNING LABEL	VINYL	ORANGE/BLACK
6	1	WRAP LABEL	VINYL	BLACK/YELLOW
5	1	OVERMOLD	PVC	RED
4	1	COUPLING	ALUMINUM	CLEAR ANODIZE
3	3	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT	PVC	BLACK
1	1	CABLE, 10/3 TC-ER (SEE NOTE 5)	TPE JACKET	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: JG2017-0336 DRAWN: ZIELINSKI 2016/09/27 CHKD: RSTONE 2016/09/28 APPR: BWOODMAN 2016/10/03	REV DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± .01 1 PLACE ± 0.3 ± --- 0 PLACE ± --- ± --- ANGULAR ± 1 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE IN/MM DRAWN BY DATE RSTONE 2015/12/04 CHECKED BY DATE APPROVED BY DATE BWOODMAN 2016/02/29 MATERIAL NO. - SIZE C	SCALE 1:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION TITLE QUICK CHANGE CORD ASSY FEMALE STRAIGHT, RED 10AWG TPE CABLE molex DOCUMENT NO. SD-130063-092 SHEET NO. 1 OF 1