

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	0	D		REVISED PER ECO-06-006795	17MAY06	KW JE






1. INSULATION RANGE: 1.09–2.79 [.043–.110]
WIRE RANGE: 0.2–0.9 mm (24–18) AWG.

2 0.00203 [.000080] MIN BRIGHT TIN–LEAD OVER
0.00127 [.000050] MIN NICKEL.

3 0.00076 [.000030] MIN THICK GOLD STRIPES IN
LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER
0.00127 [.000050] MIN THICK NICKEL OVER ENTIRE
CONTACT.

4. DIMENSIONS IN BRACKETS ARE IN INCHES.

5 0.00203 [.000080] MIN BRIGHT TIN OVER
0.00127 [.000050] MIN NICKEL.

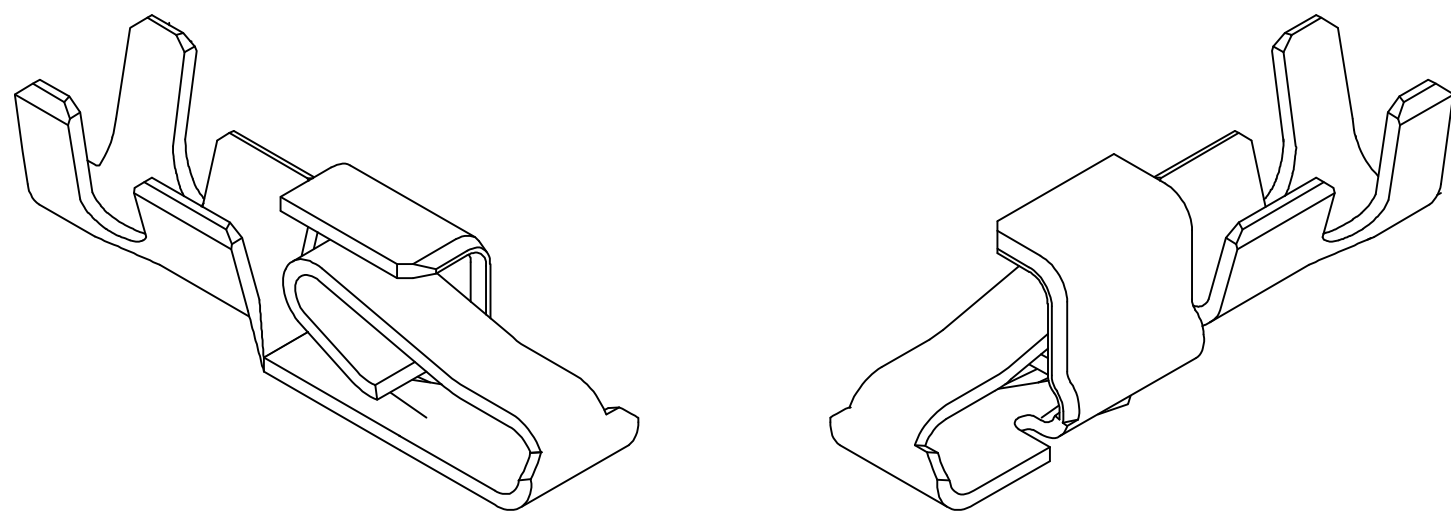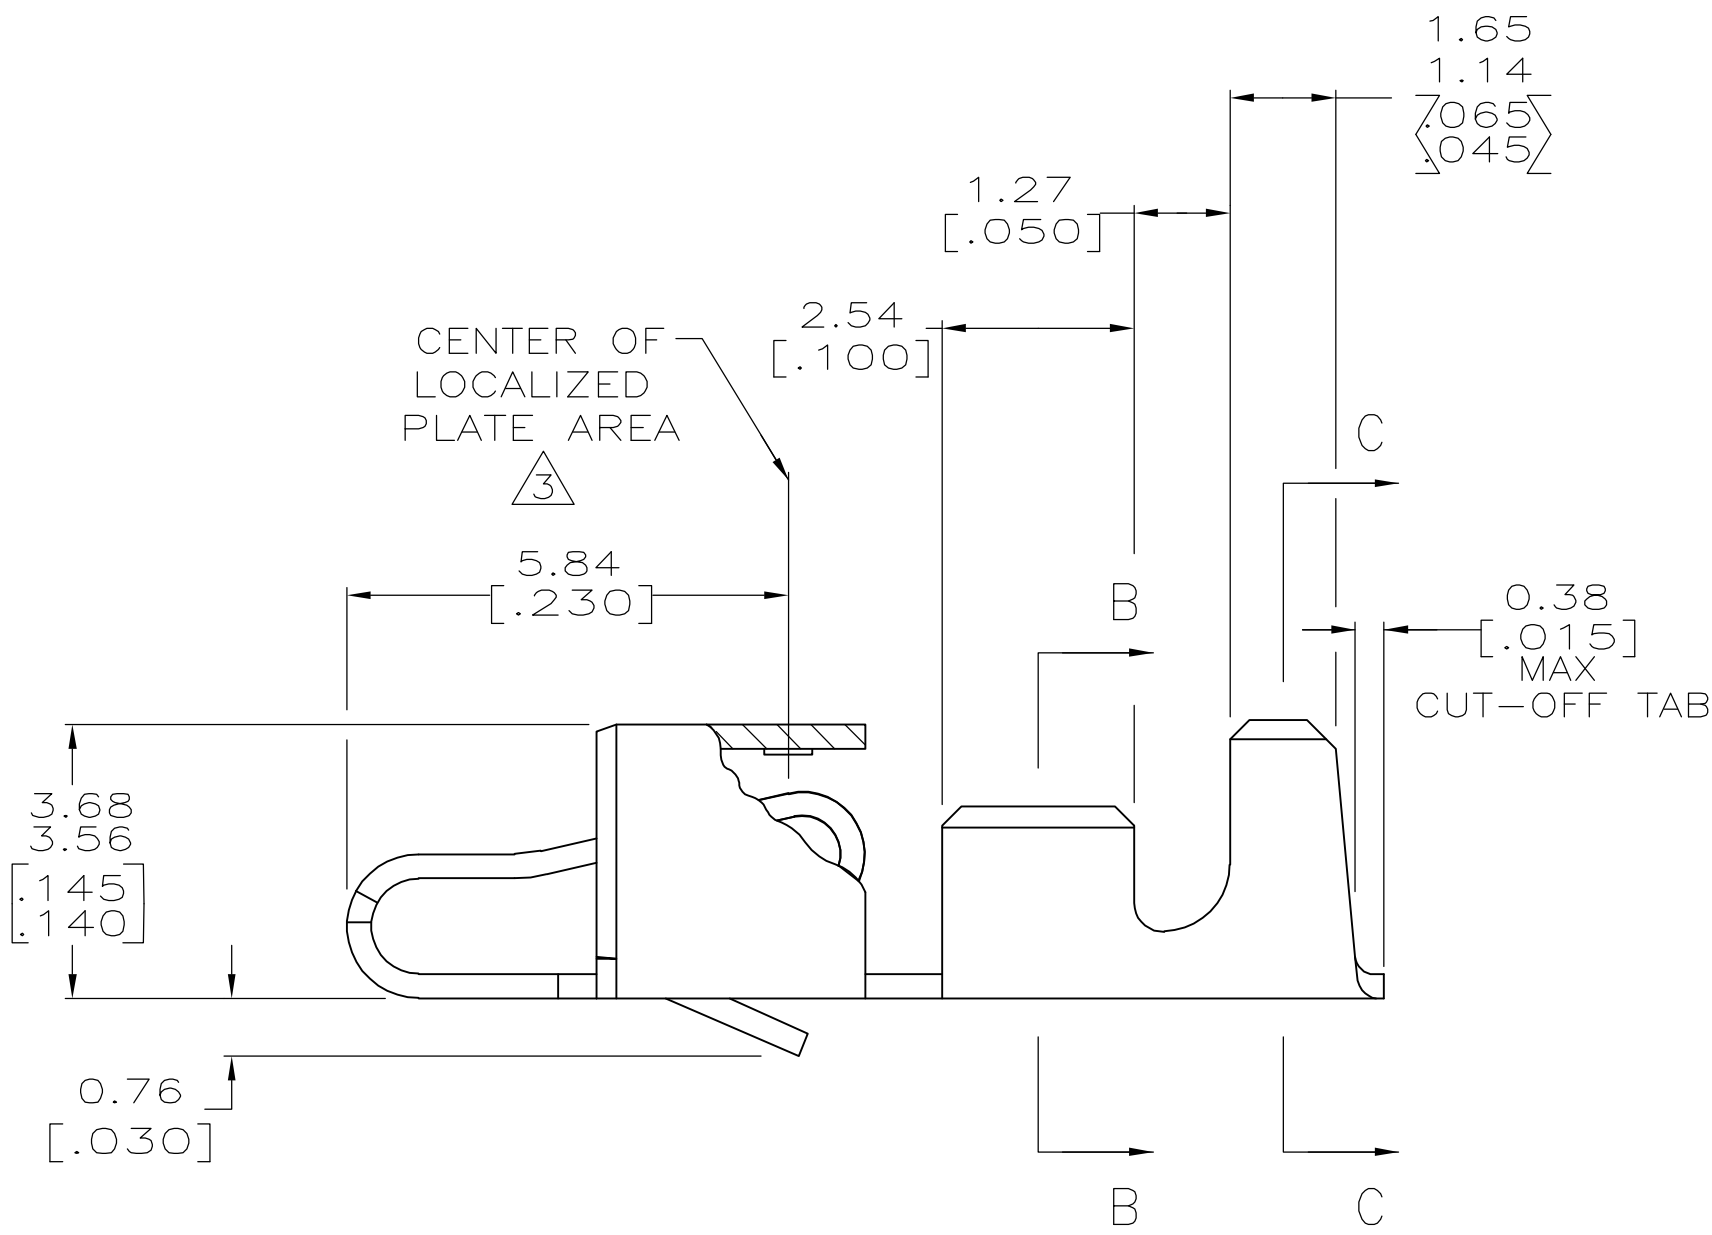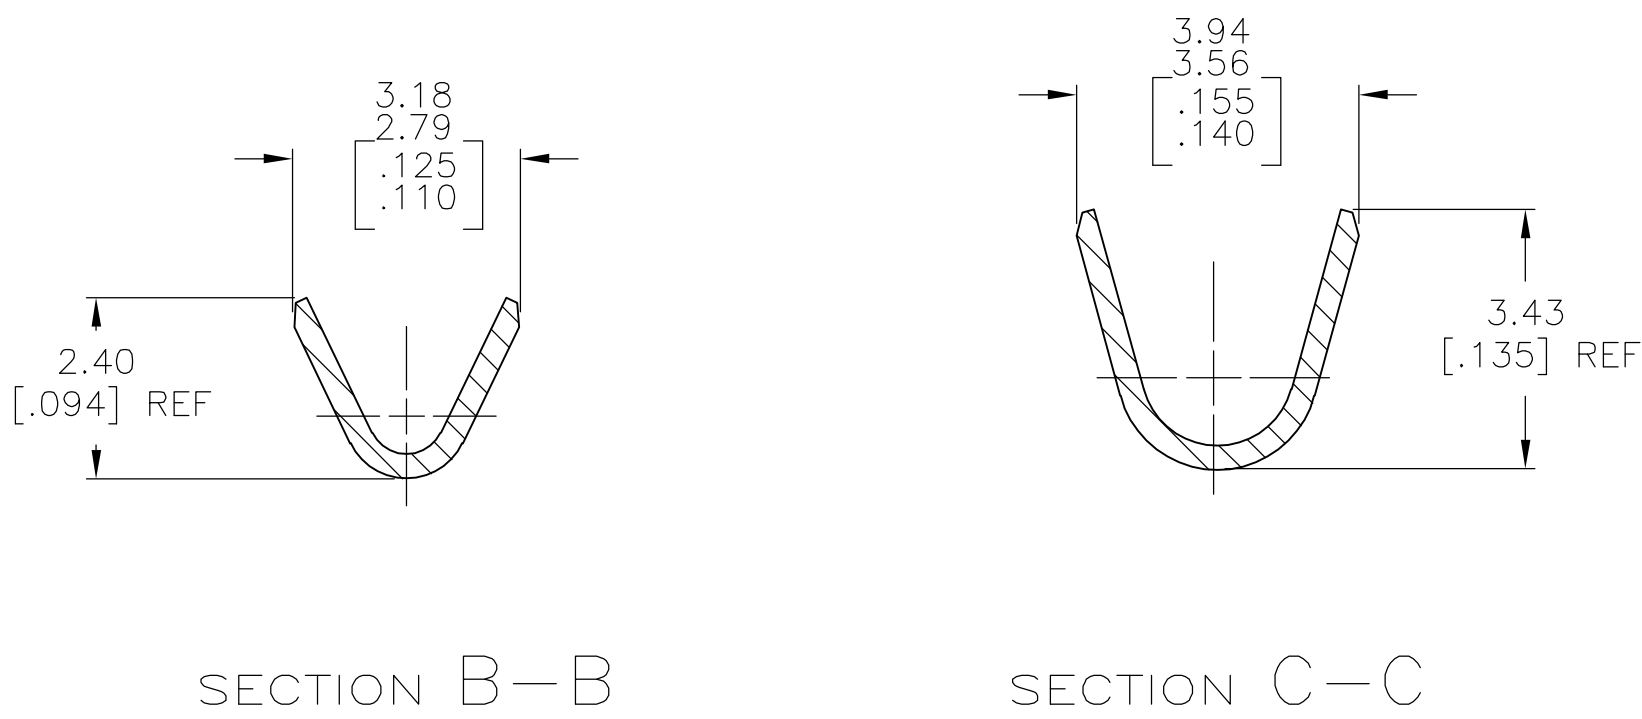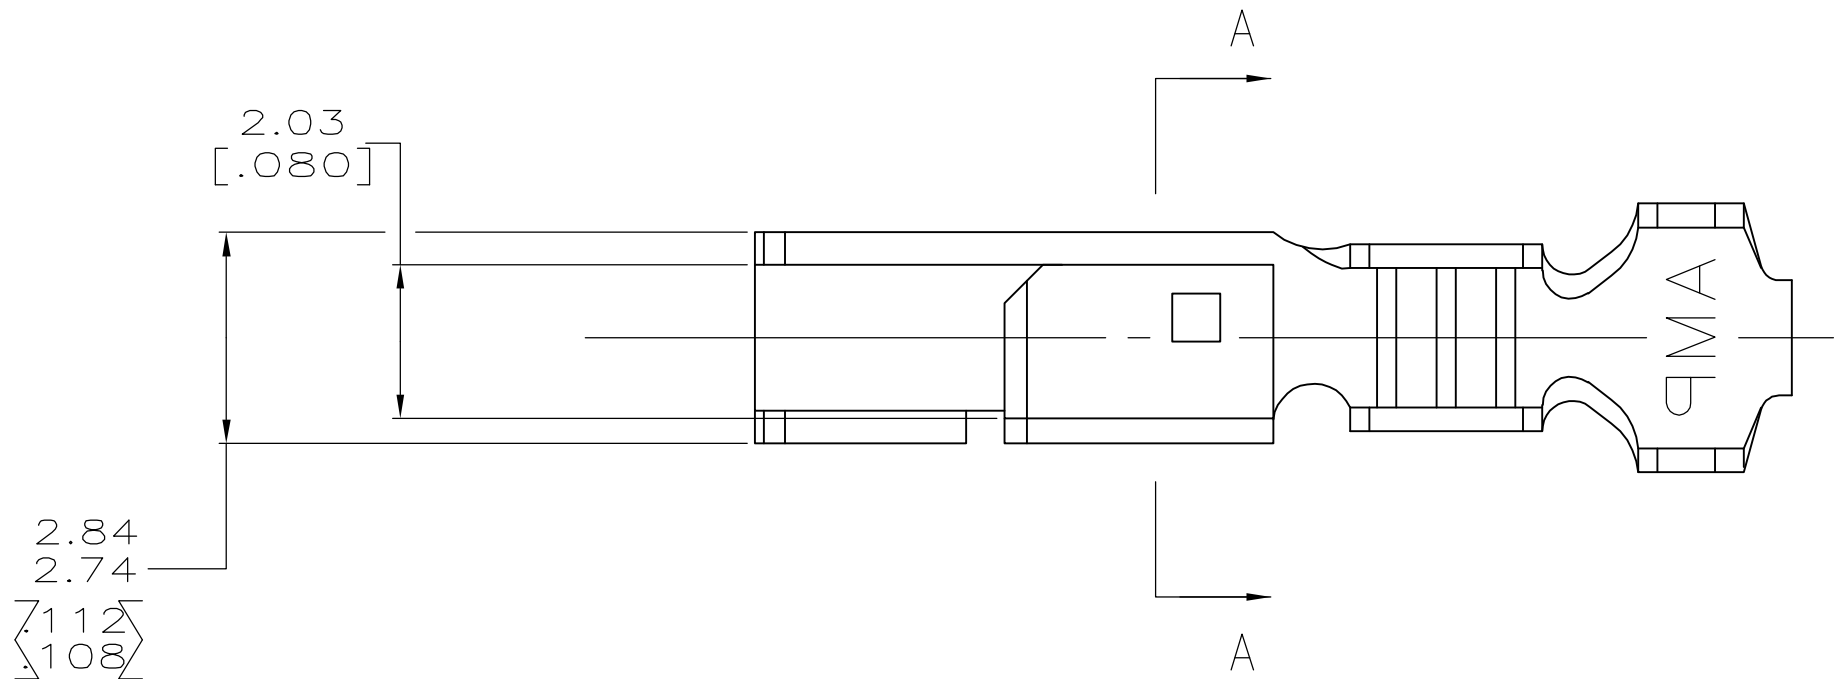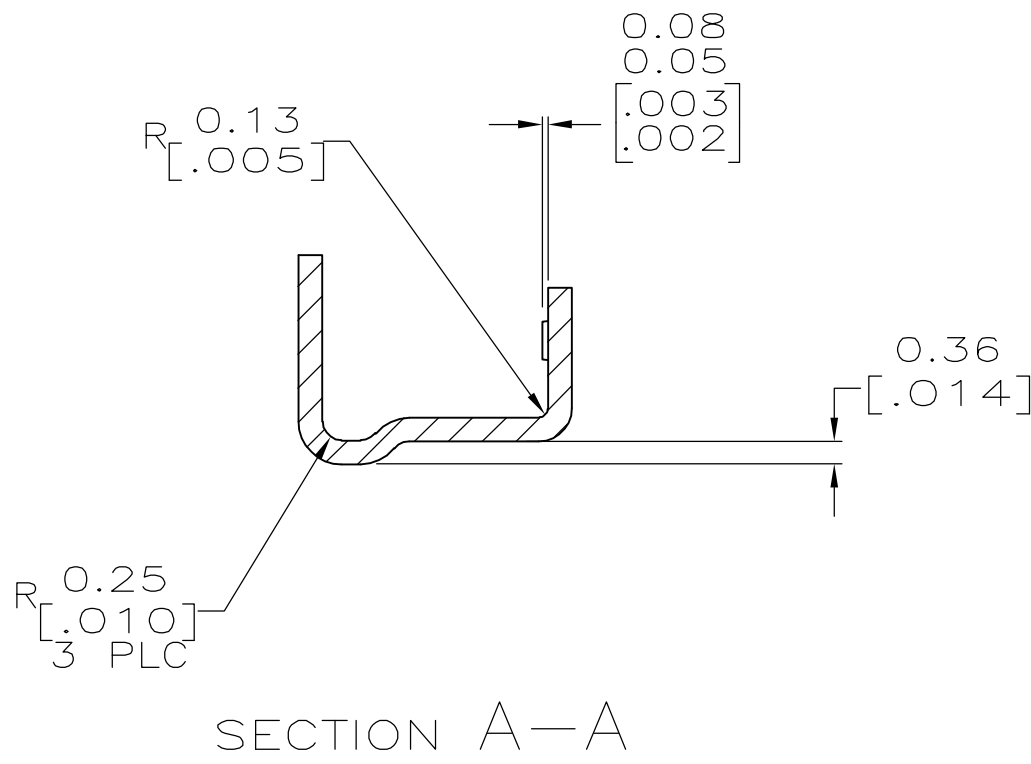

METRIC

5	3-770522-1
3	770522-2
2	770522-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 17MAY3006	Tyco Electronics Corporation Harriaburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK J. ELLIS 17MAY2006	NAME	
		APVD J. ELLIS 17MAY2006	RECEPTACLE, SL-156, LOOSE PIECE	
		PRODUCT SPEC	-	
		APPLICATION SPEC	-	
		WEIGHT	-	
MATERIAL .318 [.0125] PH BRZ		FINISH -	RESTRICTED TO -	
CUSTOMER DRAWING		SCALE 10:1	SHEET 1	OF 1