
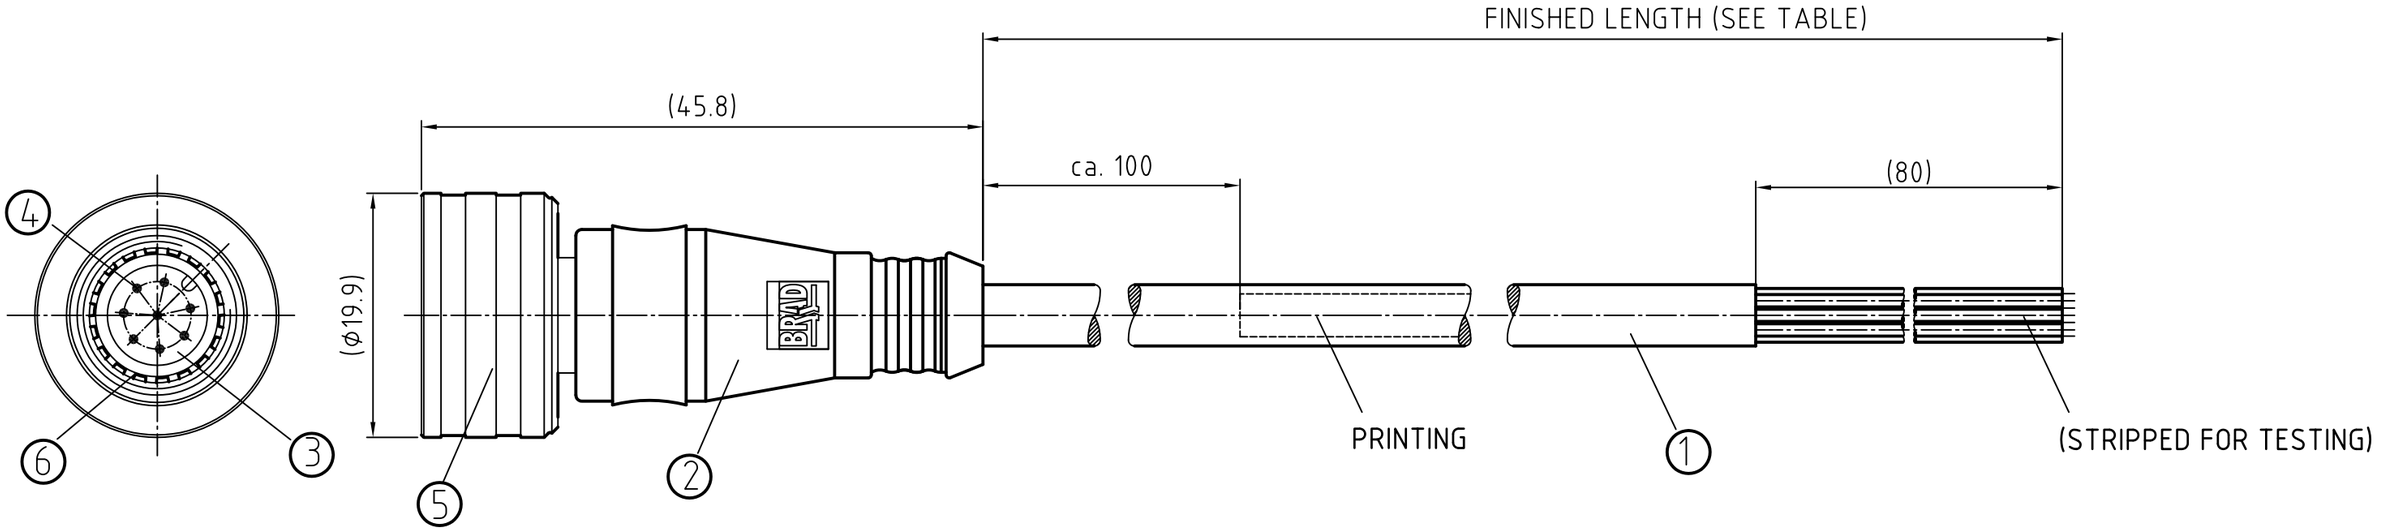


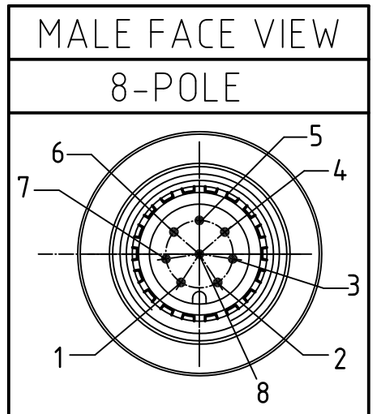

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
8	1200795115	W08006P02M020	2.0M ±25MM

CONNECTOR SPECIFICATION:	
VOLTAGE RATING	30V AC/DC
AMPERAGE RATING	max. 2 AMPS
PROTECTION	IP68
OPERATING TEMPERATURE	-30°C TO +80°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

ITEM	COMPONENT	MATERIAL	FINISH
6	O-RING	VITON	GREEN
5	COUPLER	BRASS	NICKEL PLATED
4	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	PUR	BLACK
2	OVERMOLD	TPE (PUR)	YELLOW
1	CABLE 0.25mm²/24AWG (COPPER STRANDING) 8 CONDUCT.	JACKET: PUR/PVC	JACKET: BLACK

DESCRIPTION
EC NO: WEU2010-0442 2010/03/18
DRWN: REISSNER 2010/03/18
CH'KD: FP ----
APPR: FPACHER 2010/03/19
DESCRIPTION
REV 1

QUALITY SYMBOLS
▼ = 0
Ⓒ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±---
1 PLACE	±0.3	±---
ANGULAR ±	--- °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: REISSNER DATE: 2010/03/18
CHECKED BY: NS DATE: 2010/03/18
APPROVED BY: FPACHER DATE: 2010/03/19

MICRO-CHANGE ULTRA LOCK
8-POLE MALE STRAIGHT
#24AWG PUR BLACK CABLE

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-120079-049
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION