

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/8/15	
A		UPDATE SPEC.	1/14/21	LH/LX

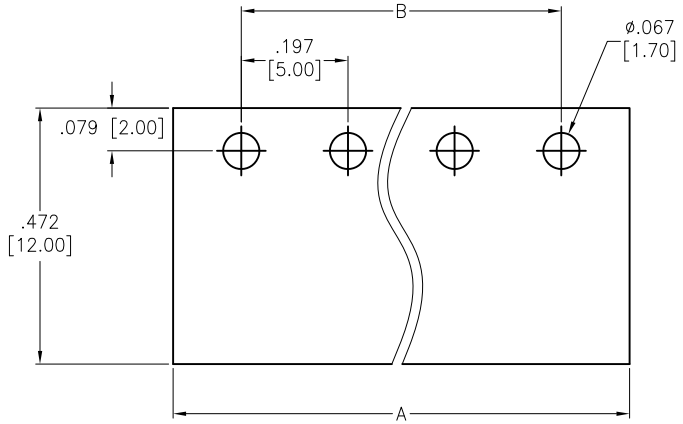

RECOMMENDED PCB LAYOUT

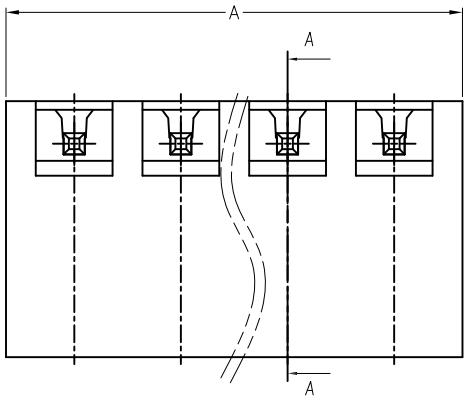

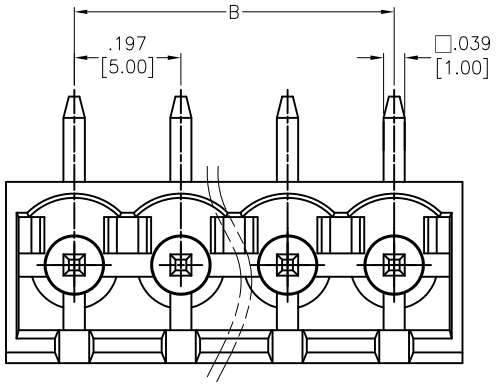

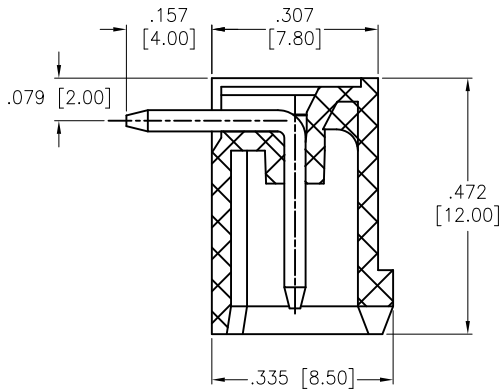

SECTION A–A

Positions: 02 thru 24
A = .197 [5.00] x No. of Positions+ .055 [1.40]
B = .197 [5.00] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V–0
Insulator color: Green
Contacts: Copper Alloy, Tin plated
Electrical:
Voltage rated: 300 V
Current rated: 15 A
Dielectric withstanding voltage: 1,600 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	4/8/15
CHECKED	NC	4/8/15
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .197 [5.00] PITCH, EURO BLOCK HEADER RIGHT ANGLE, CLOSE SIDE

SIZE	PART NO.	REV.
X	EBQA-XX-C-C	A

REF: S00067C | SCALE: NTS | SHEET 1 OF 1