




Kontaktbezeichnung
contact marking

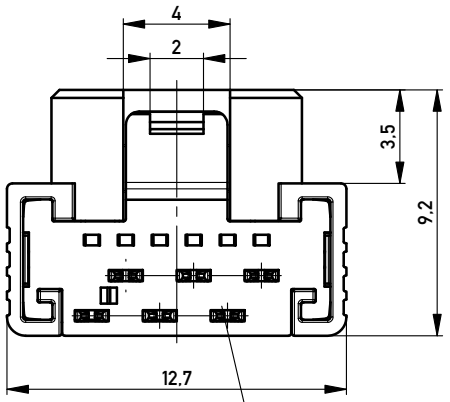

Kabelführung: schwarz
cable guide: black




mit aufgesetzter Kabelführung (Anlieferungszustand)
with cable guide mounted (state at time of supply)




Kabelführung verpresst
(cable guide pressed on)


Funktionsrelevantes Prüfmerkmal
siehe Verarbeitungsspezifikation MiniBridge ERNI Elektronics GmbH

Verpackt in Tray - *tray packaging*
Verpackungseinheit 168 Stück - *packaging unit 168 pcs*

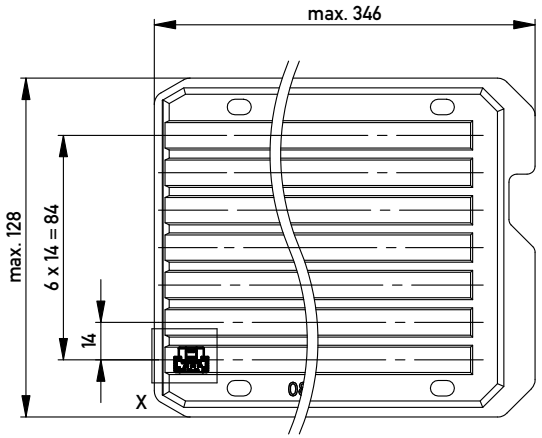

Einzelheit X - *detail X*
M 2:1



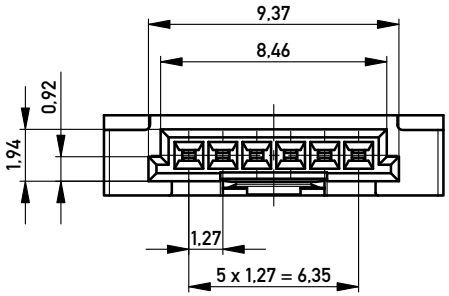

ohne Hilfsmittel lösbar
without tool unlockable

Information:	Tolerances / All Dimensions in mm	Scale 5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation: F 1,27 SRC A IDC 06-pin *d=1,07 AWG 24/26 Friction Lock*	
c / 19.05.2015 / Index / Date	ERNI www.ERNI.com	224399	I / A3
		Class SRCA	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.