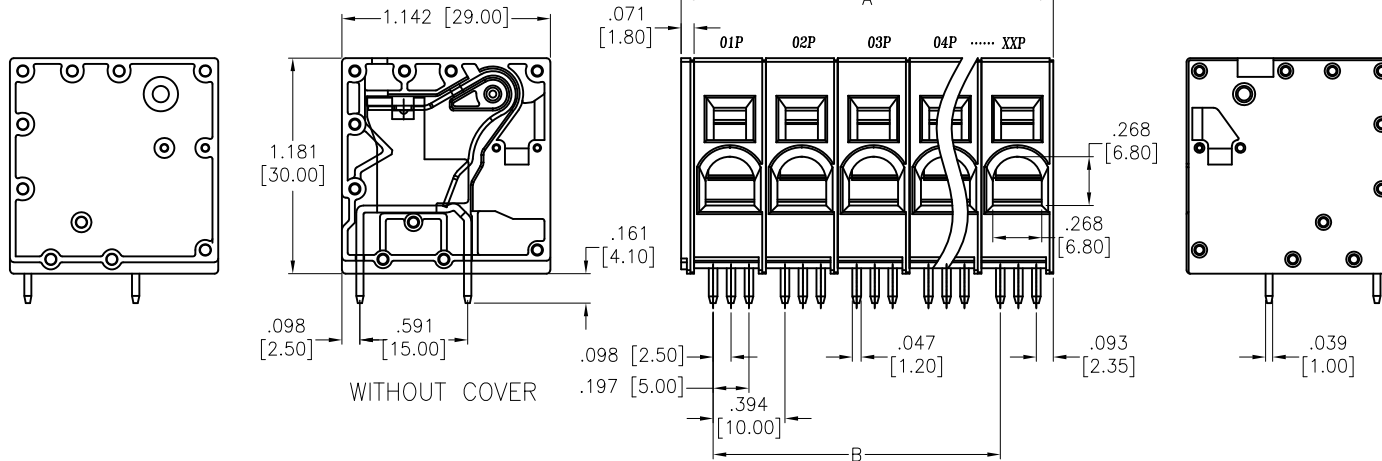
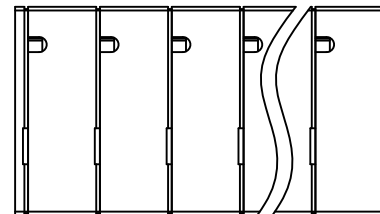
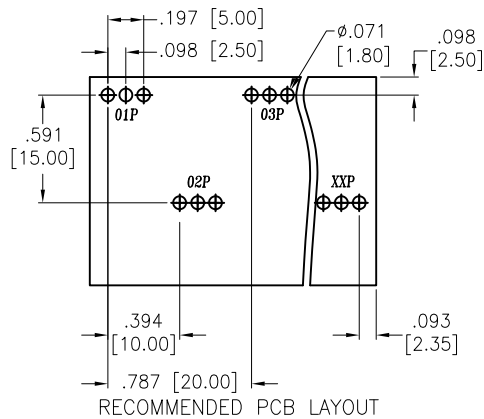


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/18	

**SPECIFICATIONS:****Material:**

Insulator: PA, rated UL 94V-0

Insulator color: Green

Contact: Copper Alloy, Tin plated

Electrical:

Voltage rating: 600 V

Current rating: 66 A

Dielectric withstanding voltage: 2,200 VAC for 1 minute

Mechanical:

Strip length: 18~19mm

Wire Range: 4~18 AWG

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Poles: 01 thru XXP

A = .394 [10.00] X No. of Positions +.071 [1.80]

B = .394 [10.00] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	AY	11/26/18
CHECKED	AC	11/26/18
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
SPRING CLAMP EURO BLOCK, .394 [10.00] PITCH			
SIZE	PART NO.	REV.	
X	EB167A-XX-H	-	
REF:	S00067C	SCALE:	NTS
SHEET 1 OF 1			