
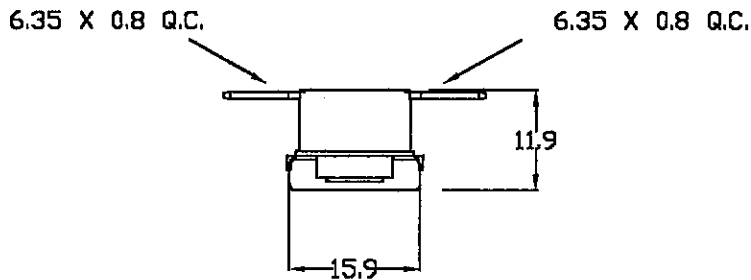


ALL DIMENSIONS ARE FOR REFERENCE ONLY

DO NOT SCALE DRAWING

ALL DIMENSIONS IN mm UNLESS STATED.

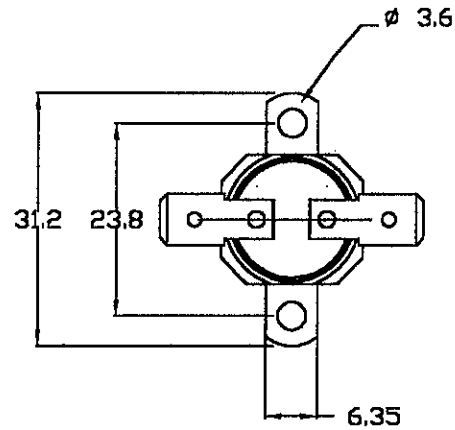

OPERATING CRITERIA	
VOLTS;	240VAC
AMPS;	10A
OPERATING CRITERIA	
OPEN;	100±4°C
CLOSE;	85±5°C

SPECIAL ARRANGEMENTS
PURPLE SPOT
NOTE:- CODING TO SUIT MANUFACTURING SITE

ISSUE MOD No. MTH/YR	A 3052 03/97	B 3358 07/98	C 3640 01/01	
-------------------------	--------------------	--------------------	--------------------	--

ELMWOOD DEVICE & UNIQUE PART NUMBER 2455RP-9100-438(UK) 2455RP-7100-438(CHINA)	DATE OF ISSUE STAMP <i>18 JAN 2001</i>
--	---

<b>Elmwood Sensors</b>	ELMWOOD DRG No.	ISSUE
	965206	C

ELMWOOD DRG No.	965206	ISSUE	C
-----------------	--------	-------	---

NOTE:- ORIENTATION OF BRACKET IS NOT FIXED

DRAWN BY;  
G.D.

CODING REQUIREMENTS
COLOUR; WHITE
L100C
9100-438-UXX
7100-438-ZXX
(XXX = DATE CODING)

CAP;	MAT'L;	BRK'T;	B203S	MAT'L;	STEEL
		PLATING;		PLATING;	NICKEL
TERMINAL;	T146				
MATERIAL;	BRASS				
PLATING;	-				