
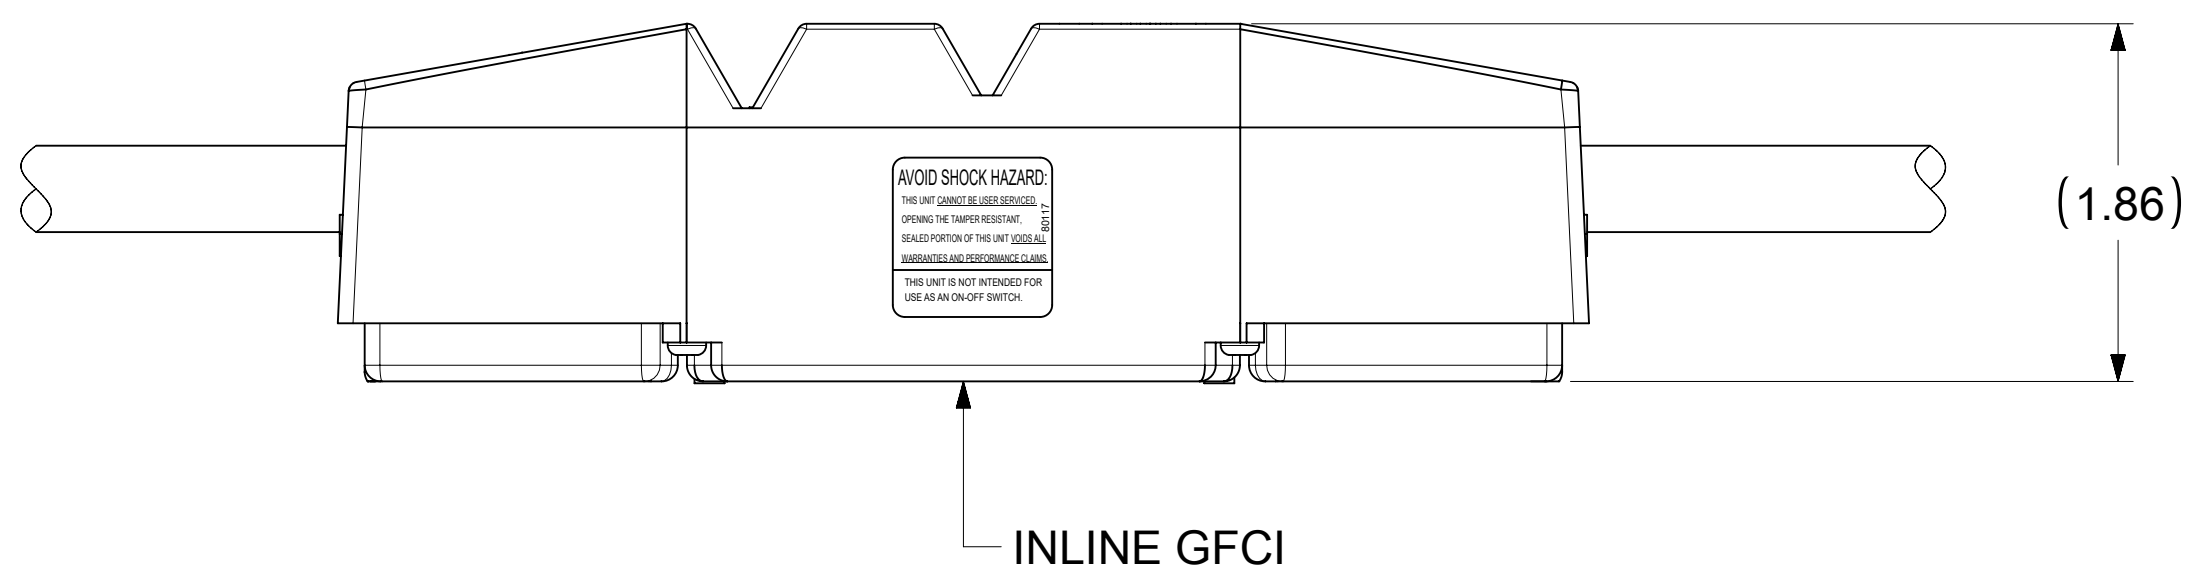
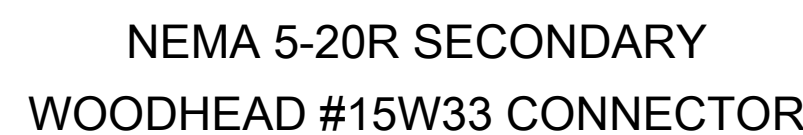
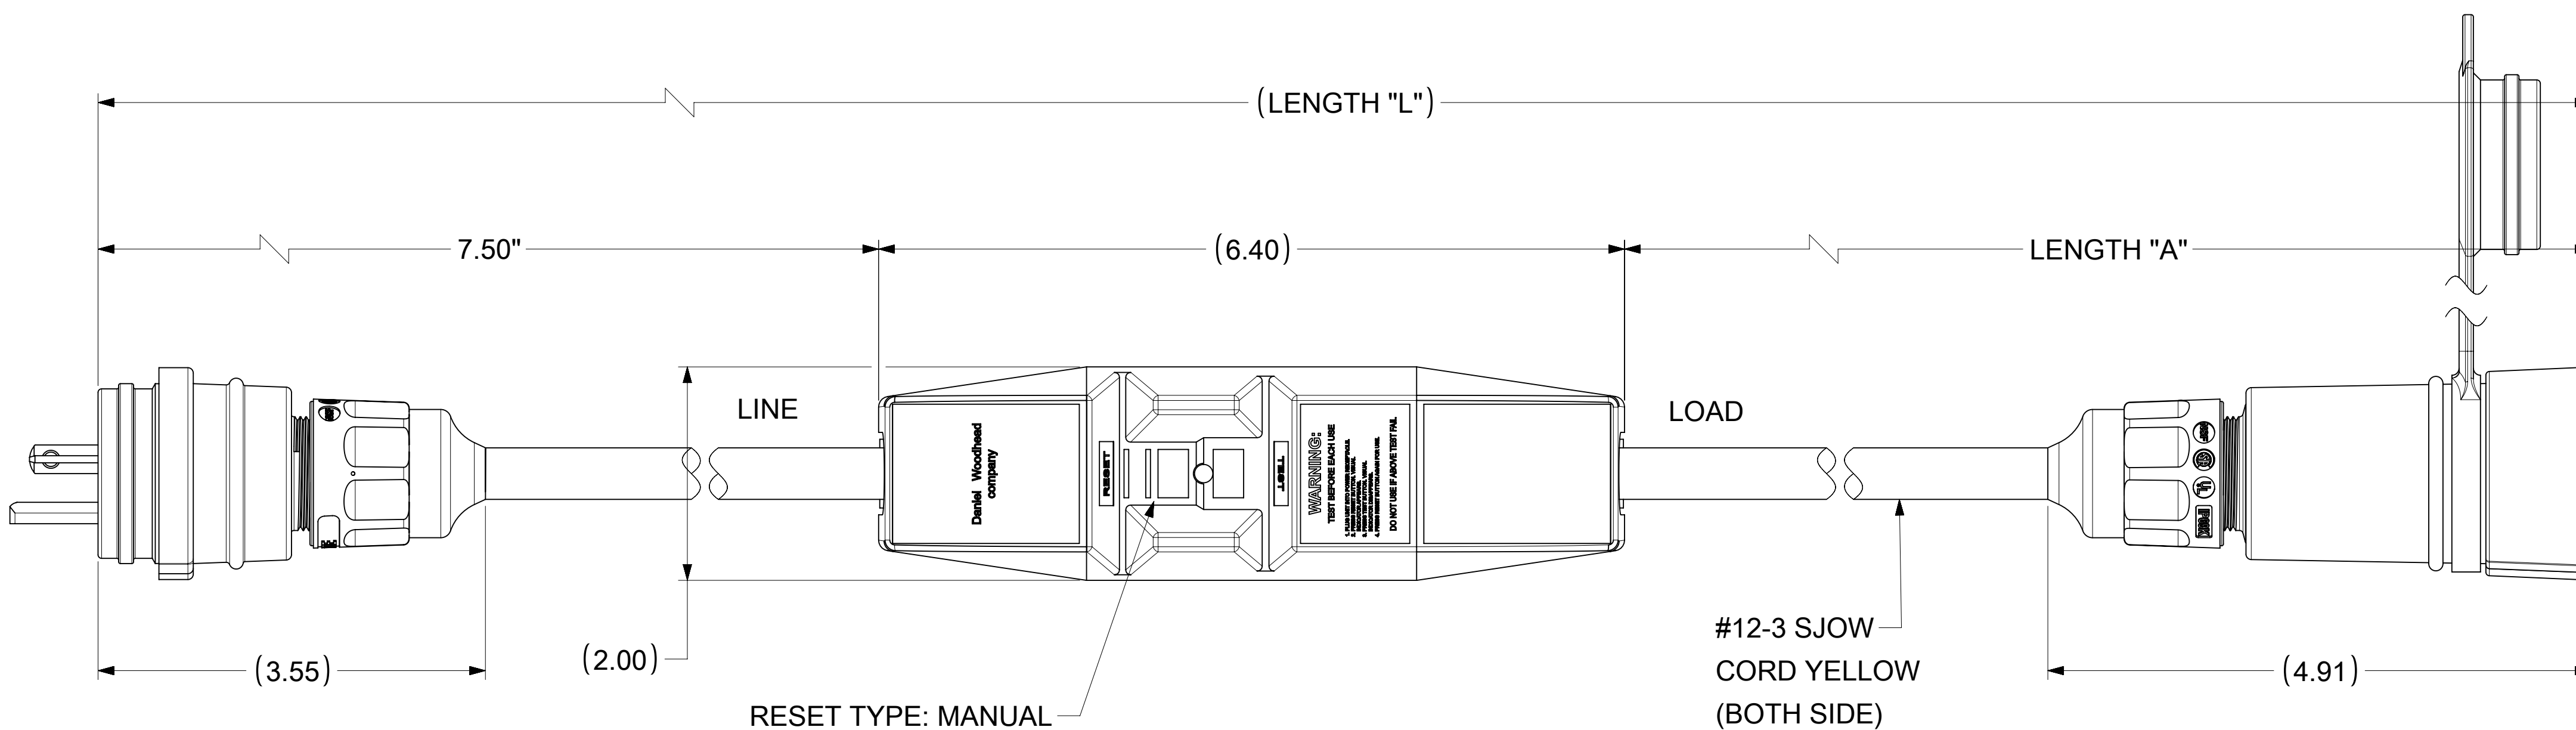


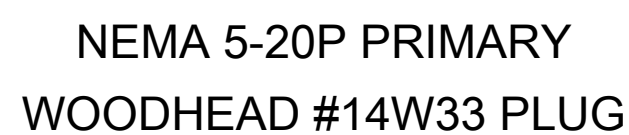

INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

CURRENT REV DESC: NEW SALES DRAWING CREATED	molex				
	GFICI INLINE 20A, 120V ATTACHABLE W/PLUG & CONN. WATERTITE				
	PRODUCT CUSTOMER DRAWING				
	DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
EC NO: 693149 DRWN: PPURSUTANDEL 2021/12/08 CHK'D: DNGUYEN62 2022/01/26 APPR: HKNEELAND 2022/04/28	1301530122		PSD	000	A
INITIAL REVISION: DRWN: AL 2003/10/07 APPR:					
THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	D-SIZE	130153	SEE TABLE	GENERAL MARKET	1 OF 1

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
F = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW SALES DRAWING CREATED				molex						
	INCH		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
F = 0		ANGULAR TOL							±		°				
E = 0	4 PLACES		±						EC NO: 693149						
	3 PLACES		±						DRWN: PPURSUTANDEL		2021/12/08				
	2 PLACES		±		CHK'D: DNGUYEN62		2022/01/26								
	1 PLACE		±		APPR: HKNEELAND		2022/04/28								
	0 PLACES		±		INITIAL REVISION:										
DIVISIONAL SYMBOLS	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
					D-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1		

TECHNICAL

LISTED:	cULus
RATED SUPPLY VOLTAGE:	120 VAC
RATED CURRENT:	UP TO 20 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	120 AMP
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 3R

DOCUMENT STATUS	P1	RELEASE DATE	2022/04/28	15:45:39
-----------------	----	--------------	------------	----------