
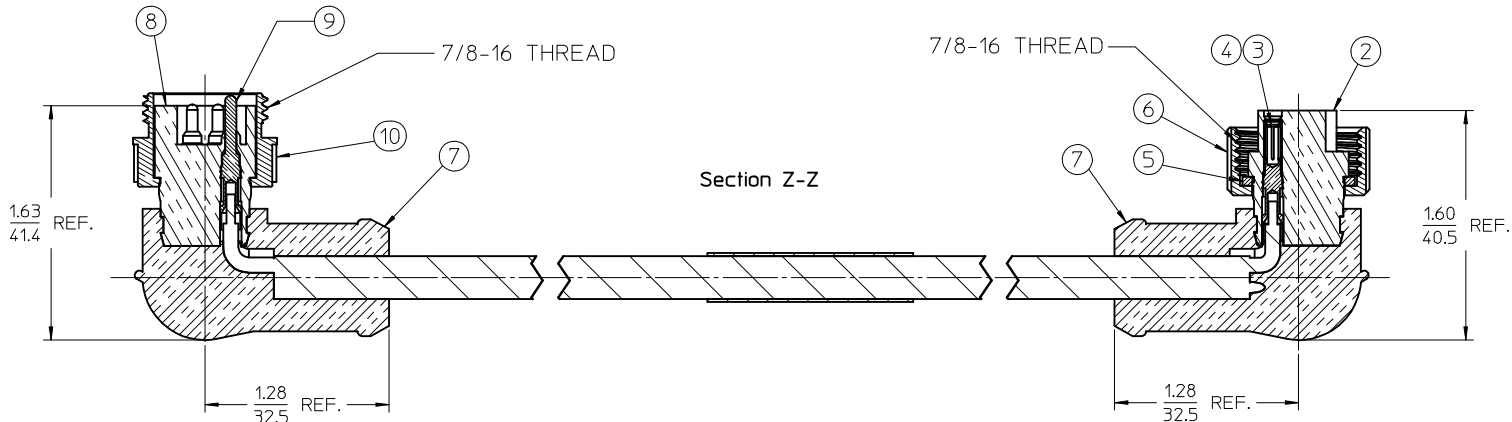
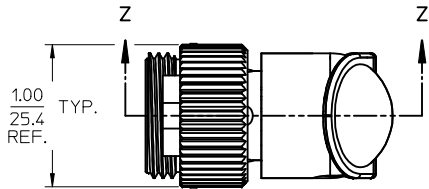
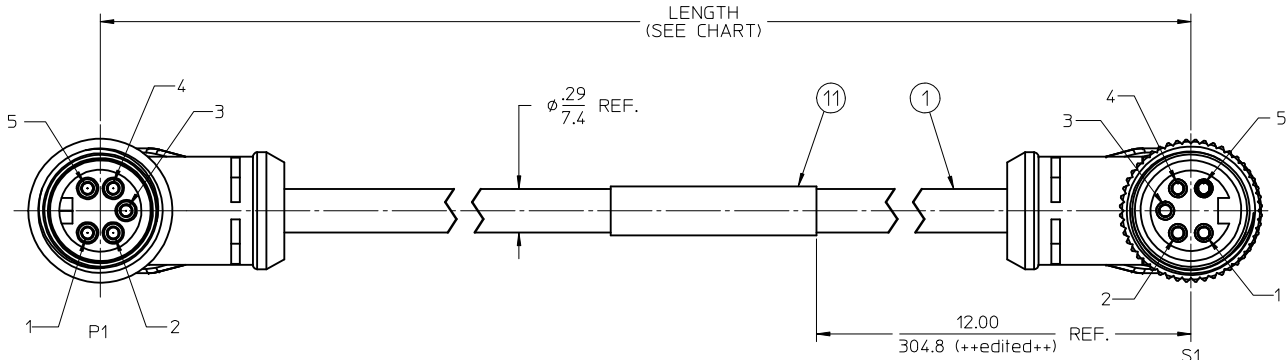


PART NUMBER	ENGINEERING NO.	LENGTH
1300250543	DND99A-M010	3' 3" +2.19 - 0 [1.0M +55.6 - 0]
1300250544	DND99A-M030	9' 10" +3.50 - 0 [3.0M +88.9 - 0]
1300250545	DND99A-M050	16' 5" +6.50 - 0 [5.0M +165.1 - 0]

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, A-SIZE 5 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 300V
CURRENT RATING: 4 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT

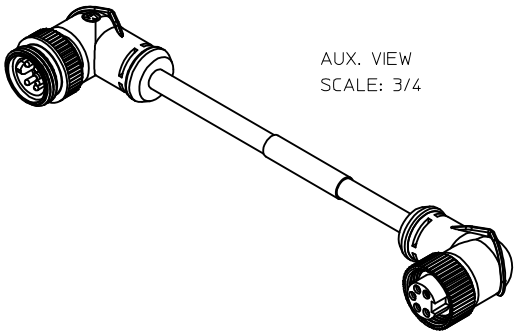

P1		S2
1	DRAIN	1
2	RED +V	2
3	BLACK -V	3
4	WHITE CAN H	4
5	BLUE CAN L	5

WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
11	1	LABEL	PLASTIC FILM	BLACK/YELLOW
10	1	COUPLING NUT, MALE	ZINC DIE CAST	BLACK
9	5	CONTACT PIN, 22 AWG	BRASS	GOLD PLATED
8	1	INSERT, MALE, 5 POLE	PVC	GRAY
7	2	OVERMOLD, 90 DEG	PVC	GRAY
6	1	COUPLING NUT, FEMALE	ZINC DIE CAST	BLACK
5	1	FRICTION RING	NYLON	WHITE
4	5	SOCKET SLEEVE	ST. STEEL	
3	5	CONTACT SOCKET, 22 AWG	BRASS	GOLD PLATED
2	1	INSERT, FEMALE, 5 POLE	PVC	GRAY
1	1	CABLE, DEV-NET, DROP, 4/22	PVC JACKET	GRAY

RELEASED

EC NO: WNA2010-0073

DRWNR:STONE

CHKD:B. WOODMAN

APPR:J.MURPHY

2009/07/31

2009/08/10

REV

A

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES ±	---	---
3 PLACES ±	---	---
2 PLACES ±	---	±.01
1 PLACE ±	±0.3	---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE

MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

IN/MM

DRAWN BY

R.STONE

DATE

2009/07/30

CHECKED BY

B. WOODMAN

DATE

2009/07/31

APPROVED BY

J. MURPHY

DATE

2009/08/05

SCALE

1.5:1

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

TITLE

MINI-CHANGE, CORD ASSY

M/F 90 DEG, DEVICE NET

THIN, DROP

MOLEX INCORPORATED

MATERIAL NO.

SEE CHART

DOCUMENT NO.

SD-130025-023

SHEET NO.

1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION