
MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
1300240355	DNDF90A-M010	3.28′ +3.5″ -0 [1.0M +88.9mm -0]

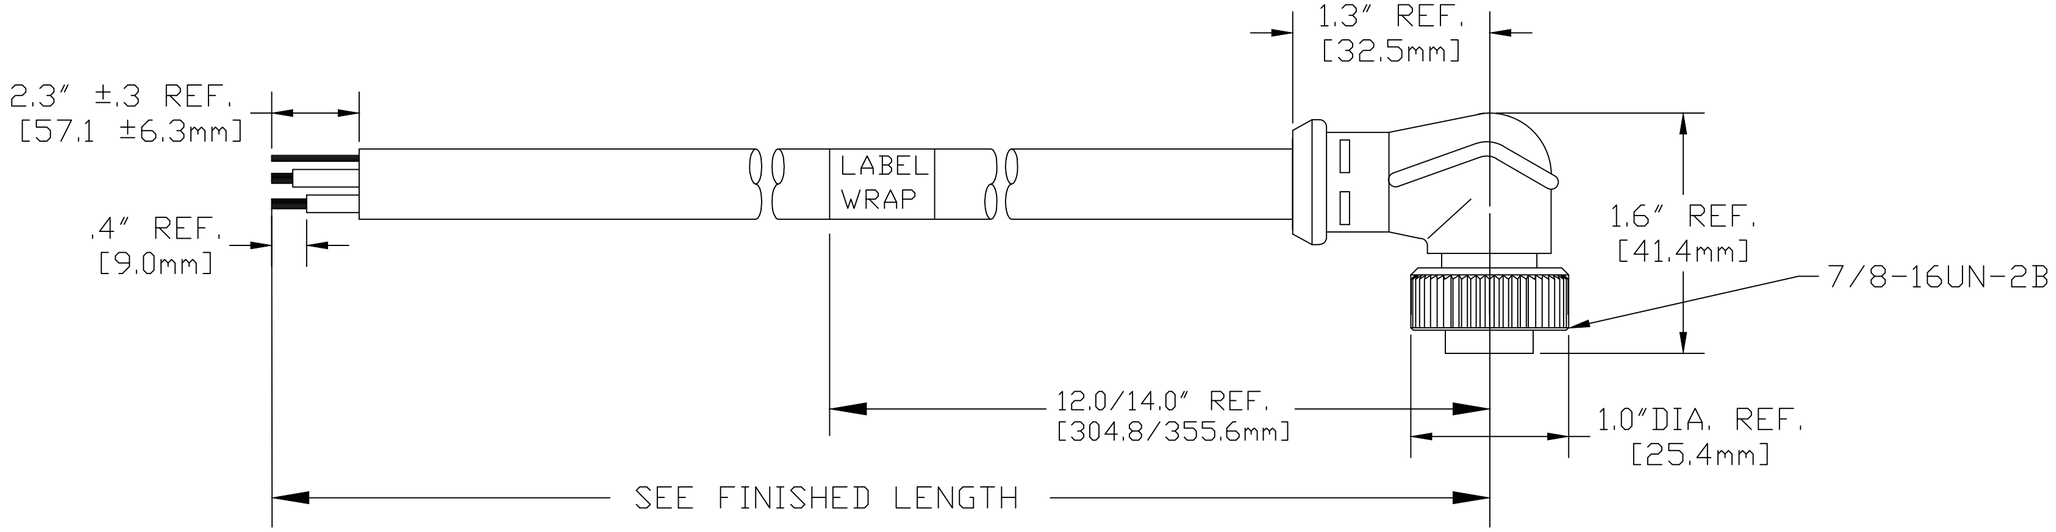


DNDF90A-M010

Cable type
DEVICENET
FLEX DROP

cable length
M010----1 Meter
M100----10 Meter

FEMALE INSERT
FRONT VIEW



CONTACT:	GOLD/NICKEL OVER COPPER ALLOY
INSERT:	PVC, GRAY
COUPLING NUT:	ZINC DIE CAST, BLACK E-COATED
MOLDED BODY:	RITEFLEX, GRAY
VOLTAGE RATING:	300 VAC/VDC
AMPERAGE RATING:	4 AMPS
PROTECTION:	IP67
OPERATING TEMPERATURE:	-20°C TO 80°C
CERTIFICATIONS:	UL RECOGNIZED FILE NO. E152210 CSA CERTIFIED FILE NO. LR6837



WIRING DIAGRAM

REV	DESCRIPTION	DRWN	CH'KD	APPR	EC NO
A	INITIAL RELEASE	GGUSTAFS 2013/08/30	BARDEN	BWOODMAN2013/10/07	IPG2014-0457

QUALITY SYMBOL
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±0.13	±.010
1 PLACE	±0.25	±.020
ANGULAR ±.5°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: NTS
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: EBRACKEN DATE: 2013/06/18
CHECKED BY: BARDEN DATE: 2013/09/12
APPROVED BY: BWOODMAN DATE: 2013/10/07

TITLE: MINI-CHANGE DEVICENET 5 POLE 90D FEMALE 22/24 DROP CABLE GRY TPE

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-130024-023
SHEET NO.: 1 0F 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION