




DESCRIPTION: M8 MALE - CABLE MOUNT - SOLDER CUP - 5 POS.

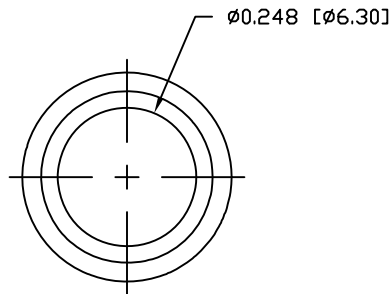


NUT

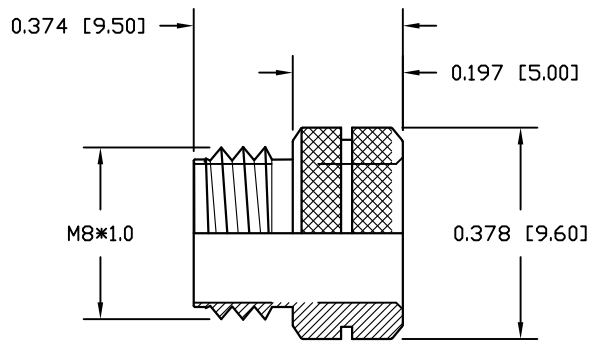

NO O-RING

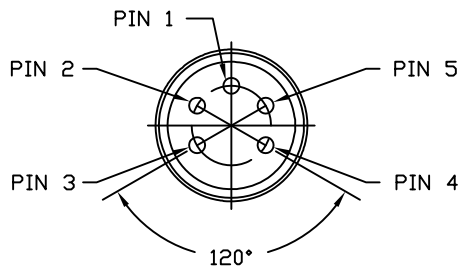

Ø0.276 [7.00]

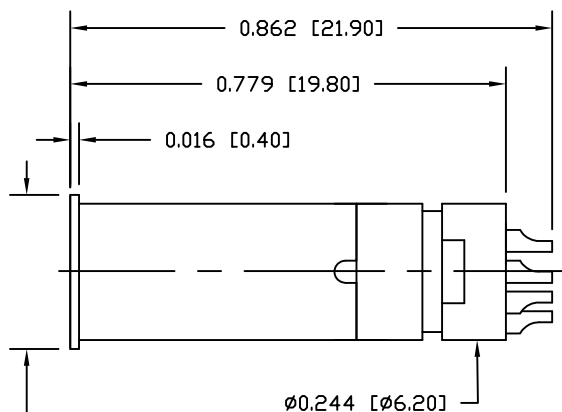

NOTE:

MATERIAL

HOUSING:

CONTACT:

NUT:

SHELL:

FINISH

CONTACT:

SHELL:

NUT:

ELECTRICAL

RATED CURRENT:

RATED VOLTAGE:

INSULATION RESISTANCE:

CONTACT RESISTANCE:

WATER PROOF:

ENVIRONMENT

OPERATION TEMPERATURE:

MAX WIRE AWG:

PBT UL94V-0, BLACK
BRASS
BRASS
BRASS


GOLD PLATED
OVER 50µ" NICKEL
NICKEL PLATED
NICKEL PLATED

1.5A
30V
100 MΩhms MIN.
10 mΩhms MAX.
IP67

-40°C TO +85°C
26 AWG

854A005-103RLSY

1 = GOLD FLASH
4 = 10µ" GOLD

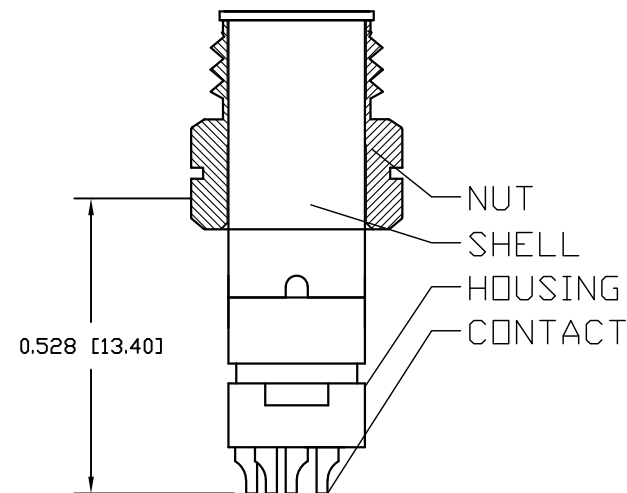

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

03-04-16

NorComp

SCALE:

N.T.S.

SHEET

1

OF

1

REV

4

DWG NO.

854A005-103RLSY