


DESCRIPTION: M8 FEMALE - CABLE MOUNT - SOLDER CUP - 3 POS.

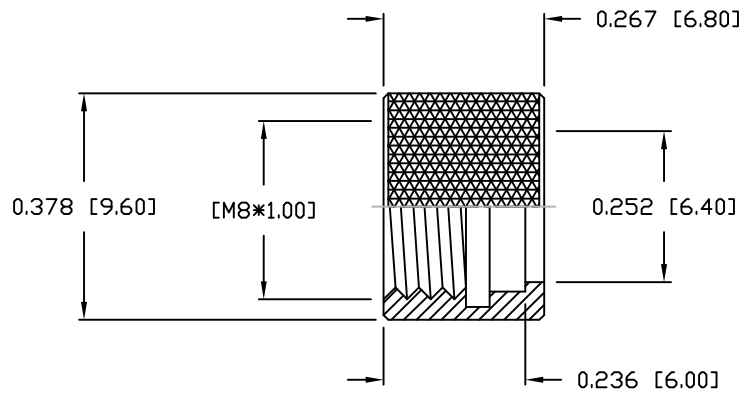

NUT

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK
CONTACT: BRASS
GROUND: BRASS
SHELL: BRASS
O-RING: NBR

FINISH



CONTACT: GOLD PLATED
UNDER PLATE: NICKEL
GROUND: NICKEL 60 μ BRIGHT TIN
SHELL: NICKEL

ELECTRICAL

RATED CURRENT: 3A
RATED VOLTAGE: 60V
INSULATOR RESISTANCE: 100 M Ω hms MIN.
CONTACT RESISTANCE: 10 m Ω hms MAX.
WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C
MAX WIRE AWG: 24

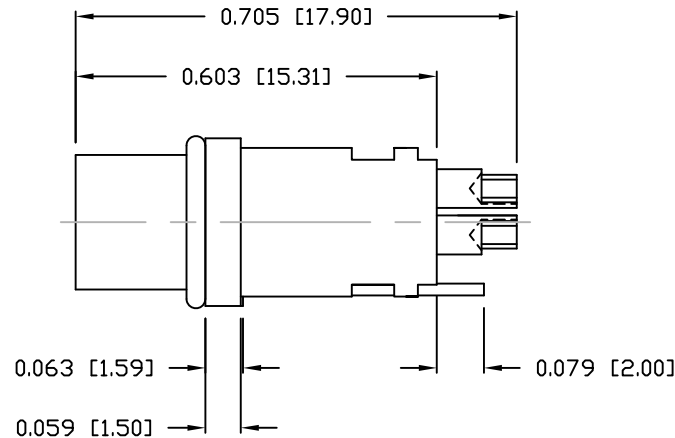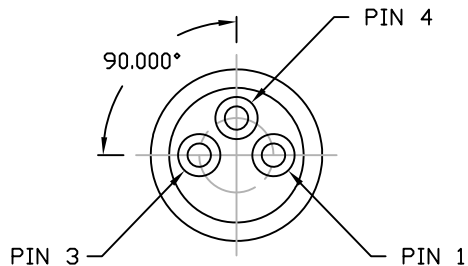

854-003-203RLSY

1 = GOLD FLASH
4 = 10 μ " GOLD

RoHS COMPLIANT

UNITS = INCHES [MM]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

03-04-16

NorComp

SCALE:

NTS

SHEET

1

OF

1

REV

6

DWG NO.

854-003-203RLSY