

6

5

4


3

2



1

SAP P/N#	ENGINEERING NO.
1200840028	WR4U46000


AUX VIEW
SCALE 3:4



FRONT VIEW

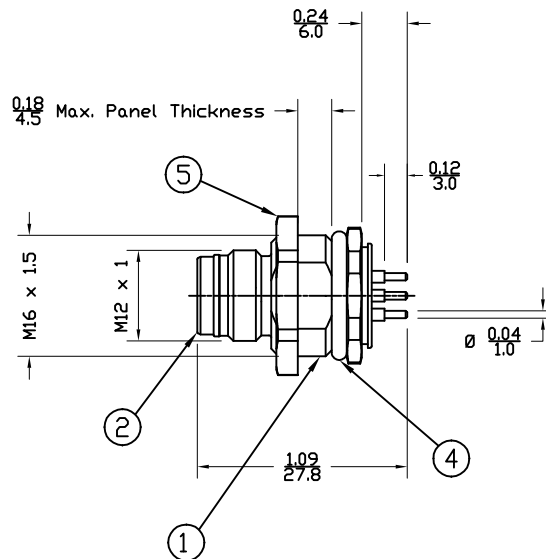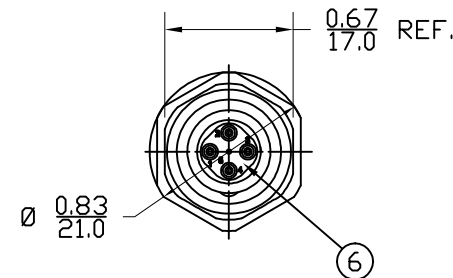

BACK VIEW



TYPICAL KNOCKOUT

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. MATES WITH: ULTRA-LOCK FEMALE CORD ASSY
4. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 250V AC/DC
CURRENT RATING: 4 AMPS
5. ASSEMBLY IS RoHS COMPLIANT

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	POTTING MATERIAL	EPDXY	
5	1	PANEL NUT, M16 X 1.5	CU ALLOY	NICKEL PLATED
4	1	O-RING	NITRILE	BLACK
3	4	PIN CONTACT	CU ALLOY	GOLD PLATED
2	1	INSERT	NYLON	BLACK
1	1	RECEPTACLE SHELL	BRASS	NICKEL PLATED

SD RELEASE EC NO: WEL2010-0046 DRWN: VOU 8/28/09 CHKD: BWOODMAN2009/08/31 APPR: JFMURPHY 2009/08/31	QUALITY SYMBOLS	DESCRIPTION
	 = 0	
	 = 0	
1	REV	

mm	INCH
4 PLACES	±----
3 PLACES	±---- ±.005
2 PLACES	±---- ±.010
1 PLACE	±---- ±.020
ANGULAR ±1°	

DRAWN BY VOU	DATE 2009/08/28
CHECKED BY BWOODMAN	DATE 2009/08/31
APPROVED BY JFMURPHY	DATE 2009/08/28
MATERIAL NO. SEE CHART	
SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE 1:1		DESIGN UNITS INCH		 THIRD ANGLE PROJECTION	
TITLE ULTRA-LOCK RECPT BPM M16 MALE 4P M12 A-CODE PCB MOUNT					
 MOLEX INCORPORATED					
DOCUMENT NO. SD-120084-007					SHEET NO. 1 OF 1