

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	08/01/13	
A		UPDATED SPEC.	7/20/15	HR/AY
B		UPDATE DRAWING	9/13/18	AY/DH

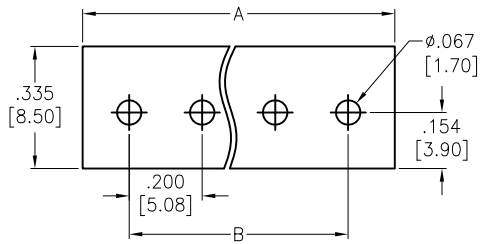


RECOMMENDED PCB LAYOUT

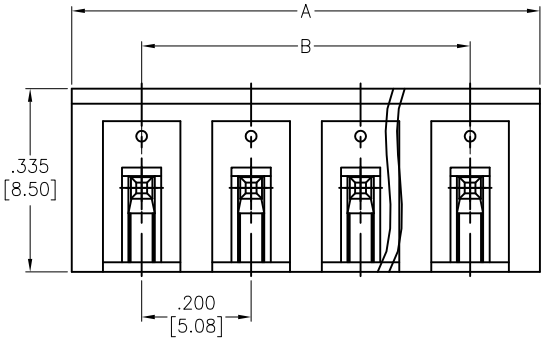

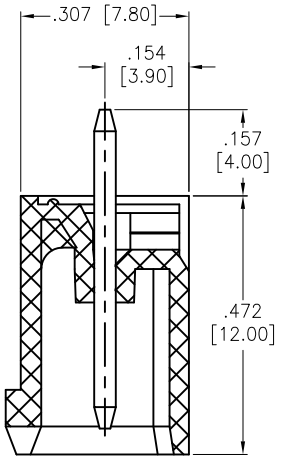

SECTION A–A

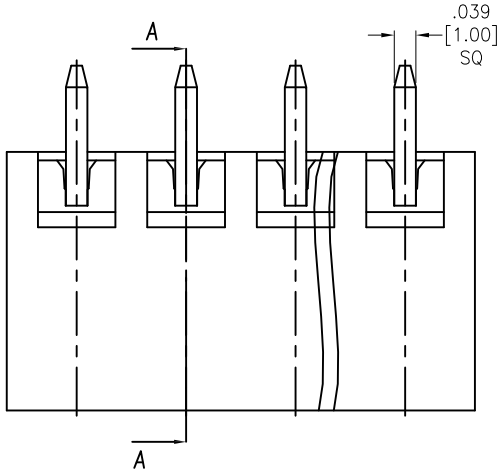

Positions: 02 thru 24

A = .200 [5.08] x No. of Positions + .055 [1.40]

B = .200 [5.08] x No. of Spaces

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V–0

Insulator color: Green

Contact: Brass, Tin plated.

Electrical:

Voltage rated: 300 VAC

Current rated: 15 Amp

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Temperature Rating:

–40°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	10/17/13
CHECKED	NP	10/17/13
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

TERMINAL BLOCK, SOCKETS .200 [5.08] PITCH VERTICAL, CLOSE TYPE

SIZE	PART NO.	REV.
X	EBPA-XX-D-C	B

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1