

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V3-355

CK-D3400

V3-355

PAGE 1 OF 1

REPLACES X64169-V3

RELEASE NO. PR-5787

M

DRAWING
NUMBER

27

84

84

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

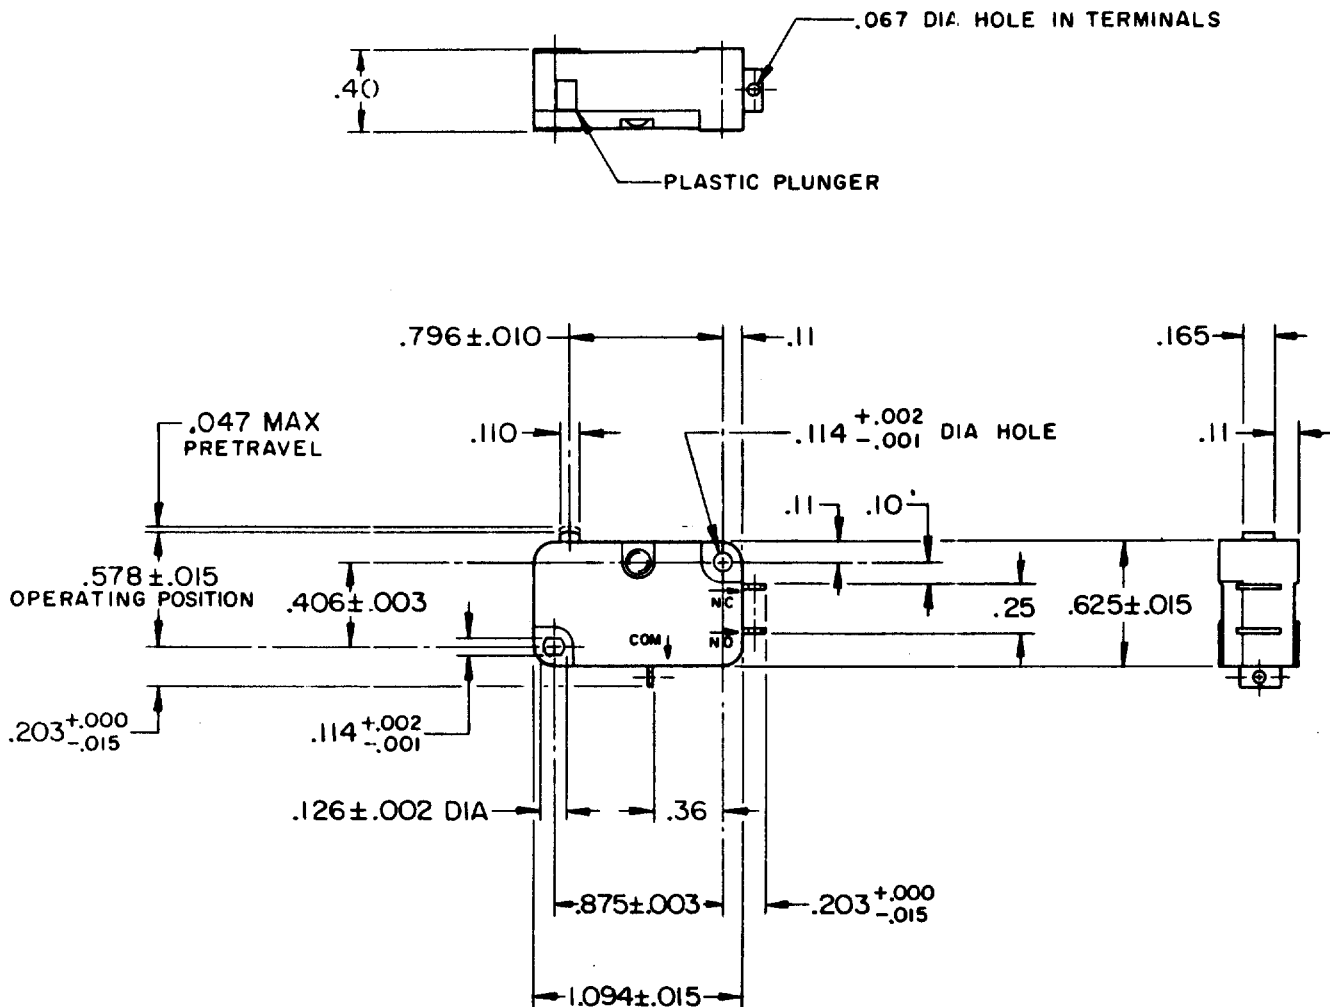


NOTES

- 1 - TERMINALS ARE PLATED FOR SOLDERING
- 2 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 3 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ——— 8 OZ MAX

RELEASE FORCE ——— 2 OZ MIN

DIFFERENTIAL TRAVEL ——.006—.016

OVERTRAVEL ——— .040 MIN

FREE POSITION ——— .625 MAX

RELEASE TRAVEL ——— .007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156 11A-1/3HP-125, 250, 277VAC
1/2A-125VDC; 1/4A-250VDC
4A-125VAC "L"



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	X X
ONE PLACE	X.X	0.4/016	X.X
TWO PLACES	X.XX	0.15/006	X.XX
THREE PLACES	X.XXX	0.01/001	X.XXX
ANGLES			

SI METRIC
DESIGN UNITS ☐

US CUSTOMARY
☒

WEIGHT .016 LB

FORMTEK

DRAWN

APR 12 1976

APR 13 1976