

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/13	


APPROVED: _____


DATE: _____ TITLE: _____

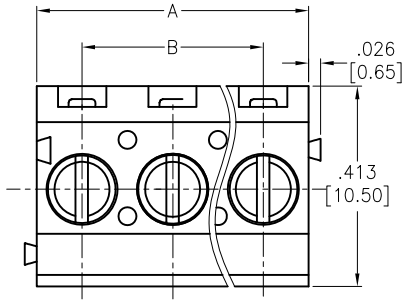

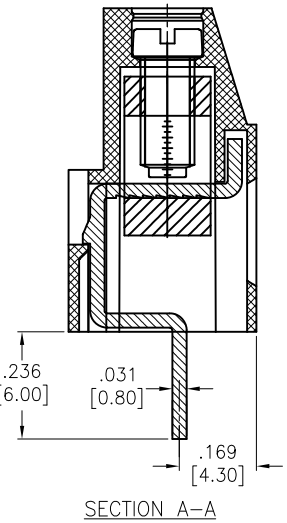

SECTION A–A

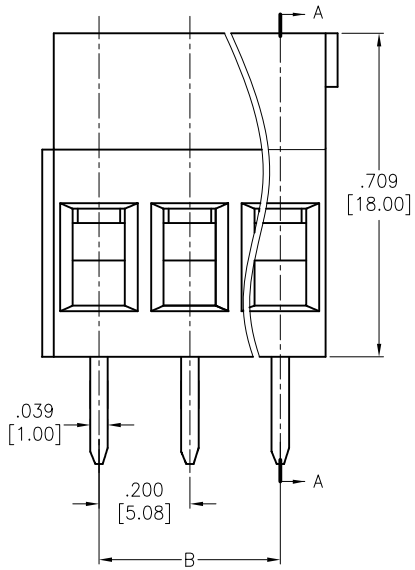

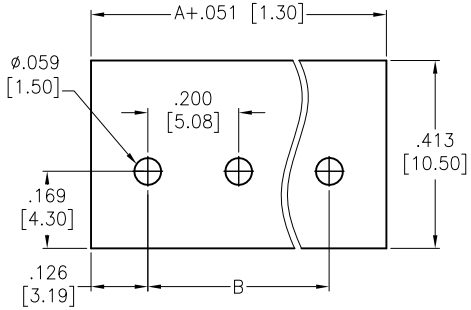

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Screw: Steel, M3.0/Zinc plated
Cage: Brass, Nickel plated
Pin Header: Brass, Tin plated
Electrical:
Voltage rated: 300 VAC
Current rated: 16 Amps
Contact resistance: 20 mΩ
Insulation resistance: 500 MΩ @ 500 VDC
Withstanding valtage: 2000V AC/1 Min
Mechanical:
Solid wire: 26–12AWG 2.5mm²
Torque (Lb–In): 0.5Nm (4.5lb–in)
Strip length: 6–7mm
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 24
A= .200 [5.08] x No. of Positions
B= .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/9/14
CHECKED	SY	7/9/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .200 [5.08] PITCH

SIZE	PART NO.	REV.
X	EB147A-XX-D	-

REF: S00067C | SCALE: NTS | SHEET 1 OF 1