
MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
V3-3015

CK-X3270

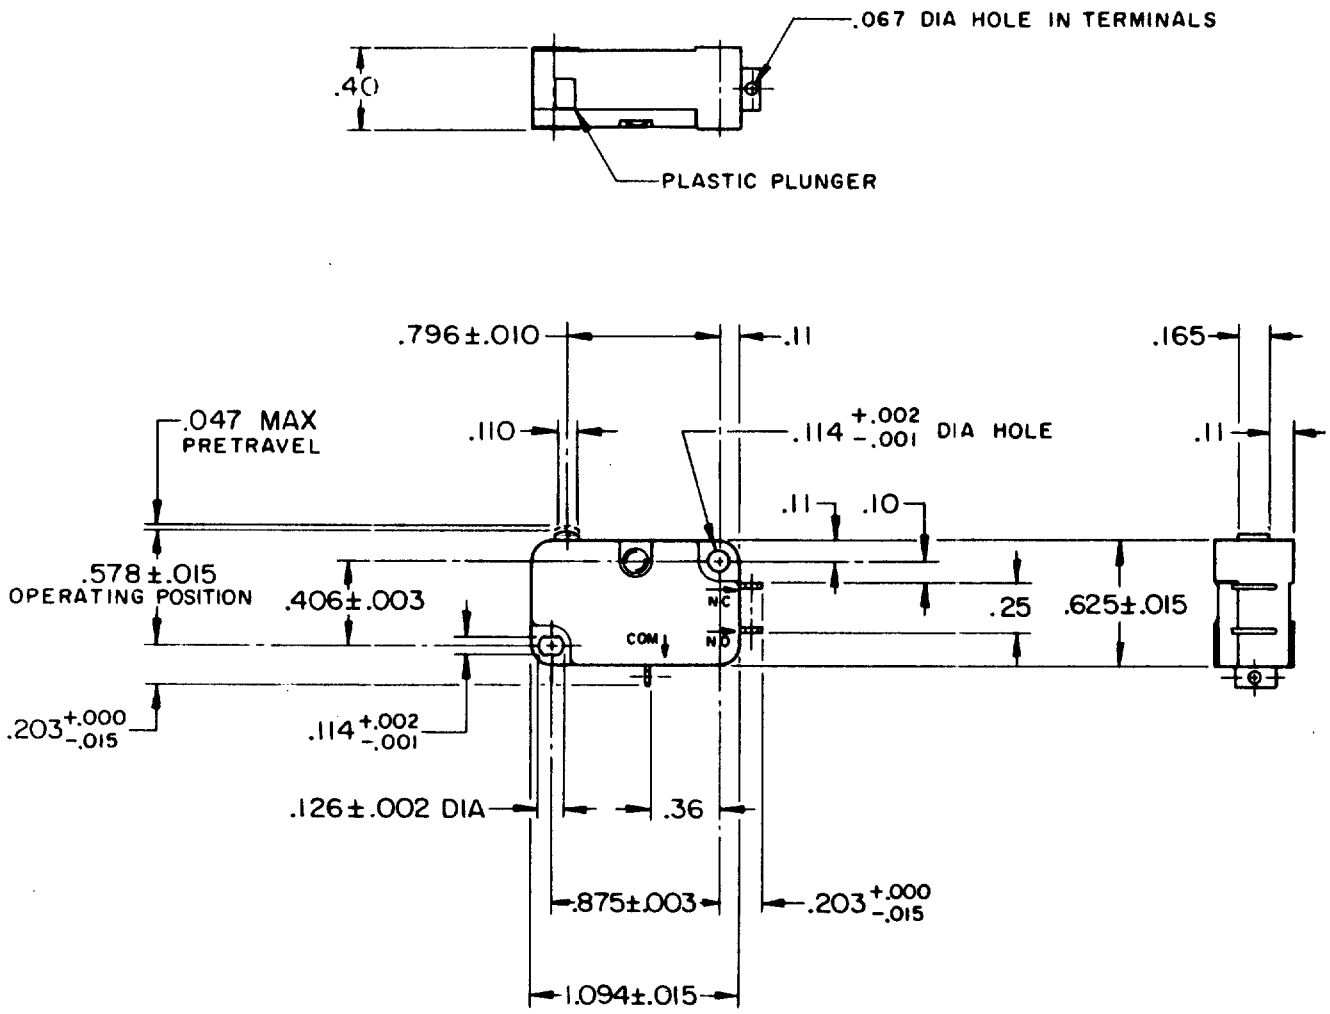

NOTE-
1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE - - - 150 GRAM MAX
RELEASE TRAVEL - - - - - - - - .010 MIN
RELEASE FORCE - - - - 15 GRAM MIN
DIFFERENTIAL TRAVEL - - - .002-.010
OVERTRAVEL - - - - - - - .050 MIN
FREE POSITION - - - - - - .625 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L83
15.1A 1/2HP 125 OR 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.006	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

SI METRIC ☐ US CUSTOMARY ■

DESIGN UNITS

WEIGHT

V3-3015 — RELEASE NO. PR-5823 — REPLACES

DRAWING NUMBER: M

ISSUE: X 5 / X 6

REVISIONS

A	CO 38059	GLH 3 FEB 77
B	C055729	KEW 28 AUG 84
C	CO 56987	SMA 1 OCT 85
D	C076103	LJF 4 OCT 93

CHECK

22 APRIL 76 C E B

CHECK

CHECK

22 APR 76 GLH DRAWN

FO-52848-A