

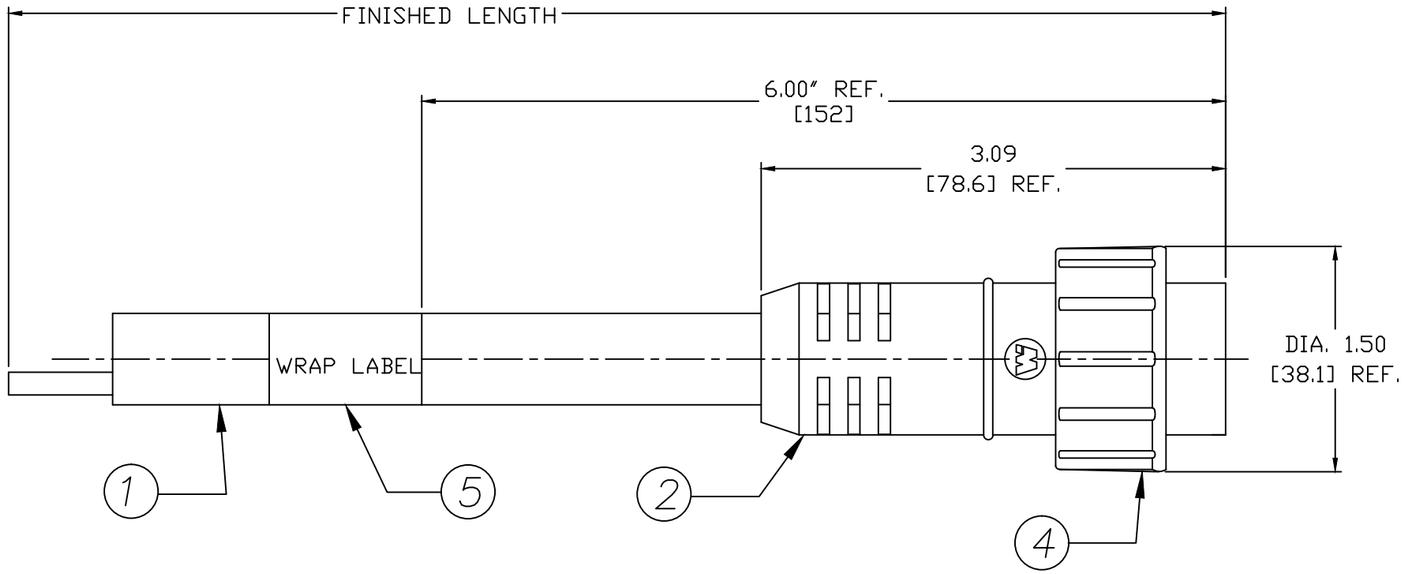



FACE VIEW-FEMALE INSERT

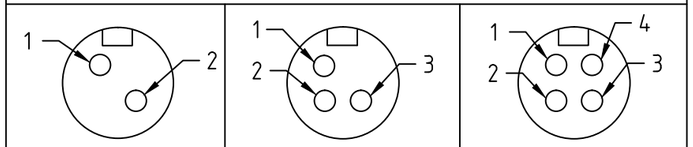


| 1 BLACK<br>2 WHITE | 1 BLACK<br>2 WHITE<br>3 GREEN | 1 BLACK<br>2 GREEN<br>3 RED<br>4 WHITE |
|---|---|---|

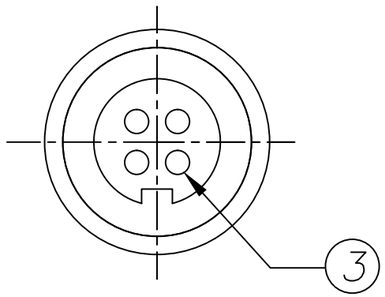


CONNECTOR
SPECIFICATION:

| | |
|---|---|
| VOLTAGE RATING | 600V AC/DC |
| AMPERAGE RATING | 2P: 18 AMPS, 3P: 18 AMPS, 4P: 15 AMPS |
| PROTECTION | IP67 |
| OPERATING TEMP. | -20°C TO 105°C |
| UL CERTIFICATIONS | UL RECOGNIZED, FILE NO. E46237 |

| POLES | MATERIAL NO. | ENGINEERING NO. | FINISHED LENGTH |
|---|---|---|---|
| 4 | 1300000074 | 32638 | 6.0 FT. +2.19"-0 [183CM+56mm-0] |
| 4 | 1300000076 | 32639 | 12.0 FT. +3.50"-0 [366 CM +89mm-0] |

| ITEM | COMPONENT | MATERIAL | FINISH |
|---|---|---|---|
| 5 | LABEL | VINYL | YELLOW |
| 4 | COUPLING | THERMOPLASTIC | BLACK |
| 3 | CONTACT SOCKET | COPPER ALLOY | UN-PLATED |
| 2 | OVERMOLD | RUBBER | YELLOW |
| 1 | CABLE-14 AWG SOW | CPE JACKET | YELLOW |

RELEASED
EC NO: IPG2013-0663 2012/11/20
DRWN: RSTONE
CH'KD: K JOZWIK
APPR: JFMURPHY 2013/02/07
DESCRIPTION
REV: A

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ±--- | ±--- |
| 3 PLACES | ±--- | ±--- |
| 2 PLACES | ±--- | ±.01 |
| 1 PLACE | ±0.3 | ±--- |
| ANGULAR ±2° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: INCH/MM
SCALE: ---
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: RSTONE DATE: 2012/11/20
CHECKED BY: K JOZWIK DATE: 2012/11/28
APPROVED BY: JFMURPHY DATE: 2013/02/07

TITLE: QUICK CHANGE CABLE ASSY 2-4P FEMALE, 14 AWG ----

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-130000-004
SHEET NO.: 1 OF 1

SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION