
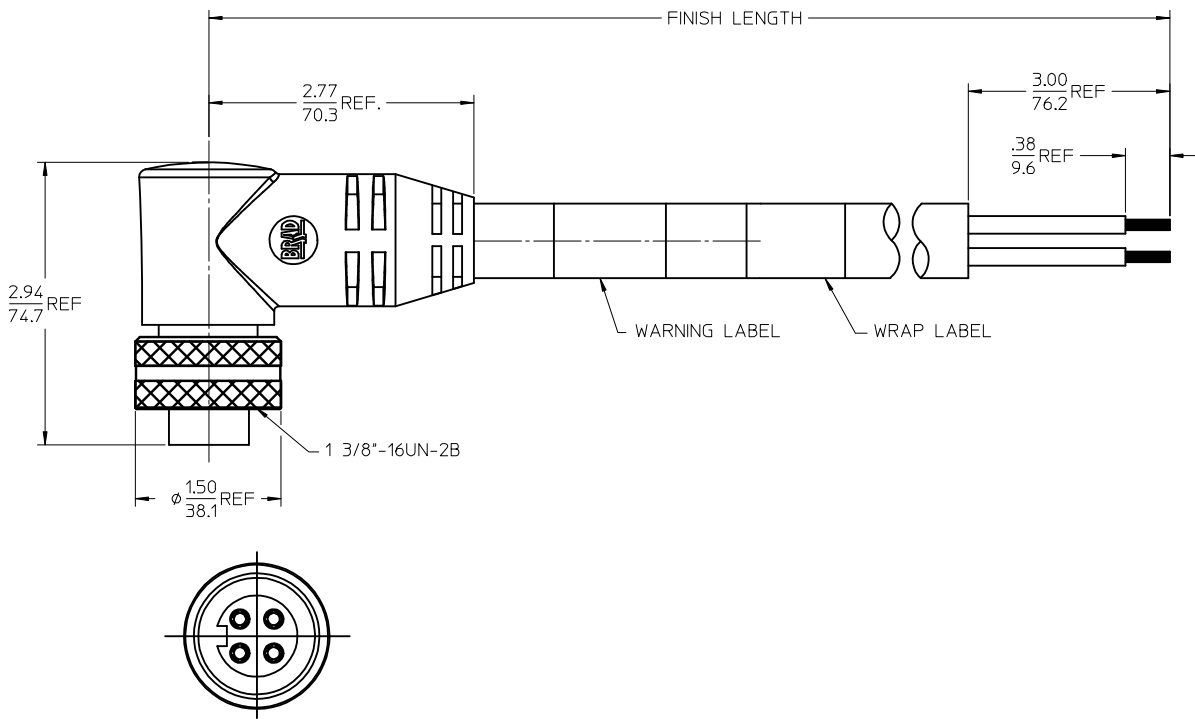


13	12	11	10	9	8	7	6	5	4	3	1
----	----	----	----	---	---	---	---	---	---	---	---

POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300630037	C03001A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300630135	C04001A48M020	32	2M +89-0MM (6'7"+3.50-0)

FACE VIEW-FEMALE INSERT
3 POLE 4 POLE

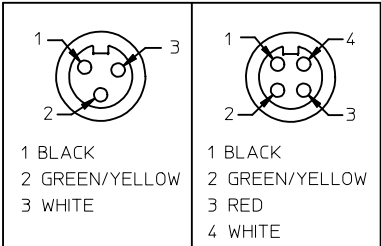

SPECS:
OVERMOLD: GRAY PVC
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & ST00W
ELECTRICAL: 600V AC/DC

REV B	DESCRIPTION EC NO: IPG2014-1160 DRWNG:GUSTAFSON 2013/12/23 CHKD:VOU 2014/01/15 APPR:BMWOODMAN 2014/05/12	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .010 1 PLACE ± 0.25 ± .020 ANGULAR ± 1/2°	DIMENSION STYLE IN/MM DRAWN BY B.RUPERT DATE 01/12/2010 CHECKED BY B.WOODMAN DATE 01/12/2010 APPROVED BY JFMURPHY DATE 2010/01/15	SCALE 1:2	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE QUICK CHANGE FEMALE 90 DEGREE 3 & 4 POLE PORTABLES	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-130063-037		SHEET NO. 1 OF 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
		MATERIAL NO. SD-130063-037							
		SHEET NO. 1 OF 1							

12	11	10	9	8	7	6	5	4	3	2	1
----	----	----	---	---	---	---	---	---	---	---	---