


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00130	Connector, dc plug, 5.5x2.5xL22.5 mm, molding style, brass nickel plated	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00043	Overmold, PVC, black	1	

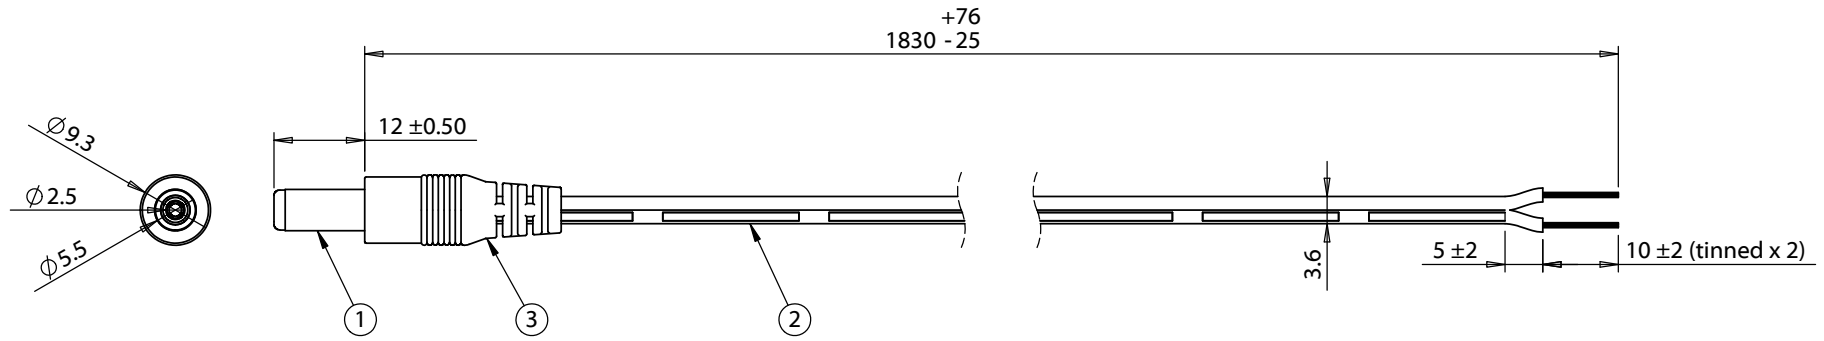

Wiring Diagram	
50-00130	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	1/19/2009	Re-issue CUI spec as Tensility	GL 2016.03.10 09:32:14 -08'00'		
A1	1/15/2009	Updated tolerances	Verified:	Function test: no open, no short circuit, no intermittent	Size: Part number: A 053-0183R (CA-2184)
A2	8/30/2011	Updated description, connector, and wire information	LA <small>Digitally signed by LA DN: cn=L.A. GARDNER, ou=Engineering, o=Tensility.com, LLC, email=L.A.GARDNER@TENSILITY.COM, c=US</small>		
A3	1/9/2014	Updated description	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 5.5x2.5x12 mm, 50-00130 dc plug to stripped tinned, 24 AWG, 30-00003 wire	Scale: 1:1
					Sheet 1 of 1