

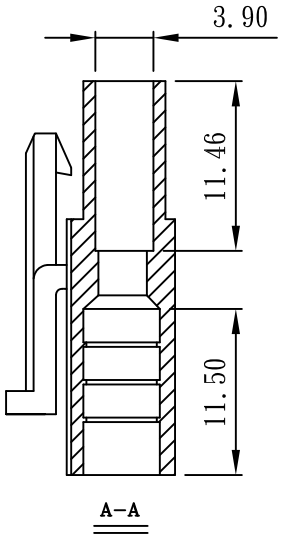

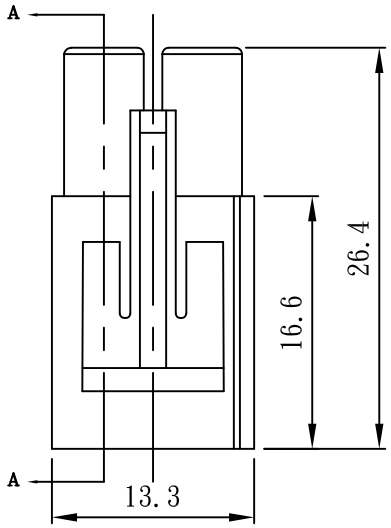

Specifications:

Poles: 2 Poles
Pitch Between Poles: 6.2mm
Current Rating: 5A
Voltage Rating: 250V AC,DC
Temperature Range: −25℃ ~ +85℃
Contact Resistance: Initial value/10mΩ max
After environmental testing/20mΩ
Withstand Voltage: 1500V AC/minute
Insulation Resistance: 1000 MΩ/min
Material: **Nylon UL94V−2**

RoHS Compliant

ON−SHORE TECHNOLOGY, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

APPD. Hedy	SCALE none	TOLERANCE .0 ± 0.25, .00 ± 0.13, ANG. ±	PART NAME 2.0mm MALE HOUSING 1*2P W/LOCKING RIBS WHITE COLOR LOW-LEAD
DWG. Yumi	UNIT M M	SIZE.	
DATE 2009/07/15	PAGE 1 OF 1	REV. A	PART NO. 700H102W