


114030A05MXXX

LENGTH

010 - 1M
050 - 5M
200 - 20M

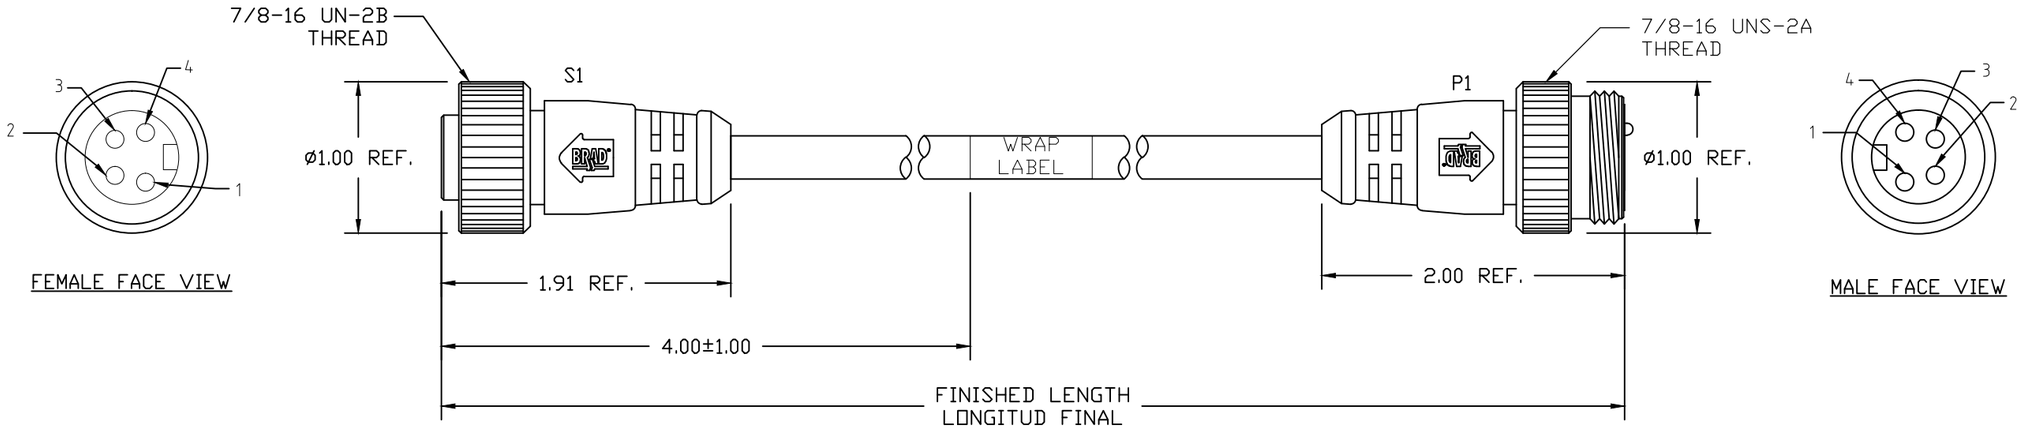

WIRING DIAGRAM

NOTES:

MECHANICAL
CONTACT : GOLD/NICKEL OVER COPPER ALLOY
INSERT : YELLOW PVC
COUPLING NUT: BLACK ELECTROPHORETIC COATING OVER ZINC DIECAST
MOLDED BODY: YELLOW PVC
CABLE: 18 AWG 4 CONDUCTORS YELLOW PVC JACKET
WRAP LABEL: YELLOW VINYL

ELECTRICAL
VOLTAGE RATING: 300V AC/DC
AMPERAGE: 7A

ENVIRONMENTAL
OPERATION TEMP: 80°C

REV	DESCRIPTION
A	INITIAL RELEASE EC NO: IPG2013-1205 DRWN: BARDEN 2013/02/06 CHKD: TWOLDEGE APPR: JFMURPHY 2013/06/21

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±0.13	±.010
1 PLACE	±0.25	±.020
ANGULAR ±.5°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: INCH ONLY
SCALE: NTS
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: BARDEN DATE: 2013/02/06
CHECKED BY: TWOLDEGE DATE: 2013/02/15
APPROVED BY: JFMURPHY DATE: 2013/06/21
MATERIAL NO.: ---

TITLE: MINI CHANGE ASSEMBLY
4 POLE MALE/FEMALE ST/ST
18/4C AWG PVC YELLOW

molex MOLEX INCORPORATED

DOCUMENT NO.: SD-130010-026
SHEET NO.: 1 OF 1
SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION