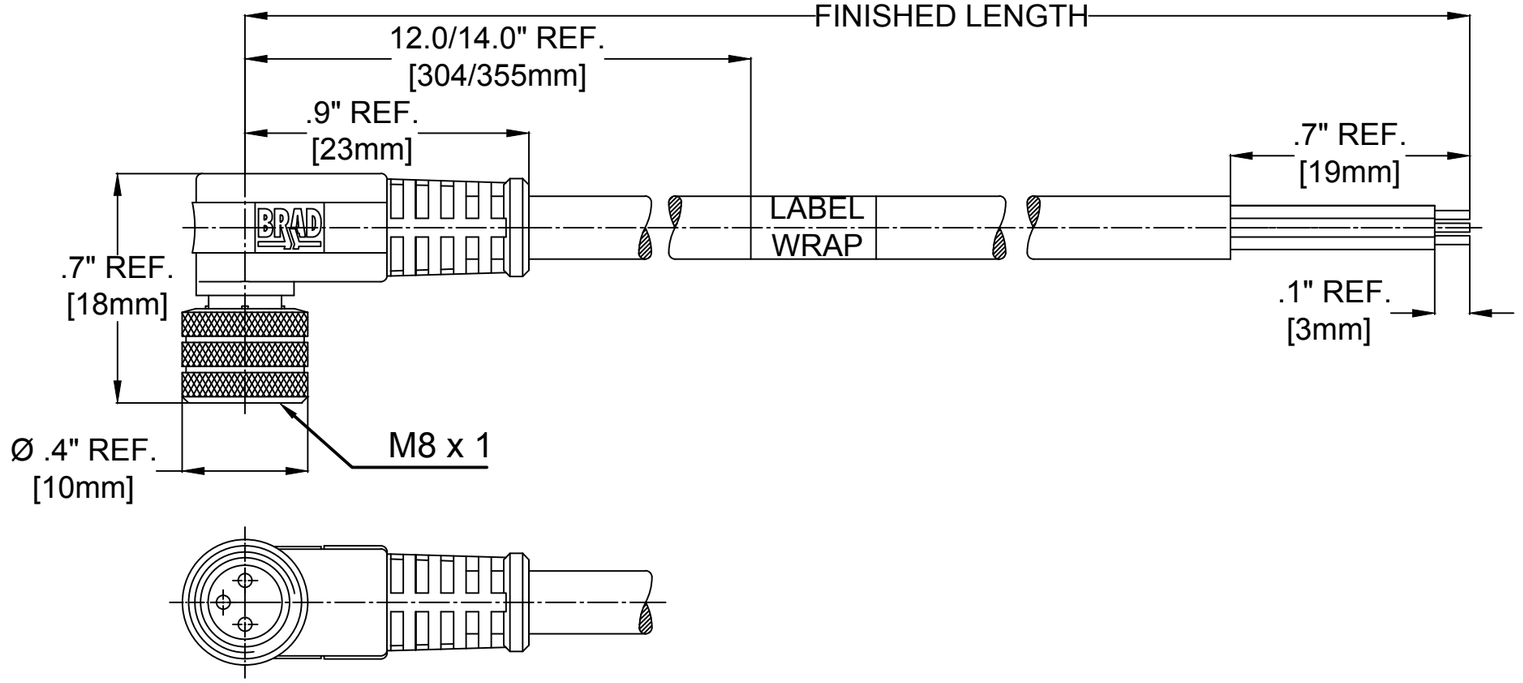





FEMALE FACE VIEW		
3-POLE	4-POLE	5-POLE
		
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

403001A10M020

- No Pole / 3-5 Pole
- cable type: #24/3-5 PVC YELLOW
- cable length: 020----2 Meters; 100----10 Meters

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGHT IN/MM
1200860119	403001A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200860122	403001A10M050	16.40' +6.50" -0 [5.0M +165.1 -0]
1200860124	403001A10M100	32.81' +12.50" -0 [10.0M +317.5 -0]
1200860175	404001A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200860178	404001A10M050	16.40' +6.50" -0 [5.0M +165.1 -0]
1200860180	404001A10M100	32.81' +12.50" -0 [10.0M +317.5 -0]
1200860200	405001A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200890092	405001A10M100	32.81' +12.50" -0 [10.0M +317.5 -0]

SPECIFICATION DATA

COMPONENT	MATERIAL	FINISH
LABEL	MYLAR	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
CONTACT	COPPER ALLOY	Au OVER Ni
O-RING	VITON	RED
INSERT	PUR	BLACK
OVERMOLD	TPE	YELLOW
CABLE #24 /3-5	PVC	YELLOW
VOLTAGE RATING:		3-4POL:60V/AC 75V/DC 5-POL: 30V/AC 36V/DC
AMPERAGE RATING:		3A
PROTECTION CLASS:		IP 68
OPERATING TEMPERATURE:		-20°C / 105°C

UPDATED FOR PART NUMBER MATRIX
EC NO: IPG2014-0989 — DRWN: GGUSTAFS 11/27/13 — CH'KD: BARDEN ---- — APPR: BWOODMAN 2010/01/28
DESCRIPTION
REV 2

QUALITY SYMBOLS
▼ = 0
Ⓒ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±.13	±.010
1 PLACE	±.25	±.020
ANGULAR ±	.5 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: NTS
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION


DRAWN BY: RE — DATE: 2010/01/20
CHECKED BY: FP — DATE: 2010/01/20
APPROVED BY: NSTAUDIG — DATE: 2010/01/28




NC 3/4/5P FE 90
24AWG PVC

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-120086-026
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

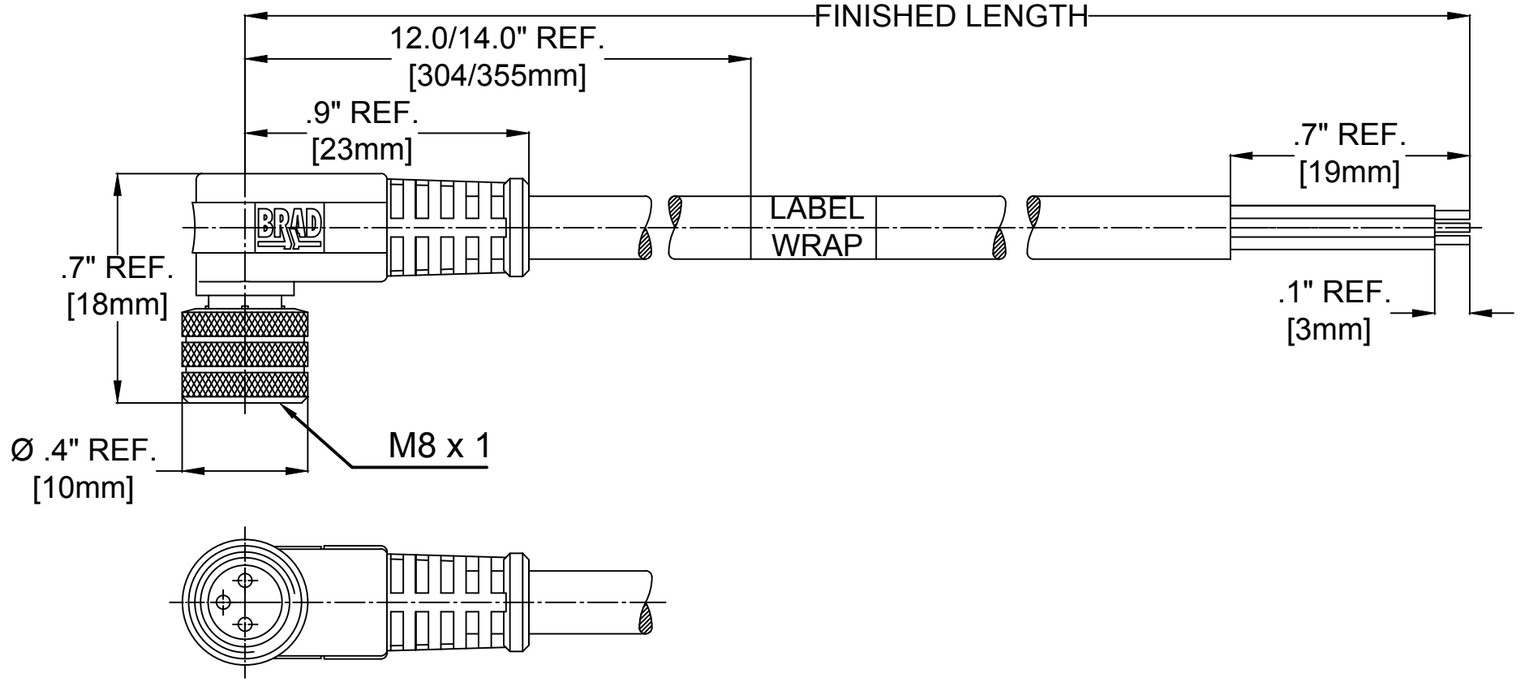

FEMALE FACE VIEW		
3-POLE	4-POLE	5-POLE
		
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

403001A10M020

- No Pole / 3-5 Pole
- cable type: #24/3-5 PVC YELLOW
- cable length: 020----2 Meters; 100----10 Meters

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGHT IN/MM
1200860119	403001A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200860122	403001A10M050	16.40' +6.50" -0 [5.0M +165.1 -0]
1200860124	403001A10M100	32.81' +12.50" -0 [10.0M +317.5 -0]
1200860175	404001A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200860178	404001A10M050	16.40' +6.50" -0 [5.0M +165.1 -0]
1200860180	404001A10M100	32.81' +12.50" -0 [10.0M +317.5 -0]
1200860200	405001A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200890092	405001A10M100	32.81' +12.50" -0 [10.0M +317.5 -0]

SPECIFICATION DATA

COMPONENT	MATERIAL	FINISH
LABEL	MYLAR	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
CONTACT	COPPER ALLOY	Au OVER Ni
O-RING	VITON	RED
INSERT	PUR	BLACK
OVERMOLD	TPE	YELLOW
CABLE #24 /3-5	PVC	YELLOW
VOLTAGE RATING:		3-4POL:60V/AC 75V/DC 5-POL: 30V/AC 36V/DC
AMPERAGE RATING:		3A
PROTECTION CLASS:		IP 68
OPERATING TEMPERATURE:		-20°C / 105°C

UPDATED FOR PART NUMBER MATRIX
EC NO: IPG2014-0989 — DRWN: GGUSTAFS 11/27/13 — CH'KD: BARDEN ---- — APPR: BWOODMAN 2010/01/28
DESCRIPTION
REV 2

QUALITY SYMBOLS
▼ = 0
Ⓒ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±.13	±.010
1 PLACE	±.25	±.020
ANGULAR ±	.5 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: NTS
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: RE — DATE: 2010/01/20
CHECKED BY: FP — DATE: 2010/01/20
APPROVED BY: NSTAUDIG — DATE: 2010/01/28

NC 3/4/5P FE 90
24AWG PVC

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-120086-026
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION