

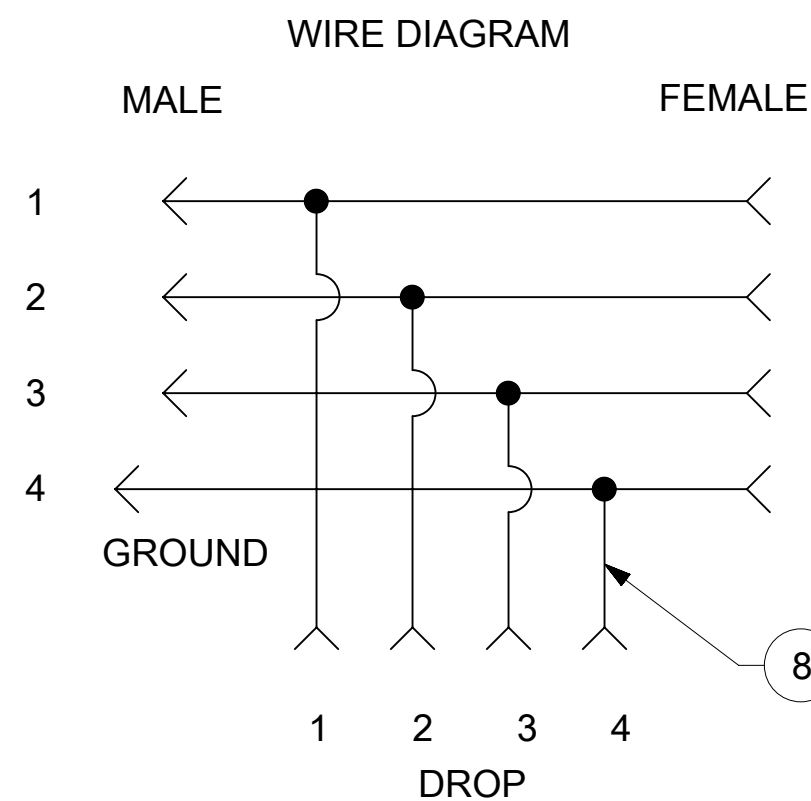
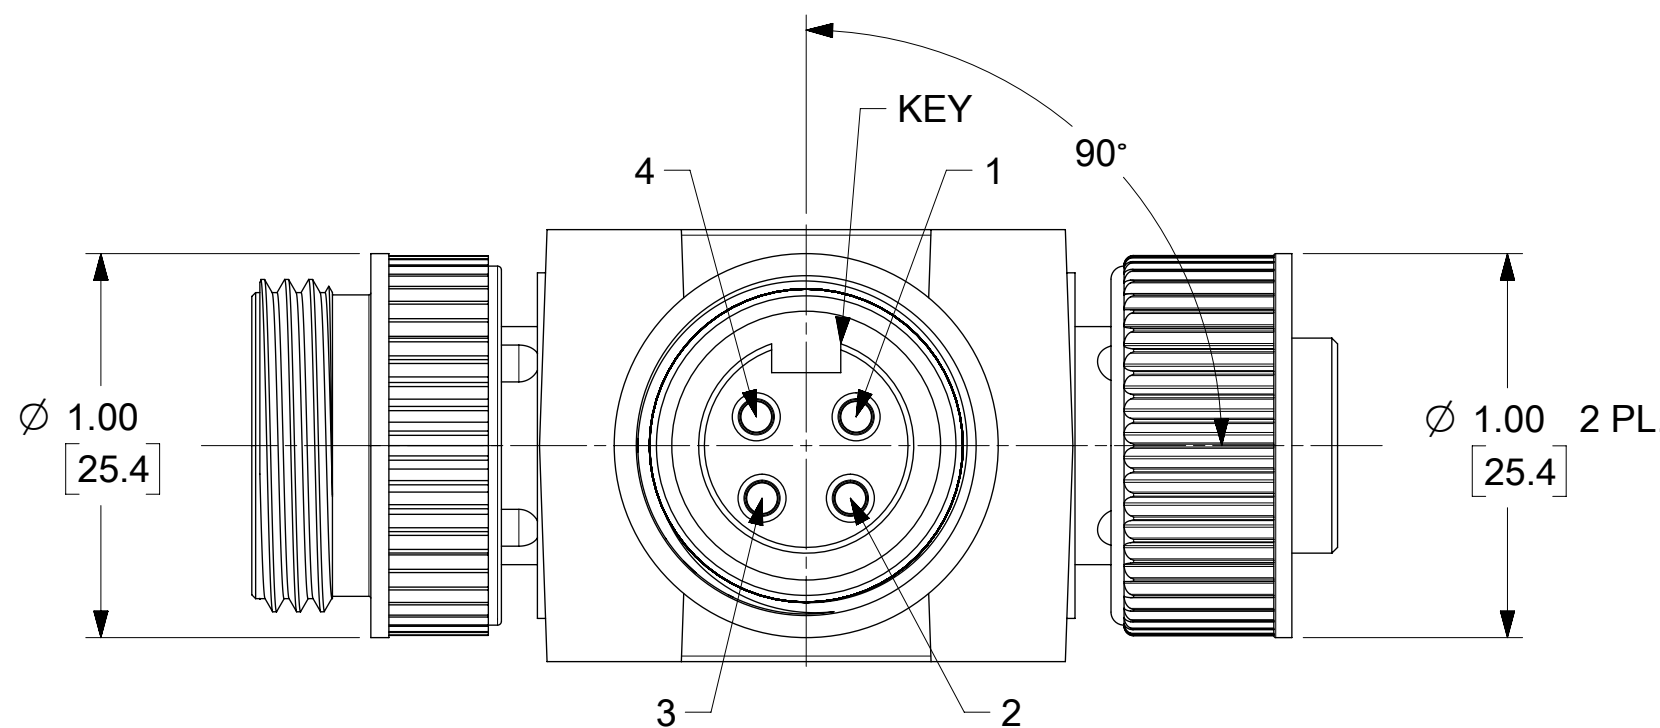
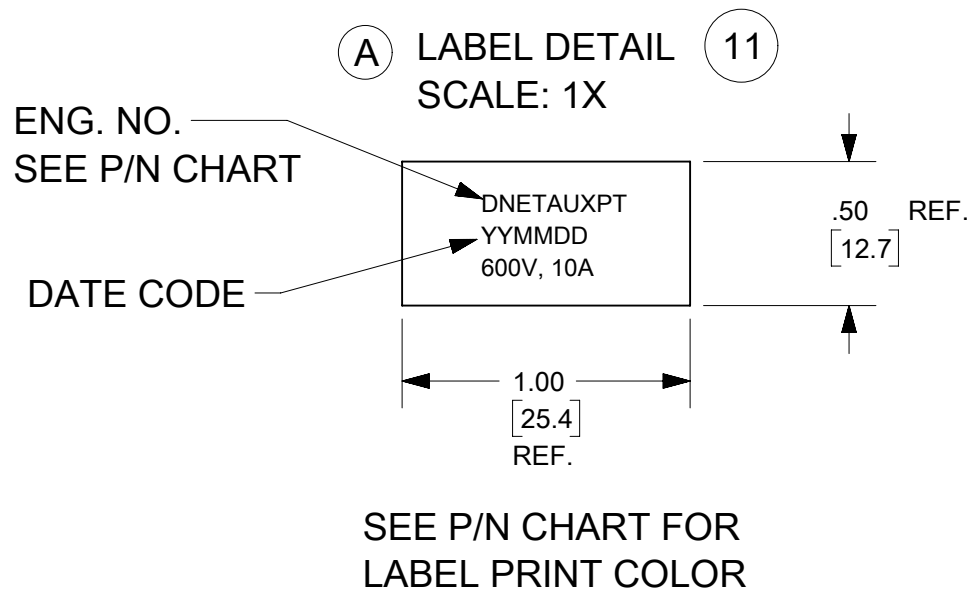
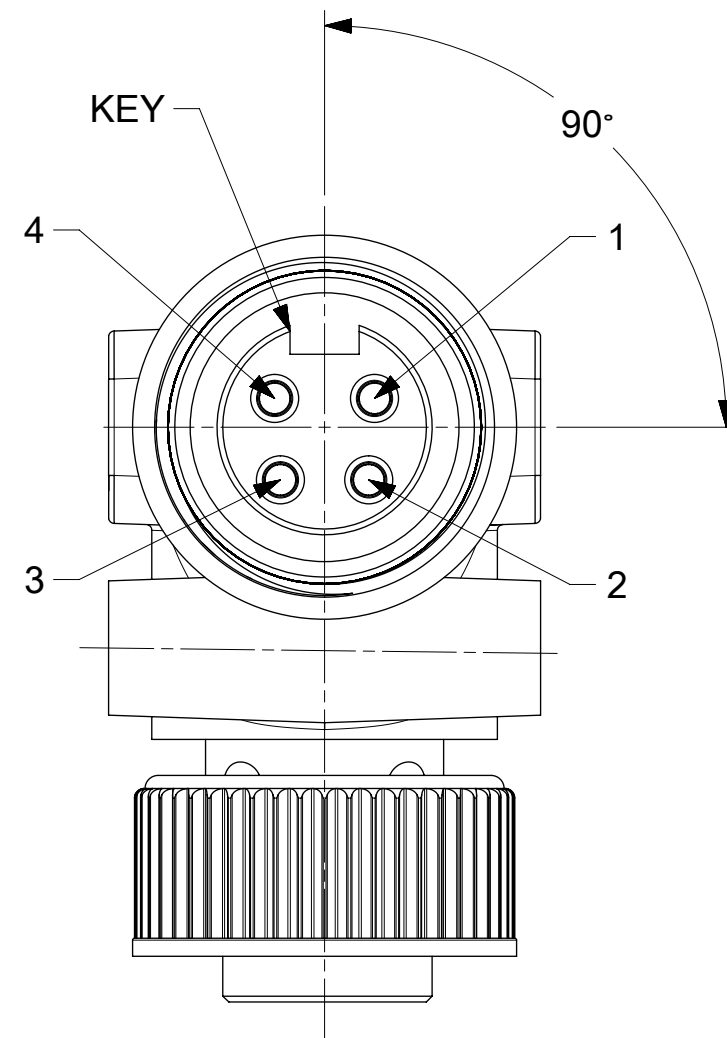
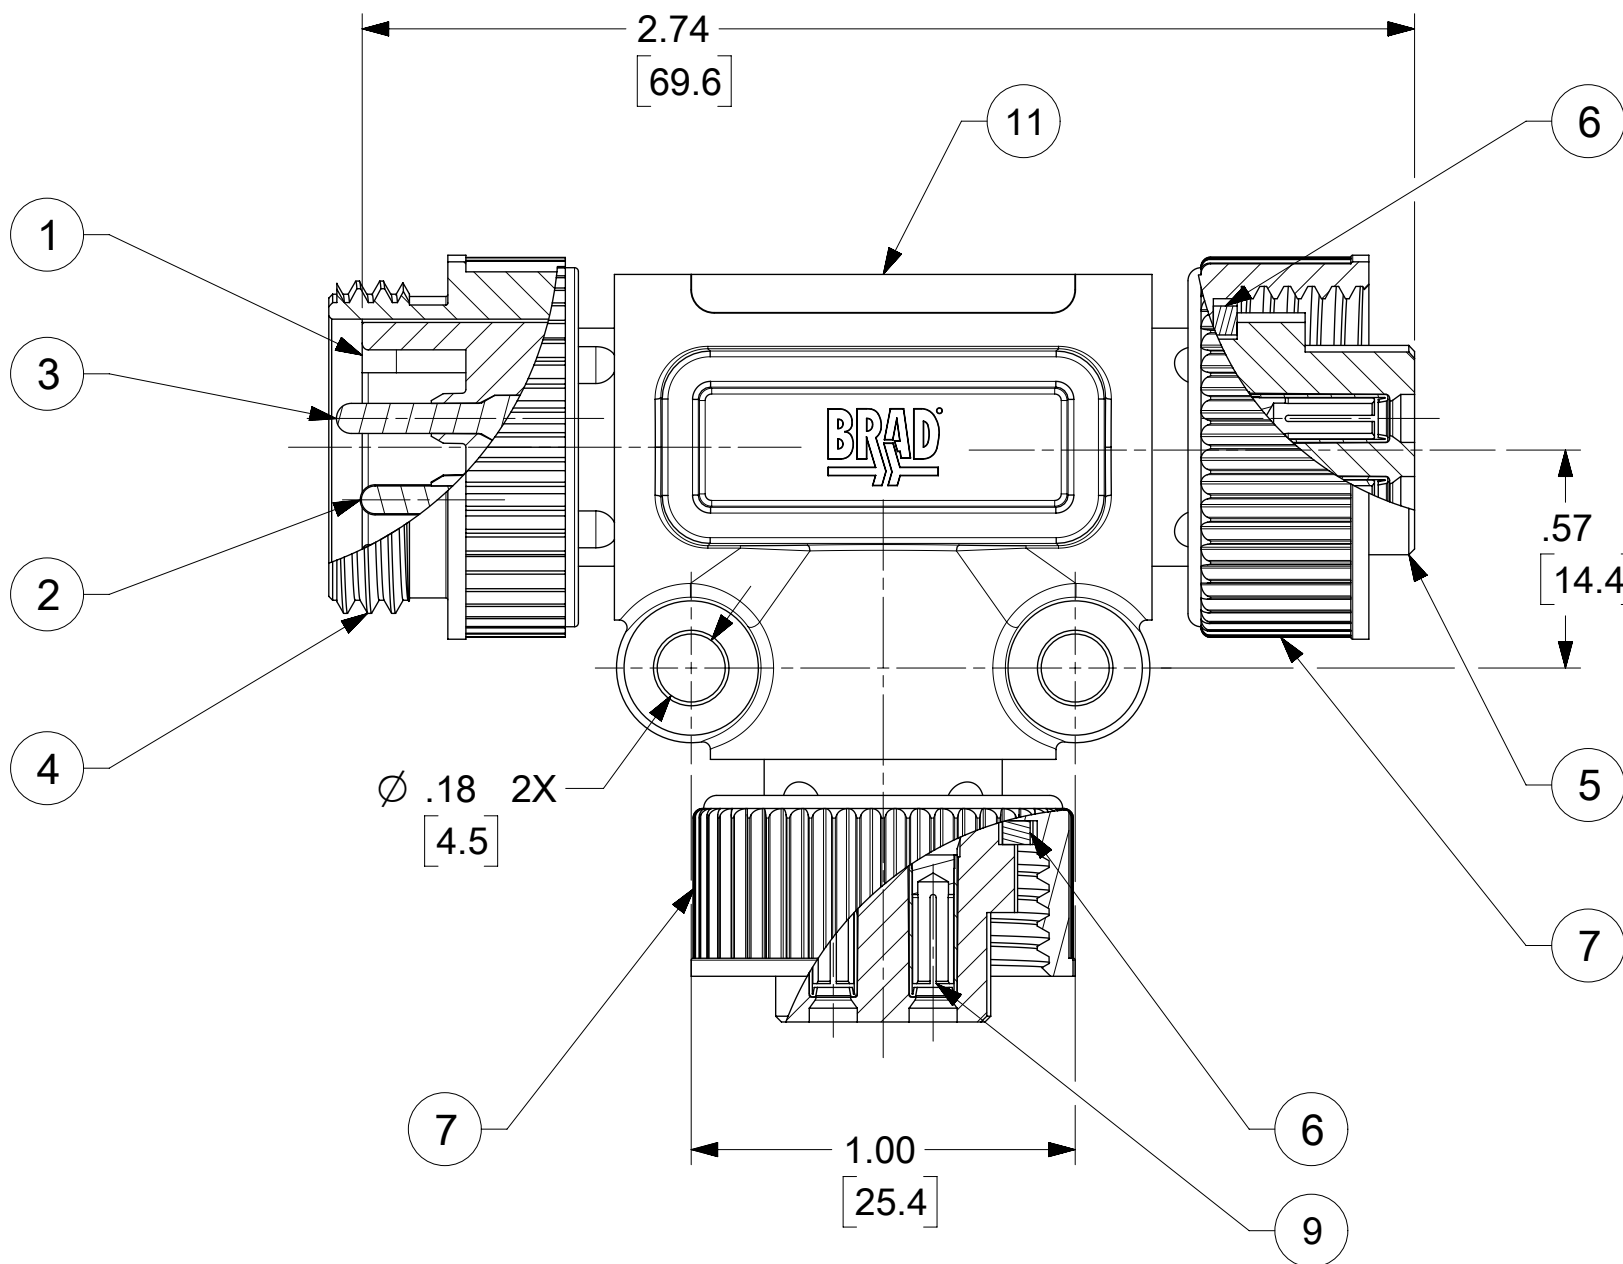


A REF. THIS DOC SUPERSEDES A-CAD DOC SD-130035-014 REV-B

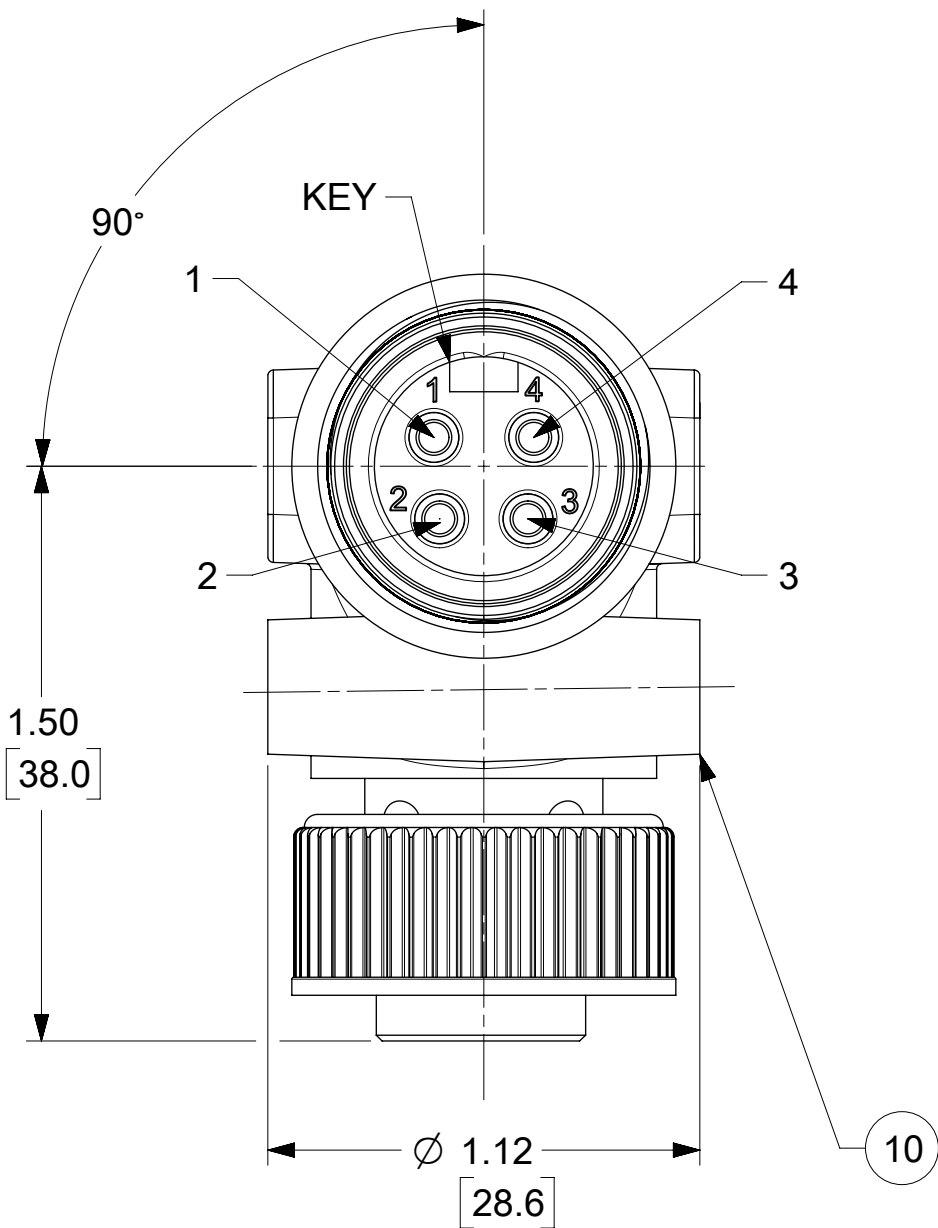

11	ID LABEL	POLYPROPYLENE	CLEAR, (LABEL DETAIL)
10	OVERMOLD	TPE	SEE P/N CHART
9	SOCKET CONTACT	Cu ALLOY	GOLD PLATED
8	WIRE, 18AWG (UL1015)	PVC INSULATION	SEE FACE VIEWS
7	FEMALE COUPLING	ZINC DIE-CAST	BLACK E-COAT
6	FRICTION RING	NYLON	WHITE
5	FEMALE INSERT	TPE	SEE P/N CHART
4	MALE COUPLING	ZINC DIE-CAST	BLACK E-COAT
3	M/F CONTACT (GROUND)	Cu ALLOY	GOLD PLATED
2	M/F CONTACT (SIGNAL)	Cu ALLOY	GOLD PLATED
1	MALE INSERT	TPE	SEE P/N CHART
ITEM	DESCRIPTION	MATERIAL	FINISH

- NOTES:
1. MATERIAL: AS NOTED
 2. FINISH: AS NOTED
 3. ELECTRICAL:
VOLTAGE: 483V PER IEC60664
600V PER UL2238
CURRENT: 10A
 4. TEMP RATING: -20°C TO +80°C
 5. PROTECTION: IP67 (WHEN MATED)
 6. COUPLING THREADS: 7/8-16UN
 7. UL LISTED FILE: E152210
 8. ALL DIMS ARE FOR REFERENCE UNLESS TOLERANCED OR NOTED OTHERWISE



1300350115	DNETAUXPTG	BLACK	WHITE
1300350085	DNETAUXPT	YELLOW	BLACK
PART NO.	ENG. NO.	O-MOLD & INSERT COLOR	LABEL PRINT COLOR

FUNCTIONAL SYMBOLS F/A = 0 F/C = 0 F/D = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: REDRAW TO NX, ADD BOM TABLE, UPDATE NOTES, REMOVE CENEL, ORIENT VIEWS TO MATCH MFG DOC	
	DIMENSION UNITS INCH	SCALE 2:1	GENERAL TOLERANCES (UNLESS SPECIFIED)	
		MM	INCH	
4 PLACES ±		±		
3 PLACES ±		±		
2 PLACES ±		±		
1 PLACE ±		±		
0 PLACES ±		±		
ANGULAR TOL ± °				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				
THIRD ANGLE PROJECTION		DRAWING C-SIZE	SERIES 130035	

EC NO: 701309		2022/03/14	
DRWN: RSTONE		2022/03/29	
CHK'D: MZIELINSKI		2022/04/11	
APPR: BWOODMAN			
INITIAL REVISION:			
DRWN: DRWN BY		0099/99/99	
APPR: APPR BY		0099/99/99	

DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
1300350085		PSD	000	A
MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
				1 OF 1