


## PICTURE



## DIMENSIONS

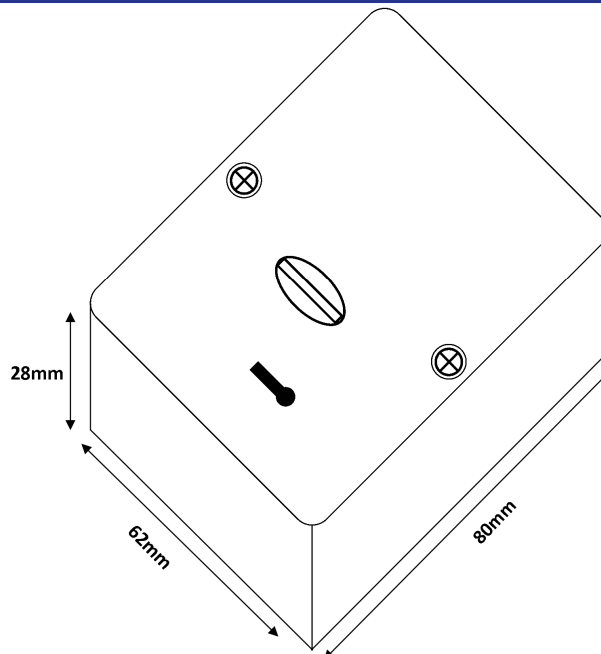

Drawings not to scale  
 All dimensions in mm nominal

## DETAILS

Protection against outside attack. The tactile tamper switch will trigger if the front cover is removed or if the unit is forcibly removed.

Coloured LED light shows the status of the controller.

Jumper links to select the appropriate resistor combination for various alarm panels.

Low power warning light.

Two independent outputs, Top button pair activate alarm A, side button pair activates alarm B.

### Features Include

- 4 Button operation with timer.
- Slim design access.
- Tamper switch protection.
- Easily resettable with rotation of key.

### Specifications

- BE EN50131-2-6 Approved.
- Grade 3.
- Slim curved design.
- Multiple cable entry points.
- Electronic operation with LED indicator

### Did you know we also sell?



Float Switches



Pressure Switches



Magnets



Proximity Switches



Reed Switches



Reed Relays



Solid State Relays

### Rev. No.

### Revision Note

### Date

### Signature

1

Datasheet

16-09-15

ML



ISO 9001:2008  
 Certificate No. FM21080

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236

www.comus-intl.com

Fax: +44 (0)1255 862014

©2015 Copyright Comus Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.  
 USA: Comus International: +1 973 777 6900, Belgium: Comus Belgium BVBA: +32 (0)12 390400