




UNIT:mm

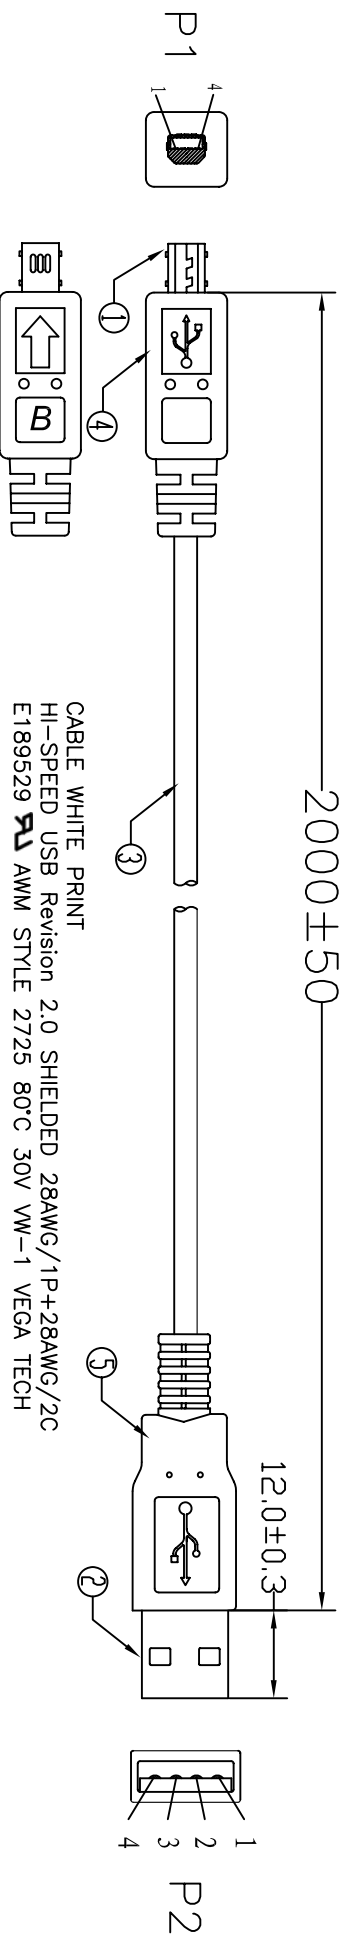

PIN ASSIGNMENT:

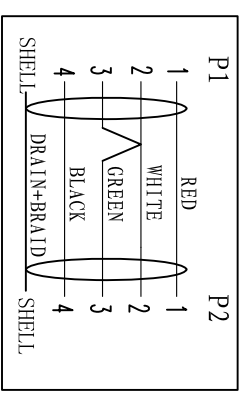

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V

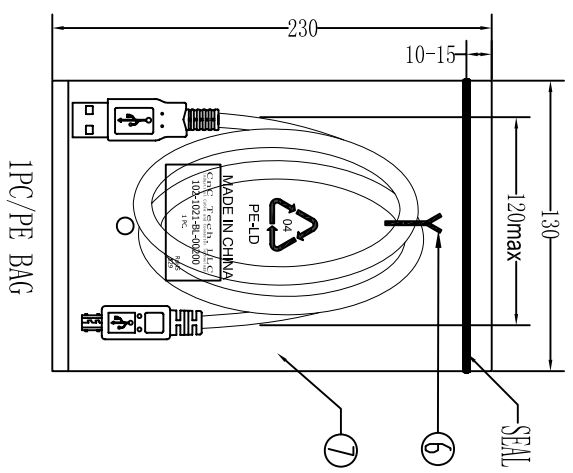

IPC/PE BAG

⑧	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm	PRINT BLACK"MADE IN CHINA"+ "10PCS"
⑦	PE BAG	1	CLEAR SIZE: 130*230*0.05mm	PRINT BLACK"MADE IN CHINA"
⑥	TIE	1	BLACK L=120mm	
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: MW-40)	
④	OUT JACKET	6g	BLACK PVC-40P	
③	CABLE	1	BLACK USB2.0 UI-2725 28#/1P+28#/2C+AEB OD: 3.8mm L=2000±15mm	
②	CONN	1set	USB A MALE	SHELL: NICKEL PIN: G/F 4PCS TYPE INSULATOR COLOR: WHITE
①	CONN	1set	MINI USB 4P B/M	PLUG SOLDER TYPE PLASTIC BLACK
NO.	NAME	Q'TY	SPECIFICATION	

Cnc Tech, LLC
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1021-BL-00200
DECIDED		DATE	2012-02-17
VERSIONS/EDITED	A/0	PROJECTION	