
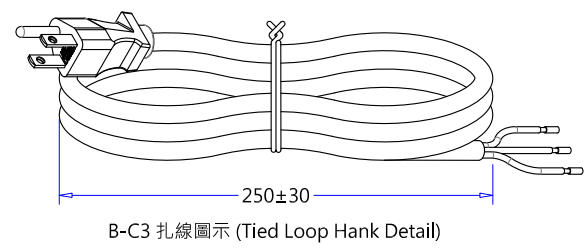
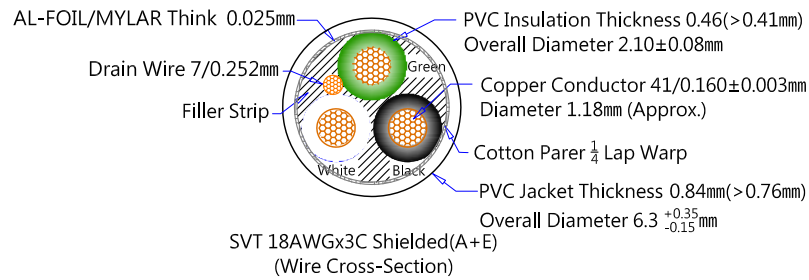



插頭部件 (Plug Component)			頭部剝皮尺寸 (Dimensions)			線材規格 (Wire Styls)	尾部剝皮尺寸 (Dimensions)			端子規格 (Termianl Style)	
顏色(Color)	零件描述(Component)	Qty.	內剝(Strip)	外剝(ROJ)	顏色(Color)	SVT 18AWGx3C (Shielded, A+E)	外剝(ROJ)	內剝(Strip)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)
35P 黑色 (Black)	ME-301 (NEMA 5-15P)	1	6 ⁺¹ ₋₀	22 ± 2	黑/Black(L)	105°C 黑色 (Black) Length : 3000±50 (118"±2")	50.8±5	6.35±3	黑/Black(L)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	φ4.75 圓管端子 (Earth Pins Terminal)	1	6 ⁺¹ ₋₀	22 ± 2	白/White(N)		50.8±5	6.35±3	白/White(N)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	6.3*1.5 單片圓頭端子 (Solid Blades)	2	6 ⁺¹ ₋₀	22 ± 2	綠/Green(E)		50.8±5	6.35±3	綠/Green(E)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
黑色 (Black)	301-1 兩件式內模 (301-1 Inner Body)	1									

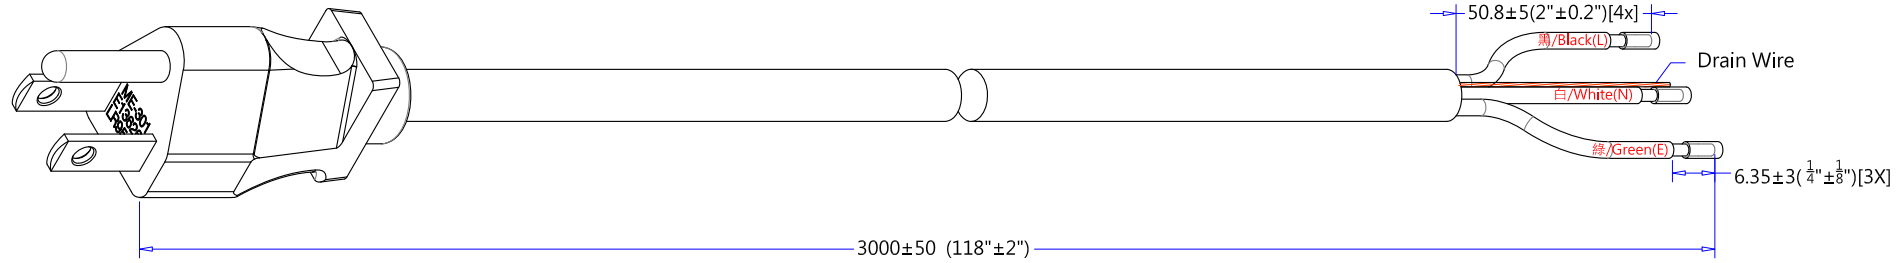

REV	DATE	REVISE CONTENT
A	08/30-2012	The first edition is issued and drawing.
F		

NOTE:
 1. Hi-Pot Test : 1500V/1Sec ; <0.5mA.
 2. Insulation Resistance Test : DC 500/min>100 meg-ohm.
 3. Continuity & Polarization Test : No short circuit, break circuit, displacement.
 4. Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
 5. Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
 6. All material according to Non-toxic standard.(Material must be RoHS compliant.)

線材印字 (Wire Printed)	充麻, 油墨印字 (Fillers, Printing Ink)			CnC Tech, LLC Industrial Cable and Connector Technology			
包裝方式 (Packing)		DRAWN		CUSTOMER			
Tied Hank	See Hank Detail	Chu8.					
Carton Size	480 x 320 x 180	DATE		P/N No. 800-1801-2-SVT0-BL-00300			
Pack Number	50 pcs/ UL Laster Labels	08/30-2012					
Carton Print	See Purchase Order	TYPE		MATERIAL			
		NEMA 5-15P to ROJ (S&R)Power Supply Cord		PVC UNIT mm			
DRAWING NO.	098MM1004	REV	A	Customer Approval			

業務校閱： 品質校閱：