
ADELS contact

IP66 Compact Unit

LCS 75/ 3

terminal block, 3 pole, housing hole diameter: M20, voltage rating: 250 V, current rating: 16.0 A, cross-section rating: 2.5 mm²

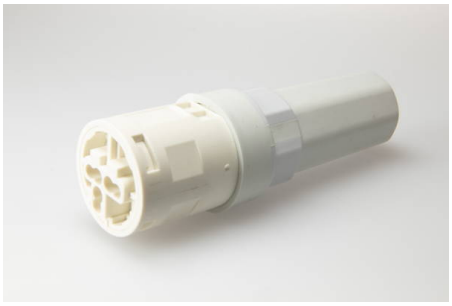

Order Info

reference number (ref. no.)	526203
PU	500
EAN	4028012124114

Type

type	terminal block
number of poles	3 pole
clamping units per pole	extern: 1 / intern: 2
colour	grey
cross-section rating	2.5 mm²
connection type	screwless
PE function	yes

Technical Data

voltage rating	250 V
current rating	16.0 A
insulating material	PA 6.6
contact material	Spring Steel, Copper
core cross-section min.	0.5 mm²
core cross-section max.	2.5 mm²
impulse voltage rating	2.0 kV
flammability rating	V-2
max. Ambient Temperature Operation	40 °C
IP code	IP66
dismantling length PE	69.0 mm
dismantling length	60.0 mm
cable diameter min.	7.5 mm
cable diameter max.	12.5 mm
wall thickness min.	0.5 mm
wall thickness max.	2.5 mm
housing hole diameter	M20
internal stripping length	12.0 mm

external stripping length	17.0 mm
tightening torque lock nut	0,7 Nm
tightening torque support sleeve	0,7 Nm
Type of Conductor Solid External	yes
Type of Conductor Flexible External	yes
Type of Conductor Stranded External	yes
Type of Conductor Solid Internal	yes
Type of Conductor Stranded Internal	yes

Approvals

acc. to EN 60998	Download PDF

Accessories

ABK 75/ 3	526204